

# VAL-MS-T1/T2 1000DC-PV/3+V-FM/32 - Lightning/surge arrester type 1/2



1044182

<https://www.phoenixcontact.com/gb/products/1044182>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Lightning current arrester / surge protective device for 2-pos. isolated and grounded 1,000 V DC PV voltage systems, for DIN rail mounting, 4-pos. base element with remote indication contact, four pluggable temperature-monitored protective elements, status message at each plug.

## Your advantages

- Quality proven millions of times over in the widest range of applications
- Rapid installation with bridges, thanks to industry-standard overall width of 1 HP
- Easy testing and insulation measurement, thanks to pluggable protection modules

## Commercial data

Item number	1044182
Packing unit	32 pc
Minimum order quantity	32 pc
Note	Made to order (non-returnable)
Sales key	CL1151
Product key	CL1151
GTIN	4055626621104
Weight per piece (including packing)	534.125 g
Weight per piece (excluding packing)	512.33 g
Customs tariff number	85363030
Country of origin	DE

# VAL-MS-T1/T2 1000DC-PV/3+V-FM/32 - Lightning/surge arrester type 1/2



1044182

<https://www.phoenixcontact.com/gb/products/1044182>

## Technical data

### Notes

#### General

Note	The device is intended for touch proof installation in a housing. Ensure that there is a gap of at least 8 mm between the active and grounded parts in the connection area.
------	---

### Product properties

Product type	PV arrester
Product family	VALVETRAB MS
IEC test classification	PV I / II PV T1 / T2
EN type	T1 / T2
IEC power supply system	DC
Type	DIN rail module, two-section, divisible
Distance between live and grounded parts	8 mm
Environment	Indoor
Installation location of the disconnect device	Internal
Accessibility	Accessible
Connection configuration	Y configuration
End-of-life mode	OCFM (Open-Circuit Failure Mode)
Surge protection fault message	Optical, remote indicator contact
Number of ports	One

#### Insulation characteristics

Overvoltage category	III
Pollution degree	2

### Electrical properties

#### Indicator/remote signaling

Connection name	Remote fault indicator contact
Switching function	Changeover contact
Operating voltage	5 V AC ... 250 V AC 30 V DC
Operating current	5 mA AC ... 1.5 A AC 1 A DC

### Connection data

Connection method	Screw connection
Screw thread	M5
Tightening torque	3 Nm (1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup> )

# VAL-MS-T1/T2 1000DC-PV/3+V-FM/32 - Lightning/surge arrester type 1/2



1044182

<https://www.phoenixcontact.com/gb/products/1044182>

	4.5 Nm (25 mm <sup>2</sup> ... 35 mm <sup>2</sup> )
Stripping length	16 mm
Conductor cross-section flexible	1.5 mm <sup>2</sup> ... 25 mm <sup>2</sup>
Conductor cross-section rigid	1.5 mm <sup>2</sup> ... 35 mm <sup>2</sup>
Conductor cross-section AWG	15 ... 2
Connection method	Fork-type cable lug
Conductor cross-section flexible	1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup>

## Remote fault indicator contact

Connection method	Plug-in/screw connection via COMBICON
Screw thread	M2
Tightening torque	0.25 Nm
Stripping length	7 mm
Conductor cross-section flexible	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross-section rigid	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross-section AWG	28 ... 16

## Dimensions

Dimensional drawing	
Width	71.2 mm
Height	98.7 mm
Depth	65.7 mm (incl. DIN rail 7.5 mm)
Horizontal pitch	4 Div.

## Material specifications

Color	black (RAL 9005)
Flammability rating according to UL 94	V-0
CTI value of material	600
Insulating material	PA 6.6-FR PBT-FR
Material group	I
Housing material	PA 6.6-FR PBT-FR

## Mechanical properties

### Mechanical data

Open side panel	No
-----------------	----

## Protective circuit

# VAL-MS-T1/T2 1000DC-PV/3+V-FM/32 - Lightning/surge arrester type 1/2



1044182

<https://www.phoenixcontact.com/gb/products/1044182>

Mode of protection	(DC+) - (DC-) (DC+/DC-) - PE
Direction of action	(L+)-PE & (L-)-PE & (L+)-(L-)
Rated load current $I_L$	80 A
Protective conductor current $I_{PE}$	$\leq 40 \mu\text{A DC}$ $\leq 700 \mu\text{A AC}$
Standby power consumption $P_C$	$\leq 25 \text{ mVA}$
Nominal discharge current $I_n$ (8/20) $\mu\text{s}$	15 kA
Maximum discharge current $I_{max}$ (8/20) $\mu\text{s}$	40 kA
Impulse discharge current (10/350) $\mu\text{s}$ , charge	2.5 As
Impulse discharge current (10/350) $\mu\text{s}$ , specific energy	6.25 kJ/ $\Omega$
Impulse discharge current (10/350) $\mu\text{s}$ , peak value $I_{imp}$	5 kA
Total discharge current $I_{Total}$ (8/20) $\mu\text{s}$	40 kA
Total discharge current $I_{Total}$ (10/350) $\mu\text{s}$	10 kA
Voltage protection level $U_p$ (DC+) - (DC-)	$\leq 3.5 \text{ kV}$
Voltage protection level $U_p$ (DC+/DC-) - PE	$\leq 3.2 \text{ kV}$
Response time $t_A$	$\leq 25 \text{ ns}$

## PV protective circuit

Connection configuration	Y configuration
End-of-life mode	OCFM (Open-Circuit Failure Mode)

## Protective circuit DC voltage side (DC)

Maximum continuous operating voltage $U_{CPV}$	1170 V DC
Short-circuit current rating $I_{SCPV}$	2000 A
Open-circuit voltage $U_{OCSTC}$	$\leq 975 \text{ V DC}$
Maximum discharge current $I_{max}$ (8/20) $\mu\text{s}$	40 kA
Response time $t_A$	$\leq 25 \text{ ns}$
Impulse discharge current (10/350) $\mu\text{s}$ , charge	2.5 As
Impulse discharge current (10/350) $\mu\text{s}$ , specific energy	6.25 kJ/ $\Omega$
Impulse discharge current (10/350) $\mu\text{s}$ , peak value $I_{imp}$	5 kA
Total discharge current $I_{Total}$ (8/20) $\mu\text{s}$	40 kA
Total discharge current $I_{Total}$ (10/350) $\mu\text{s}$	10 kA
Insulation resistance $R_{iso}$	$> 5 \text{ G}\Omega$ (at 500 V DC)
Nominal discharge current $I_n$ (8/20) $\mu\text{s}$	15 kA
Rated load current $I_L$	80 A
Continuous operating current $I_{CPV}$	$< 20 \mu\text{A}$
Maximum continuous operating voltage $U_{CPV}$	1170 V DC
Short-circuit current rating $I_{SCPV}$	2000 A
Protective conductor current $I_{PE}$	$\leq 40 \mu\text{A DC}$ $\leq 700 \mu\text{A AC}$
Standby power consumption $P_C$	$\leq 25 \text{ mVA}$

# VAL-MS-T1/T2 1000DC-PV/3+V-FM/32 - Lightning/surge arrester type 1/2



1044182

<https://www.phoenixcontact.com/gb/products/1044182>

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20 (only when all terminal points are used)
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	≤ 3000 m (amsl)
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	25g (Half-sine / 11 ms / 3x ±X, ±Y, ±Z)
Vibration (operation)	5g (5-500 Hz/2.5 h/XYZ)

## Standards and regulations

Standards/specifications	EN 61643-31
Note	2019
Standards/specifications	IEC 61643-31
Note	2018

## Mounting

Mounting type	DIN rail: 35 mm
---------------	-----------------


# VAL-MS-T1/T2 1000DC-PV/3+V-FM/32 - Lightning/surge arrester type 1/2

1044182


<https://www.phoenixcontact.com/gb/products/1044182>

## Drawings

Dimensional drawing

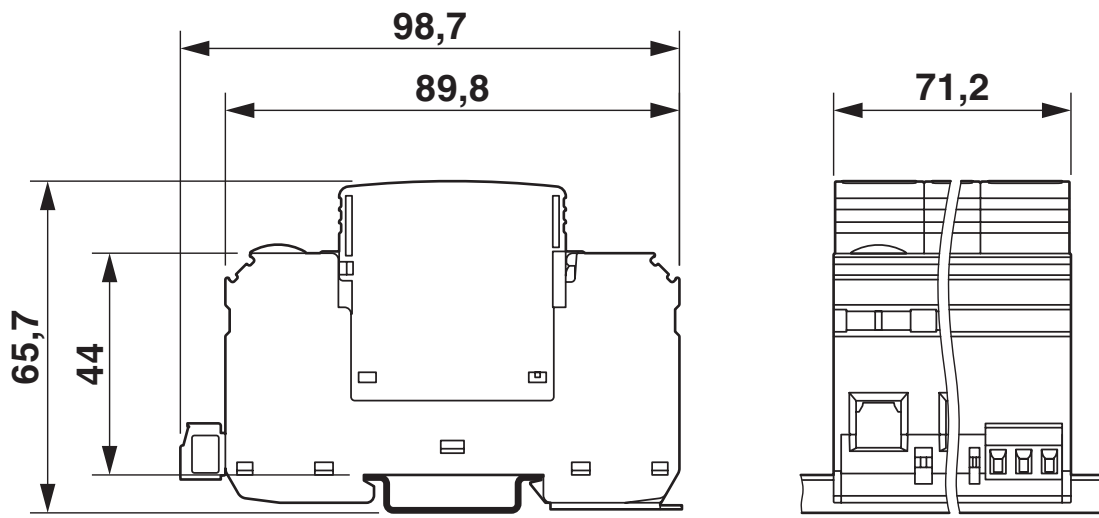

Circuit diagram

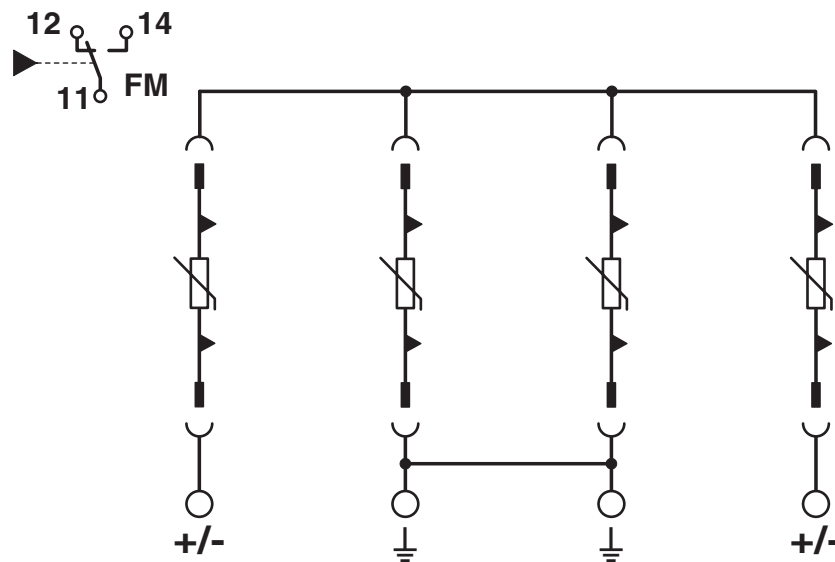

# VAL-MS-T1/T2 1000DC-PV/3+V-FM/32 - Lightning/surge arrester type 1/2



1044182

<https://www.phoenixcontact.com/gb/products/1044182>

## Classifications

### ECLASS

ECLASS-13.0	27171403
-------------	----------

### ETIM

ETIM 9.0	EC001457
----------	----------

### UNSPSC

UNSPSC 21.0	39121620
-------------	----------

# VAL-MS-T1/T2 1000DC-PV/3+V-FM/32 - Lightning/surge arrester type 1/2



1044182

<https://www.phoenixcontact.com/gb/products/1044182>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd  
Halesfield 13, Telford  
Shropshire, TF7 4PG  
01952 681700  
[info@phoenixcontact.co.uk](mailto:info@phoenixcontact.co.uk)