

# PLC-RPT-230UC/21-21AU/RWF - Relay module



2900345

<https://www.phoenixcontact.com/us/products/2900345>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



PLC-INTERFACE for railway applications, consisting of basic terminal block with Push-in connection and plug-in miniature relay with multi-layer gold contact, range: 0.75 x UN to 1.15 x UN, nominal input frequency 16.7 Hz, 2 changeover contacts, input voltage 230 V AC

## Your advantages

- Vibration and shock resistance in accordance with EN 50155
- Safe isolation between coil and contact side
- Nominal input frequency of 16.7 Hz
- Screw- and Push-in connection

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 2900345       |
| Packing unit                         | 10 pc         |
| Minimum order quantity               | 10 pc         |
| Sales key                            | C461          |
| Product key                          | DK62BL        |
| GTIN                                 | 4046356507547 |
| Weight per piece (including packing) | 62.41 g       |
| Weight per piece (excluding packing) | 60.2 g        |
| Customs tariff number                | 85364900      |
| Country of origin                    | DE            |

## Technical data

### Product properties

|                         |                                |
|-------------------------|--------------------------------|
| Product type            | Relay Module                   |
| Product family          | PLC-INTERFACE                  |
| Application             | Railway applications           |
| Operating mode          | 100% operating factor          |
| Mechanical service life | approx. $3 \times 10^7$ cycles |

Insulation characteristics: Air clearances and creepage distances between the power circuits

|                      |                  |
|----------------------|------------------|
| Insulation           | Basic insulation |
| Overvoltage category | III              |
| Pollution degree     | 2                |

Data management status

|                              |            |
|------------------------------|------------|
| Date of last data management | 01.04.2026 |
|------------------------------|------------|

### Electrical properties

|   |                                       |
|---|---------------------------------------|
| Maximum power dissipation for nominal condition | 1.1 W                                 |
| Test voltage (Winding/contact)                  | 6 kV (50 Hz, 1 min., winding/contact) |

Air clearances and creepage distances between the power circuits

|                          |          |
|--------------------------|----------|
| Rated insulation voltage | 250 V AC |
| Rated surge voltage      | 6 kV     |

### Input data

Coil side

|  |                                   |
|--|-----------------------------------|
| Nominal input voltage $U_N$                          | 230 V AC                          |
| Input voltage range                                  | 172.5 V AC ... 264.5 V AC (20 °C) |
| Nominal voltage (plugged-in electromechanical relay) | 110 V DC                          |
| Mains frequency                                      | 16.67 Hz                          |
| Drive and function                                   | monostable                        |
| Drive (polarity)                                     | polarized                         |
| Typical input current at $U_N$                       | 4.8 mA (with AC)                  |
| Typical response time                                | 20 ms                             |
| Typical release time                                 | 60 ms                             |
| Protective circuit                                   | Bridge rectifier                  |
| Operating voltage display                            | Yellow LED                        |

### Output data

Switching

|                        |                        |
|------------------------|------------------------|
| Contact switching type | 2 changeover contacts  |
| Type of switch contact | Single contact         |
| Contact material       | AgNi, hard gold-plated |

# PLC-RPT-230UC/21-21AU/RWF - Relay module



2900345

<https://www.phoenixcontact.com/us/products/2900345>

|                                       |   |
|---------------------------------------|---|
| Note                                  | If the specified maximum values are exceeded, the gold plating is destroyed. The AgNi contact values are then valid for further operation; a reduction in length of service life is to be expected. |
| Maximum switching voltage             | 30 V AC   |
|                                       | 36 V DC   |
| Minimum switching voltage             | 100 mV  |
| Limiting continuous current           | 50 mA   |
| Maximum inrush current                | 50 mA   |
| Min. switching current                | 1 mA  |
| Interrupting rating (ohmic load) max. | 1.2 W (24 V DC)   |
| Switching capacity                    | 2 A (24 V (DC13), in acc. with DIN VDE 0660/IEC 60947)  |
|                                       | 0.2 A (220 V DC / 230 V AC (DC13), in acc. with DIN VDE 0660/IEC 60947)   |
|                                       | 3 A (220 V DC / 230 V AC (AC15), in acc. with DIN EVDE 0660/IEC 60947)  |

Switching: when the gold layer is destroyed

|                                       |   |
|---------------------------------------|---|
| Note                                  | the following values are applicable if a gold layer is destroyed  |
| Contact material                      | AgNi  |
| Maximum switching voltage             | 250 V AC/DC (Separating plate PLC-ATP must be installed for voltages larger than 250 V (L1, L2, L3) between identical terminal blocks in adjacent modules.) |
| Minimum switching voltage             | 5 V AC/DC   |
| Limiting continuous current           | 6 A   |
| Maximum inrush current                | 8 A   |
| Min. switching current                | 10 mA   |
| Interrupting rating (ohmic load) max. | 140 W (at 24 V DC)  |
|                                       | 85 W (at 48 V DC)   |
|                                       | 60 W (at 60 V DC)   |
|                                       | 44 W (at 110 V DC)  |
|                                       | 60 W (at 220 V DC)  |
|                                       | 1500 VA (for 250 V AC)  |
| Switching capacity                    | 2 A (at 24 V, DC13)   |
|                                       | 0.2 A (at 110 V, DC13)  |
|                                       | 0.2 A (at 250 V, DC13)  |
|                                       | 2 A (at 24 V, AC15)   |
|                                       | 2 A (at 120 V, AC15)  |
|                                       | 2 A (at 250 V, AC15)  |

## Connection data

|                                  |  |
|----------------------------------|--|
| Connection method                | Push-in connection   |
| Stripping length                 | 10 mm  |
| Conductor cross-section rigid    | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>                 |
| Conductor cross-section flexible | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>                 |
|                                  | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> (Single ferrule) |

# PLC-RPT-230UC/21-21AU/RWF - Relay module



2900345

<https://www.phoenixcontact.com/us/products/2900345>

|                             |   |
|-----------------------------|---|
|                             | 2x 0.5 mm <sup>2</sup> ... 1 mm <sup>2</sup> (TWIN ferrule) |
| Conductor cross-section AWG | 26 ... 14   |

## Dimensions

### Item dimensions

|        |       |
|--------|-------|
| Width  | 14 mm |
| Height | 80 mm |
| Depth  | 94 mm |

## Material specifications

|  |                 |
|--|-----------------|
| Color  | gray (RAL 7042) |
| Flammability rating according to UL 94 (Housing) | V0 (Housing)    |

## Environmental and real-life conditions

### Ambient conditions

|   |                   |
|---|-------------------|
| Degree of protection (Relay)            | RT III (Relay)    |
| Degree of protection (Relay base)       | IP20 (Relay base) |
| Ambient temperature (operation)         | -25 °C ... 55 °C  |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C  |

## Approvals

### CE

|             |              |
|-------------|--------------|
| Certificate | CE-compliant |
|-------------|--------------|

### Corrosive gas test

|                |                            |
|----------------|----------------------------|
| Identification | ISA-S71.04. G3 Harsh Group |
|                | EN 60068-2-60              |

## EMC data

|                               |  |
|-------------------------------|--|
| Electromagnetic compatibility | Conformance with EMC directive         |
| Low Voltage Directive         | Conformance with Low Voltage Directive |

## Standards and regulations

### Air clearances and creepage distances between the power circuits


|                       |               |
|-----------------------|---------------|
| Standards/regulations | IEC 60947-5-1 |
|-----------------------|---------------|

## Mounting

|                   |                           |
|-------------------|---------------------------|
| Mounting type     | DIN rail mounting         |
| Assembly note     | in rows with zero spacing |
| Mounting position | any                       |

Drawings

Diagram

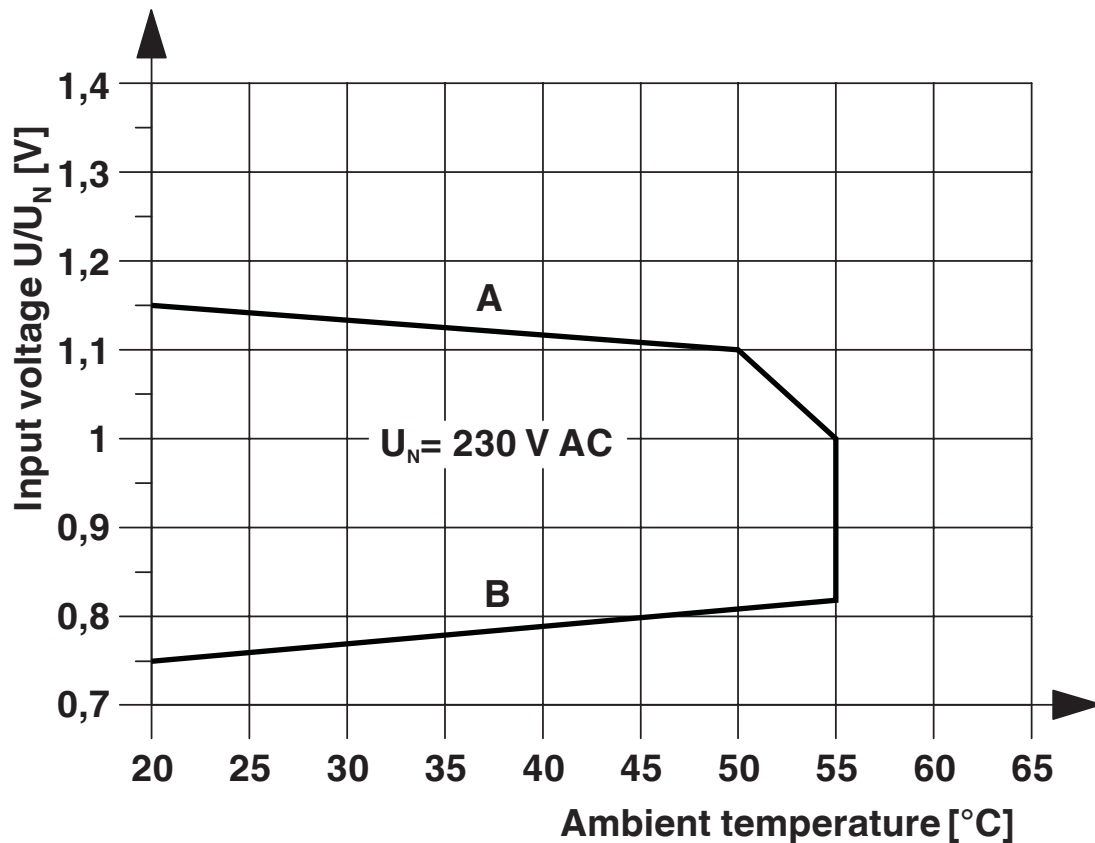

**Curve A:**  
 Maximum continuous operating voltage  
 at limiting continuous current = 6 A

**Curve B:**  
 Minimum relay operating voltage at initial  
 trigger with  $U_N$  and limiting continuous current = 6 A

Diagram



Permissible humidity for operation and storage.


The maximum permissible ambient temperature as specified in the data sheet must be observed.

Area A: Ice buildup at ambient temperatures ≤ 0°C must be prevented

Area B: Condensation at ambient temperatures > 0°C must be prevented

On 30 full days that are naturally distributed across an entire year, a humidity level of 95% is permissible at an ambient temperature ≤ 25°C.

Circuit diagram

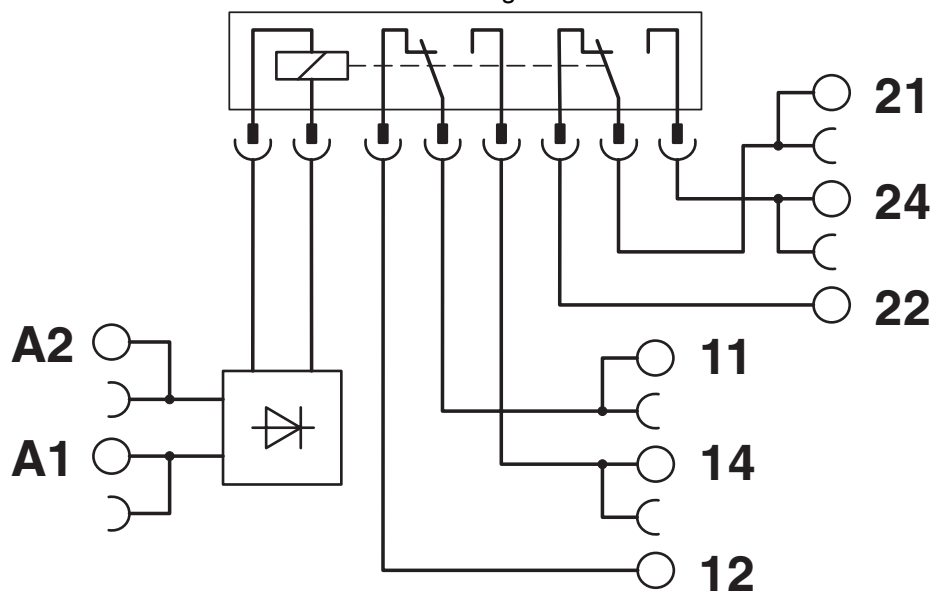

# PLC-RPT-230UC/21-21AU/RWF - Relay module



2900345

<https://www.phoenixcontact.com/us/products/2900345>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2900345>



**EAC**

Approval ID: RU\*C-DE.\*08.B.00010



**cULus Listed**

Approval ID: E140324



**cUL Recognized**

Approval ID: E238705



**UL Recognized**

Approval ID: E238705



**UL Listed**

Approval ID: FILE E 172140



**cUL Listed**

Approval ID: FILE E 172140



**cULus Listed**

Approval ID: E140324

# PLC-RPT-230UC/21-21AU/RWF - Relay module



2900345

<https://www.phoenixcontact.com/us/products/2900345>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27371601 |
| ECLASS-15.0 | 27371601 |

### ETIM

|           |          |
|-----------|----------|
| ETIM 10.0 | EC001437 |
|-----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39122300 |
|-------------|----------|

2900345

<https://www.phoenixcontact.com/us/products/2900345>

## Environmental product compliance

### EU RoHS

|   |              |
|---|--------------|
| Fulfills EU RoHS substance requirements | Yes          |
| Exemption                               | 7(a), 7(c)-I |

### China RoHS

|  |   |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50   |
|  | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | 51af4727-bf83-4f82-b09c-b61dc7728466 |

### EF3.1 Climate Change

|         |               |
|---------|---------------|
| CO2e kg | 1.856 kg CO2e |
|---------|---------------|

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
 586 Fulling Mill Road  
 Middletown, PA 17057, United States  
 (+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)