

# EIK1-SVN-24P - Solid-state relay module



2940799

<https://www.phoenixcontact.com/us/products/2940799>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Switching amplifier electronic terminal block, for inductive proximity sensors acc. to NAMUR, with light indicators for sensor signal and faults

## Your advantages

- Bridging and labeling with standard terminal block accessories
- Error indication via LED
- Monitoring of initiator side for short circuits or wire breaks
- Status indication (high signal) via green LED
- Suitable resistance circuit to enable monitoring of mechanical switches
- 24 V/50 mA digital output

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 2940799       |
| Packing unit                         | 10 pc         |
| Minimum order quantity               | 1 pc          |
| Sales key                            | C460          |
| Product key                          | DK61A3        |
| GTIN                                 | 4017918080242 |
| Weight per piece (including packing) | 22.17 g       |
| Weight per piece (excluding packing) | 21.1 g        |
| Customs tariff number                | 85365019      |
| Country of origin                    | CN            |

# EIK1-SVN-24P - Solid-state relay module



2940799

<https://www.phoenixcontact.com/us/products/2940799>

## Technical data

### Notes

|                     |   |
|---------------------|---|
| Note on application | Use of EB 80-DIK... bridges in the DEK terminal blocks:<br>Absorption of humidity from the ambient air as well as an unfavorable tolerance between a larger number of DEK terminal blocks and the EB 80-DIK... bridge may cause (minor) expansion of the DEK housing. When the EB 80-DIK... bridges are used, therefore, it is recommended that these be disconnected after about 10 to 12 DEK terminal blocks and a wire bridge to the next DEK terminal block be inserted in their place. |
|---------------------|---|

### Product properties

|                |                          |
|----------------|--------------------------|
| Product type   | Solid-state relay module |
| Product family | DEK                      |
| Application    | NAMUR proximity sensors  |

#### Insulation characteristics: Air clearances and creepage distances

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Pollution degree     | 2   |

#### Data management status

|                              |            |
|------------------------------|------------|
| Date of last data management | 01.04.2026 |
|------------------------------|------------|

### Input data

#### Control circuit

|                             |   |
|-----------------------------|---|
| Nominal input voltage $U_N$ | 8.2 V DC $\pm 10\%$   |
| Error indication            | visual short-circuit and wire break control with LED (red)  |
| Protective circuit          | 12 V Zener diode; 12 V Zener diode  |
| Transmission frequency      | 1 kHz   |
| Switching point             | $\geq 2.1$ mA (In conductive state)<br>$\leq 1.2$ mA (In blocking state)<br>6.3 mA ... 10 mA (in the event of a short-circuit)<br>0 mA ... 0.35 mA (In the event of a wire break) |
| Switching hysteresis        | approx. 0.2 mA  |
| Internal resistance         | approx. 1 k $\Omega$  |

### Output data

|  |  |
|--|--|
| Designation                                      | Signal output  |
| Contact switching type                           | 1 N/O contact  |
| Design of digital output                         | electronic   |
| Output nominal voltage                           | $\leq 100$ mV (In conductive state)<br>$U_{VN} - U_{Ri}$ ; in blocking state |
| Limiting continuous current                      | 50 mA  |
| Voltage drop at max. limiting continuous current | $\leq 1.5$ V ( $U_R$ )   |
| Protective circuit                               | 36 V Zener diode as free-wheeling diode; 36 V Zener diode as                 |

# EIK1-SVN-24P - Solid-state relay module



2940799

<https://www.phoenixcontact.com/us/products/2940799>

free-wheeling diode

## Connection data

### Input side

|                                  |   |
|----------------------------------|---|
| Connection method                | Screw connection                            |
| Stripping length                 | 8 mm  |
| Screw thread                     | M3  |
| Conductor cross-section rigid    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross-section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross-section AWG      | 24 ... 12                                   |
| Tightening torque                | 0.5 Nm                                      |

### Output side

|                                  |   |
|----------------------------------|---|
| Connection method                | Screw connection                            |
| Stripping length                 | 8 mm  |
| Screw thread                     | M3  |
| Conductor cross-section rigid    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross-section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross-section AWG      | 24 ... 12                                   |
| Tightening torque                | 0.5 Nm                                      |

## Dimensions

### Item dimensions

|        |        |
|--------|--------|
| Width  | 6.2 mm |
| Height | 80 mm  |
| Depth  | 56 mm  |

## Environmental and real-life conditions

### Ambient conditions

|   |                  |
|---|------------------|
| Ambient temperature (operation)         | -25 °C ... 50 °C |
| Ambient temperature (storage/transport) | -25 °C ... 70 °C |

## Standards and regulations

### Air clearances and creepage distances

|                       |              |
|-----------------------|--------------|
| Standards/regulations | IEC 60664    |
|                       | EN 61000-6-2 |
|                       | EN 61000-6-4 |

## Mounting

|                   |                           |
|-------------------|---------------------------|
| Mounting type     | DIN rail mounting         |
| Assembly note     | in rows with zero spacing |
| Mounting position | any                       |


# EIK1-SVN-24P - Solid-state relay module

2940799

<https://www.phoenixcontact.com/us/products/2940799>

## Drawings

### Application drawing

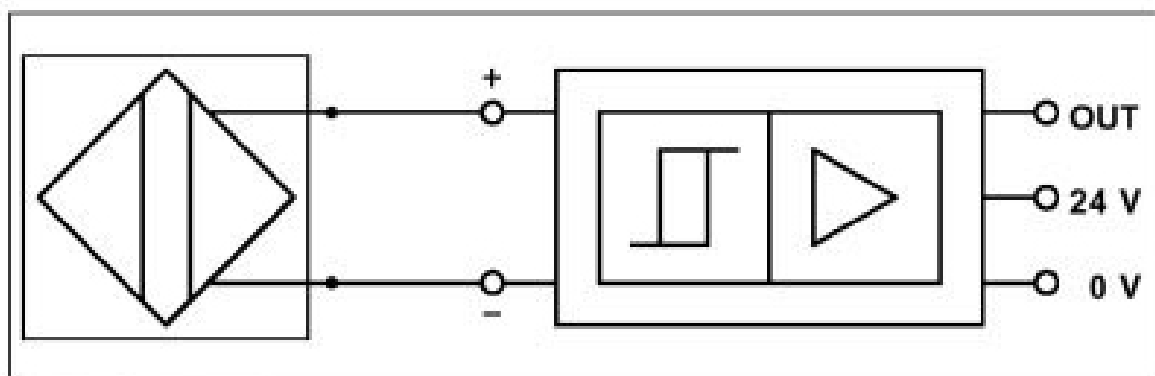


NAMUR initiator

# EIK1-SVN-24P - Solid-state relay module

2940799


<https://www.phoenixcontact.com/us/products/2940799>

Application drawing

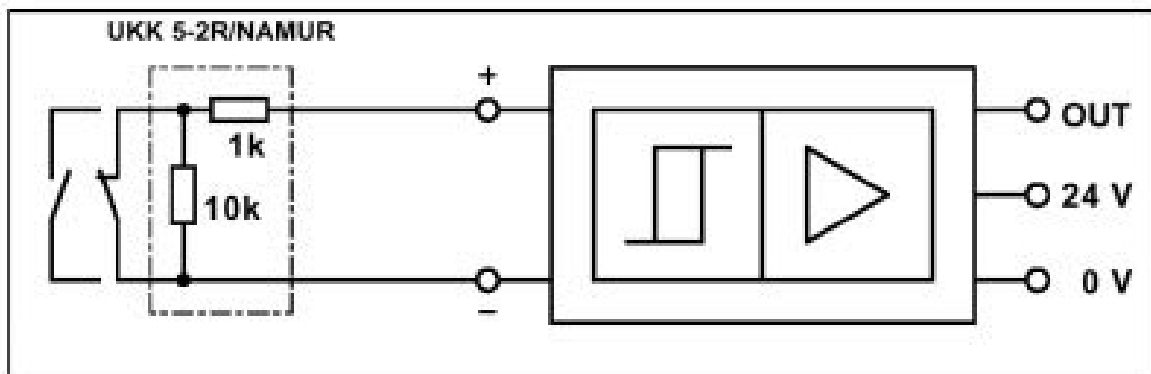

Limit switch

Diagram

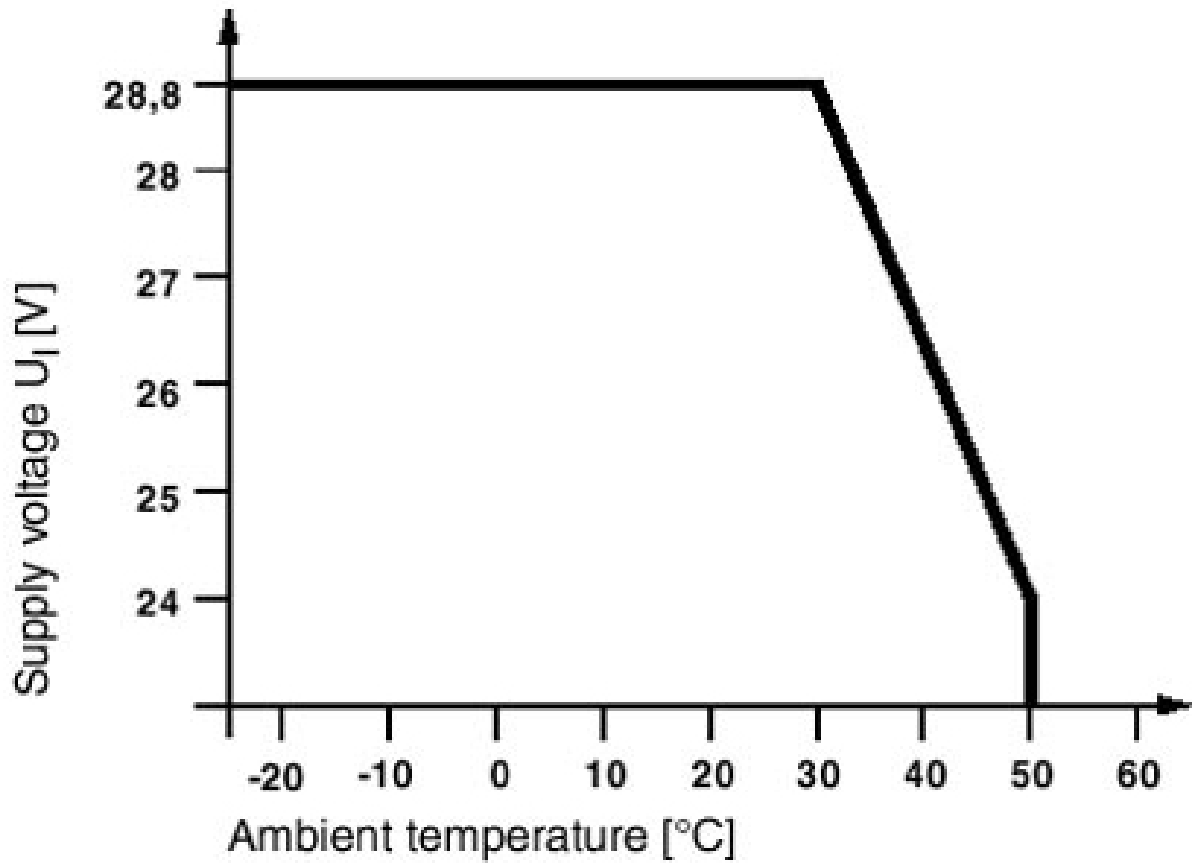


# EIK1-SVN-24P - Solid-state relay module



2940799

<https://www.phoenixcontact.com/us/products/2940799>

Circuit diagram

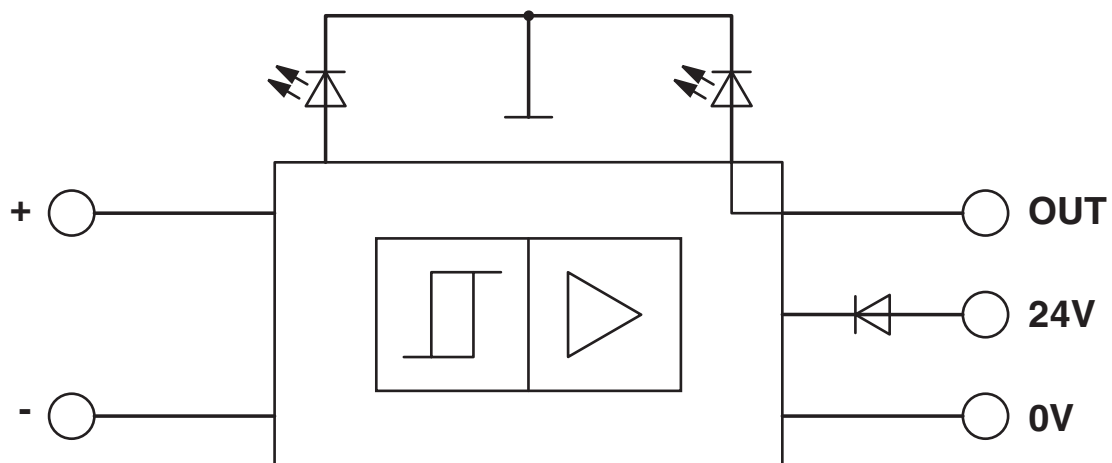

# EIK1-SVN-24P - Solid-state relay module



2940799

<https://www.phoenixcontact.com/us/products/2940799>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2940799>



**EAC**

Approval ID: RU C-DE.A\*30.B.01742

# EIK1-SVN-24P - Solid-state relay module



2940799

<https://www.phoenixcontact.com/us/products/2940799>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27371604 |
| ECLASS-15.0 | 27371604 |

### ETIM

|           |          |
|-----------|----------|
| ETIM 10.0 | EC001504 |
|-----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39122300 |
|-------------|----------|

# EIK1-SVN-24P - Solid-state relay module



2940799

<https://www.phoenixcontact.com/us/products/2940799>

## Environmental product compliance

### EU RoHS

|   |              |
|---|--------------|
| Fulfills EU RoHS substance requirements | Yes          |
| Exemption                               | 7(a), 7(c)-I |

### China RoHS

|  |   |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50   |
|  | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |   |
|-------------------------------------|---|
| REACH candidate substance (CAS No.) | Hexahydromethylphthalic anhydride(CAS: n/a) |
|                                     | Lead(CAS: 7439-92-1)                        |
| SCIP                                | 7292917c-6a09-4aa5-afdc-545bf23216fa        |

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)