

RS20-US-S0203-0202-014H-001 - Off switch



3069709

<https://www.phoenixcontact.com/us/products/3069709>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Off switch, connection method: Screw connection, number of positions: 4, function: 0 - 1, switching zones: 2, switching program number: S0203, rated continuous current: 20 A, voltage: 690 V

Your advantages

- The compact rotary switch is designed for use in energy technology applications with the available switching programs
- The use of high-quality materials results in a long mechanical and electrical service life
- Comprehensive approvals ensure international use
- High level of safety thanks to non-conductive plastic parts
- The terminal points are designed in such a way that shock protection according to BGV A2 is ensured
- The rotary switch is free from cadmium and compliant with the RoHS directive

Commercial data

Item number	3069709
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	BE06
Product key	BE6121
GTIN	4046356771559
Weight per piece (including packing)	103.7 g
Weight per piece (excluding packing)	100.3 g
Customs tariff number	85365080
Country of origin	AT

3069709

<https://www.phoenixcontact.com/us/products/3069709>

Technical data

Product properties

Number of positions	4
Number of connections	8
Rotary switch function	0 - 1
Switching program number	S0203


Electrical properties

Maximum load current	20 A
Rated insulation voltage	690 V (Valid for networks with grounded neutral point, overvoltage category III, degree of pollution 3)
Rated surge voltage	6 kV
Nominal current I_N	20 A

Connection data

Maximum load current	20 A
Connection method	Screw connection
Tightening torque	0.7 ... 0.8 Nm
Stripping length	8 mm
Conductor cross-section rigid	0.5 mm ² ... 2.5 mm ²
Cross section AWG	20 ... 14 (converted acc. to IEC)
Conductor cross-section flexible	0.75 mm ² ... 2.5 mm ²
Conductor cross-section, flexible [AWG]	18 ... 14 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	2.5 mm ² ... 2.5 mm ²
Flexible conductor cross-section (ferrule with plastic sleeve)	1.5 mm ² ... 1.5 mm ²
2 conductors with same cross section, rigid	0.5 mm ² ... 2.5 mm ²
2 conductors with the same cross-section AWG rigid	20 ... 14 (converted acc. to IEC)
2 conductors with same cross section, flexible	0.75 mm ² ... 2.5 mm ²
2 conductors with the same cross-section AWG flexible	18 ... 14 (converted acc. to IEC)
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	2.5 mm ² ... 2.5 mm ²
2 conductors with the same cross section, flexible, with ferrule with plastic sleeve	1.5 mm ² ... 1.5 mm ²
Nominal voltage	690 V

Dimensions

Dimensional drawing	
Width	48 mm

RS20-US-S0203-0202-014H-001 - Off switch



3069709

<https://www.phoenixcontact.com/us/products/3069709>

Height	48 mm
Length	72 mm
Hole diameter	7 mm

Installation dimensions

Installation depth	43 mm
--------------------	-------

Material specifications

Color	silver/black
Material	PA
Flammability rating according to UL 94	V0
Components	Free from halogen and cadmium

Environmental and real-life conditions

Degree of protection (IP code)

Degree of protection	IP65
----------------------	------

Ambient conditions


Ambient temperature (operation)	-35 °C ... 55 °C (Open, at 100% load, with peaks up to 60°C)
	-35 °C ... 35 °C (Encapsulated, at 100% load, with peaks up to 60°C)

Mounting


Mounting type	direct screw connection
---------------	-------------------------

Drawings

Dimensional drawing

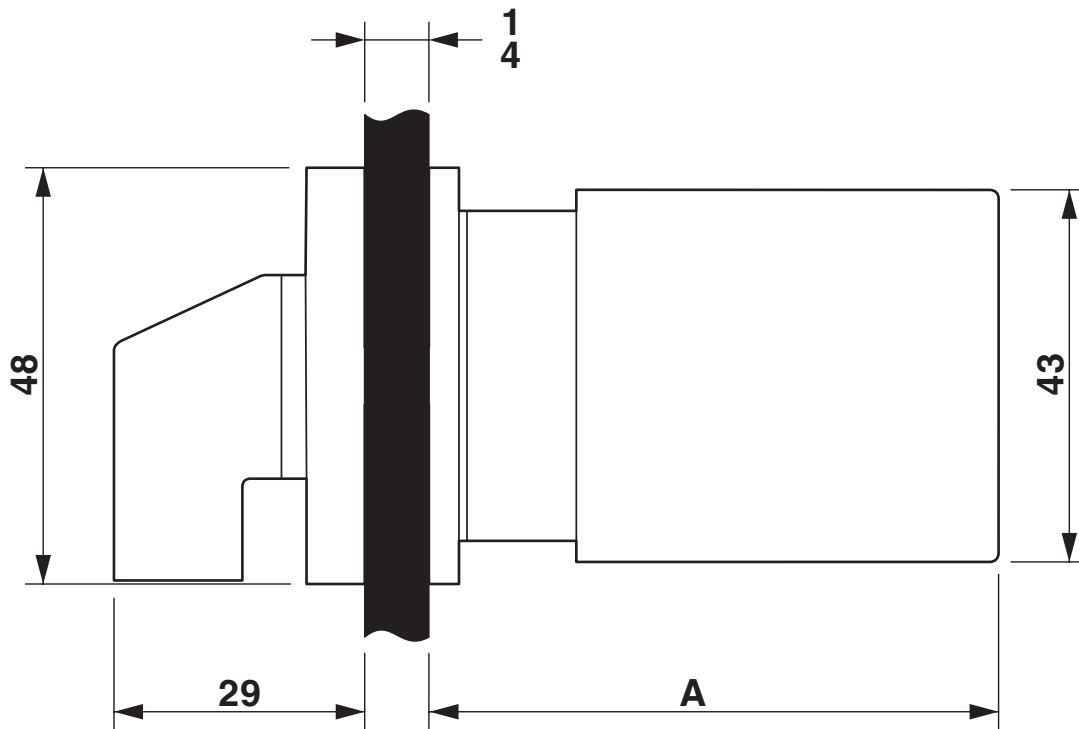

Circuit diagram




S0203

	1	3	5	7
	2	4	6	8
0				
1	×	×	×	×

3069709

<https://www.phoenixcontact.com/us/products/3069709>

Drilling plan/solder pad geometry

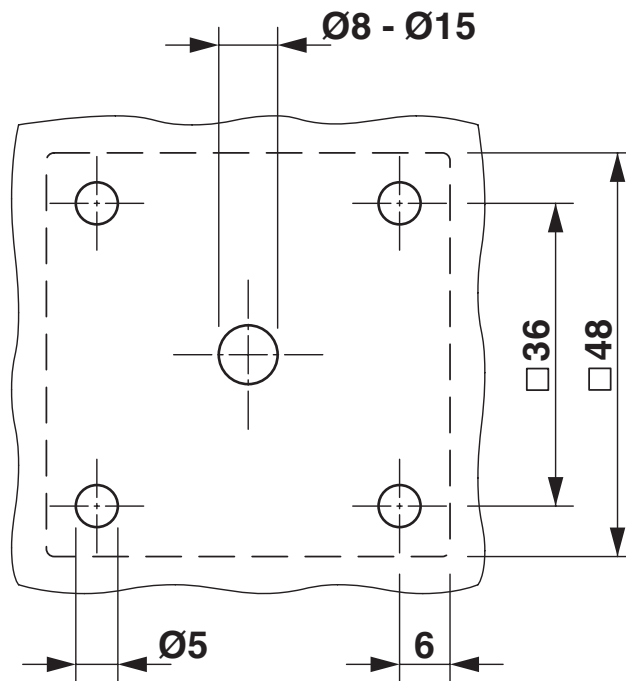

RS20-US-S0203-0202-014H-001 - Off switch



3069709

<https://www.phoenixcontact.com/us/products/3069709>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com