

# TTC-6P-3-EX-24DC-UT-I - Surge protection device



1064665

<https://www.phoenixcontact.com/us/products/1064665>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Surge protection, consisting of protective plug and base element, with integrated status indicator for a 3-wire floating Ex i signal circuit, HART-compatible. Can be used in safety-related circuits up to SIL 3.

## Your advantages

- Space-saving and cost-saving with a narrow overall width of just 6 mm
- Continuous monitoring of protective devices, plus mechanical status indicator with optional remote signaling
- Finding the right product for all possible requirements in MCR applications is easy, thanks to the complete range of products with customized features
- Easy testing and documentation with CHECKMASTER 2 with pluggable protective modules
- The signal is not influenced during maintenance work, thanks to the impedance-neutral insertion and removal of protective plugs

## Commercial data

Item number	1064665
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CL23
Product key	CL2163
GTIN	4055626722733
Weight per piece (including packing)	68 g
Weight per piece (excluding packing)	65.1 g
Customs tariff number	85363010
Country of origin	DE

# TTC-6P-3-EX-24DC-UT-I - Surge protection device



1064665

<https://www.phoenixcontact.com/us/products/1064665>

## Technical data

### Product properties

Product type	Surge protection for information technology
Product family	TERMITRAB complete
IEC test classification	C1
	C2
	C3
	D1
Type	DIN rail module, two-section, divisible

### Insulation characteristics

Overvoltage category	III
Pollution degree	2

### Electrical properties

Nominal voltage $U_N$	24 V DC
-----------------------	---------

### Connection data

Connection method	Screw connection
Screw thread	M3
Tightening torque	0.5 Nm ... 0.6 Nm
Conductor cross-section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section rigid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross-section AWG	24 ... 12

### Ex data

Maximum inner capacitance $C_i$	negligible
Max. internal inductance $L_i$	negligible
Max. input current $I_i$	400 mA (T4 / -40 °C ... +50 °C)
	250 mA (T4 / -40 °C ... +70 °C)
	350 mA (T6 / -40 °C ... +35 °C)
	100 mA (T6 / -40 °C ... +70 °C)
Max. input voltage $U_i$	30 V DC
Ambient temperature (operation)	-40 °C ... 70 °C (with current derating)

### Dimensions

Dimensional drawing	
Width	6.2 mm +0.1 mm
Height	105.8 mm

# TTC-6P-3-EX-24DC-UT-I - Surge protection device



1064665

<https://www.phoenixcontact.com/us/products/1064665>

Depth	100 mm (incl. DIN rail 7.5 mm)
-------	--------------------------------

## Material specifications

Color	blue (RAL 5015)
	light gray (RAL 7035)
Flammability rating according to UL 94	V-0
Insulating material	PBT
Housing material	PBT

## Mechanical properties

### Mechanical data

Open side panel	No
-----------------	----

## Protective circuit

Direction of action	Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground
Nominal voltage $U_N$	24 V DC
Maximum continuous operating voltage $U_C$	30 V DC
Rated current	5 A (55 °C)
Operating effective current $I_C$ at $U_C$	$\leq 5 \mu\text{A}$
Protective conductor current $I_{PE}$	$\leq 1 \mu\text{A}$
Nominal discharge current $I_n$ (8/20) $\mu\text{s}$ (line-line)	0.5 kA
Nominal discharge current $I_n$ (8/20) $\mu\text{s}$ (line-ground)	5 kA
Pulse discharge current $I_{imp}$ (10/350) $\mu\text{s}$ (line-earth)	0.5 kA
Total discharge current $I_{Total}$ (8/20) $\mu\text{s}$	10 kA
Voltage protection level $U_p$ (line-line)	$\leq 68 \text{ V}$ (C1 - 1 kV / 500 A)
	$\leq 50 \text{ V}$ (C3 - 100 A)
	$\leq 50 \text{ V}$ (C3 - 25 A)
Voltage protection level $U_p$ (line-earth)	$\leq 700 \text{ V}$ (C1 - 1 kV / 500 A)
	$\leq 900 \text{ V}$ (C2 - 10 kV / 5 kA)
Response time $t_A$ (line-line)	$\leq 1 \text{ ns}$
Response time $t_A$ (line-earth)	$\leq 100 \text{ ns}$
Input attenuation aE, sym.	typ. 0.3 dB ( $\leq 12 \text{ MHz}$ / 150 $\Omega$ )
Cut-off frequency $f_g$ (3 dB), sym. in 150 $\Omega$ system	typ. 60 MHz
Capacity (Core-Core)	typ. 30 pF
Capacity (Core-Earth)	typ. 30 pF
Resistance per path	$< 0.1 \Omega$
Surge protection fault message	optical
Max. required back-up fuse	5 A (F)
Impulse durability (line-line)	C1 - 1 kV / 500 A
	C3 - 100 A
Impulse durability (line-earth)	C1 - 1 kV / 500 A
	C2 - 10 kV / 5 kA
	D1 - 500 A

# TTC-6P-3-EX-24DC-UT-I - Surge protection device



1064665

<https://www.phoenixcontact.com/us/products/1064665>

Pulse reset time (line-line)	≤ 30 ms
Pulse reset time (line-earth)	≤ 500 ms

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	≤ 2000 m (amsl)
Permissible humidity (operation)	5 % ... 95 %

## Approvals

### Conformity/Approvals

UL, USA / Canada	Class I, Div. 2, Groups A, B, C, D T4A
------------------	--

## Standards and regulations

Standards/specifications	EN 60079-0
Note	2018
Standards/specifications	EN 60079-11
Note	2012

### EN 61643-21

Standards/specifications	EN 61643-21
Note	2001 + A1:2009 + A2:2013
Standards/specifications	IEC 60079-0
Note	2017
Standards/specifications	IEC 60079-11
Note	2008
Standards/specifications	IEC 61643-21
Note	2000 + corrigendum 2001 + A1:2008, modified + A2:2012

## Mounting

Mounting type	DIN rail: TH 35 - 7.5 mm
---------------	--------------------------

# TTC-6P-3-EX-24DC-UT-I - Surge protection device




1064665

<https://www.phoenixcontact.com/us/products/1064665>

## Drawings

Dimensional drawing

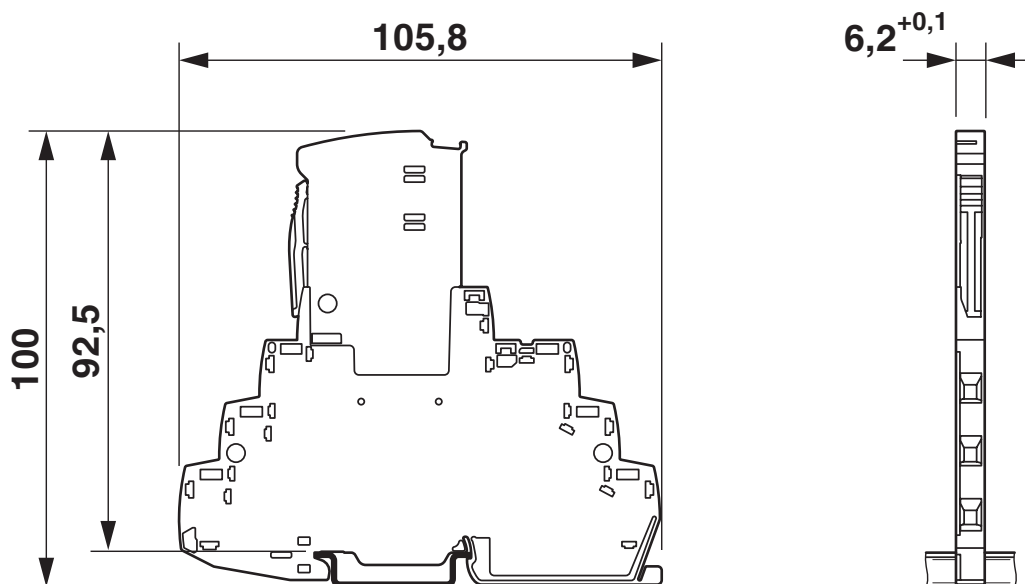


Schematic diagram

TTC-6P-3-...DC-...-I									
Category	1oo1 architecture, HFT=0				1oo2 architecture, HFT=1				
	PFD <sub>AVG</sub>	PFH	Used budget of SIL 2 SIF		PFD <sub>AVG</sub>	PFH	CCF	Used budget of SIL 3 SIF	
			PFD <sub>AVG</sub>	PFH				PFD <sub>AVG</sub>	PFH
	9.22x10 <sup>-5</sup>	1.64x10 <sup>-8</sup> 1/h	0.9 %	1.6 %	4.62x10 <sup>-6</sup>	8.22x10 <sup>-10</sup> 1/h	5 %	0.5 %	0.8 %
					9.00x10 <sup>-6</sup>	1.64x10 <sup>-9</sup> 1/h	10 %	0.9 %	1.6 %
Calculation based on exida report, Phoenix Contact 16/06-072 R022 V4R2 exida Profile 1, FMEDA Analysis 2, T <sub>proof</sub> : 1 year, MT: 10 years, MTTR: 24 hours, PTC: 99% Used standards IEC/EN 61508, edition 2010 (device specific) IEC/EN 61511, edition 2016 + COR1:2016 + A1:2017 (system specific)									

## Functional safety scenarios

Circuit diagram

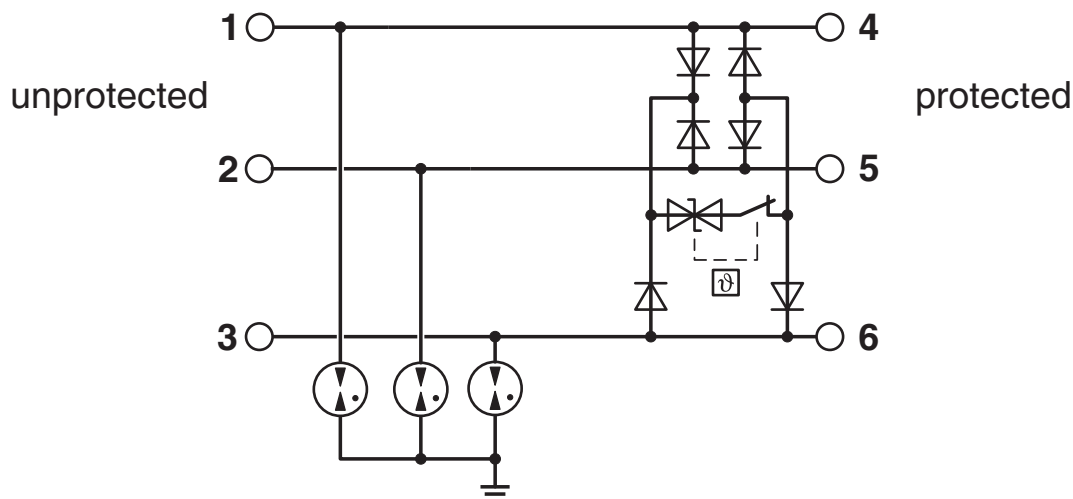

1064665

<https://www.phoenixcontact.com/us/products/1064665>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1064665>



### UL Listed

Approval ID: FILE E 138168



### DNV GL

Approval ID: TAE000027G

### UAE-RoHS

Approval ID: 22-06-16781

### Functional Safety

Approval ID: 16-06-072 R022 V4R3



### UL Listed

Approval ID: FILE E 138168



### cUL Listed

Approval ID: FILE E 333250



### UL Listed

Approval ID: FILE E 333250

### INMETRO

Approval ID: 19.0077 X



### NEPSI-EX

Approval ID: GYJ20.1114X



### CCC

Approval ID: 2020322316000780



### UKCA-EX

Approval ID: DEKRA 23UKEX0110X

# TTC-6P-3-EX-24DC-UT-I - Surge protection device



1064665

<https://www.phoenixcontact.com/us/products/1064665>



**cULus Listed**

Approval ID: File E 333250



**IECEx**

Approval ID: IECEx BVS 16.0090X



**ATEX**

Approval ID: BVS 16 ATEX E 125 X

# TTC-6P-3-EX-24DC-UT-I - Surge protection device



1064665

<https://www.phoenixcontact.com/us/products/1064665>

## Classifications

### ECLASS

ECLASS-13.0	27171502
ECLASS-15.0	27171502

### ETIM

ETIM 10.0	EC001625
-----------	----------

### UNSPSC

UNSPSC 21.0	39121600
-------------	----------

# TTC-6P-3-EX-24DC-UT-I - Surge protection device



1064665

<https://www.phoenixcontact.com/us/products/1064665>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a)

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
	Lead(CAS: 7439-92-1)
SCIP	c3b2be70-c68b-4398-9741-16dd497e240e

### EF3.1 Climate Change

CO2e kg	1.803 kg CO2e
---------	---------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)