

# CBMC EG4 24DC/1-8A NO - Electronic circuit breaker



1065730

<https://www.phoenixcontact.com/us/products/1065730>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Multi-channel electronic circuit breaker with electrical isolation for protecting four loads at 24 V DC in the event of overload or short circuit. With electronic locking of the set nominal currents. For installation on DIN rails.

## Your advantages

- Easy device replacement without replanning, thanks to compact design and options for individual adjustments
- Circuits can be adjusted without any tools by means of one single pushable LED button
- System safety is increased during maintenance work thanks to disconnection via electrical isolation
- Safe system operation, thanks to patented monitoring of electrical isolation
- Reliable protection against unintentional adjustment of current values, thanks to electronic locking
- Status LEDs in traffic light colors enable instantaneous determination of operating states



## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1065730       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Product key                          | CLA152        |
| GTIN                                 | 4055626729312 |
| Weight per piece (including packing) | 182.3 g       |
| Weight per piece (excluding packing) | 167 g         |
| Country of origin                    | DE            |

## Technical data

### Notes

#### General

|      |   |
|------|---|
| Note | Repeated hard short circuits can reduce the melting integral of the integrated backup fuse.   |
|      | Always connect the negative pole to terminal IN- to ensure the internal power supply. Return currents from the loads must not be fed back to the power supply via IN- of the circuit breaker. |

### Product properties

|                     |                            |
|---------------------|----------------------------|
| Product type        | Device circuit breakers    |
| Product family      | CBMC                       |
| Type                | DIN rail module, one-piece |
| Number of positions | 1                          |
| No. of channels     | 4                          |

#### Insulation characteristics

|                  |     |
|------------------|-----|
| Protection class | III |
| Pollution degree | 2   |

### Electrical properties

#### General

|                                  |  |
|----------------------------------|--|
| Operating voltage                | 18 V DC ... 30 V DC  |
| Rated voltage                    | 24 V DC  |
| Rated current $I_N$              | max. 32 A (IN+)<br>max. 40 A (per terminal position when bridging additional devices via IN+)  |
| Rated current $I_N$              | 1 / 2 / 3 / 4 / 5 / 6 / 7 / 8 A DC (adjustable per output channel)   |
| Rated current (pre-adjusted)     | 4 A  |
| Rated surge voltage              | 0.5 kV   |
| Tripping method                  | EG (electronic - galvanic disconnection)   |
| Feedback resistance              | max. 35 V DC   |
| Required backup fuse             | Only required if $I_{max}$ of the power supply > the short-circuit switching capacity. Integrated failsafe element.<br>30 A (gG, supplied with linear power supply, $I_{cn} \geq 200$ A) |
| Short-circuit switching capacity | 300 A  |
| Dielectric strength              | max. 35 V DC (Load circuit)  |
| Fuse                             | electronic   |
| Efficiency                       | > 99 %   |
| Closed circuit current $I_0$     | typ. 75 mA   |
| Power dissipation                | typ. 1.8 W (No-load operation)<br>< 7 W (Nominal operation)  |
| Module initialization time       | 1.6 s  |

# CBMC EG4 24DC/1-8A NO - Electronic circuit breaker



1065730

<https://www.phoenixcontact.com/us/products/1065730>

|  |                                      |
|--|--------------------------------------|
| Waiting time after switch off of a channel | 5 s (at overload / short circuit)    |
| Measuring tolerance I                      | ± 15 %                               |
| Temperature derating                       | 25 A DC (at 60 °C)                   |
|  | 28 A DC (at 56 °C)                   |
|  | 32 A DC (at 52 °C)                   |
| MTBF (IEC 61709, SN 29500)                 | 5000000 h (at 25 °C with 21 % load)  |
|  | 2000000 h (at 40°C with 34.25% load) |
|  | 321056 h (at 52°C with 100% load)    |
| Fail-safe element                          | 15 A DC (per output channel)         |
| Contact switching type                     | Relay, N/O contact                   |

## Load circuit

|                         |   |
|-------------------------|---|
| Shutdown time           | ≤ 10 ms (for short circuit > 2.0 x I <sub>N</sub> )                                 |
|                         | 1 s (1.2 ... 2.0 x I <sub>N</sub> )   |
| Undervoltage switch-off | ≤ 17.8 V DC (active)  |
|                         | ≥ 18.8 V DC (inactive)  |
| Overvoltage switch-off  | ≥ 30.5 V DC (active)  |
|                         | ≤ 29.5 V DC (inactive)  |
| Max. capacitive load    | 45000 µF (Depending on the current setting and the short-circuit current available) |
| Switch-on delay         | 0.1 s (per output channel)  |

## Indicator/remote signaling

|                    |                           |
|--------------------|---------------------------|
| Connection name    | Remote indication circuit |
| Switching function | N/O contact               |
| Operating voltage  | 0 V DC ... 30 V DC        |
| Operating current  | 100 mA DC                 |

## Connection data

### Main circuit IN+

|   |  |
|---|--|
| Connection method   | Push-in connection                         |
| Stripping length  | 15 mm                                      |
| Conductor cross-section flexible  | 0.2 mm <sup>2</sup> ... 6 mm <sup>2</sup>  |
| Conductor cross-section rigid   | 0.2 mm <sup>2</sup> ... 10 mm <sup>2</sup> |
| Conductor cross-section AWG   | 24 ... 8                                   |
| Conductor cross-section, flexible, with ferrule, with plastic sleeve    | 0.25 mm <sup>2</sup> ... 4 mm <sup>2</sup> |
| Conductor cross-section, flexible, with ferrule, without plastic sleeve | 0.25 mm <sup>2</sup> ... 6 mm <sup>2</sup> |

### Main circuit IN-

|  |  |
|--|--|
| Connection method  | Push-in connection                           |
| Stripping length   | 10 mm  |
| Conductor cross-section rigid  | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>  |
| Conductor cross-section AWG  | 24 ... 12                                    |
| Conductor cross-section, flexible, with ferrule, with plastic sleeve | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |

# CBMC EG4 24DC/1-8A NO - Electronic circuit breaker



1065730

<https://www.phoenixcontact.com/us/products/1065730>

|   |  |
|---|--|
| Conductor cross-section, flexible, with ferrule, without plastic sleeve | 0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
|---|--|

## Main circuit OUT

|   |  |
|---|--|
| Connection method   | Push-in connection                           |
| Stripping length  | 10 mm  |
| Conductor cross-section rigid   | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>  |
| Conductor cross-section AWG   | 24 ... 12                                    |
| Conductor cross-section, flexible, with ferrule, with plastic sleeve    | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| Conductor cross-section, flexible, with ferrule, without plastic sleeve | 0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |

## Remote indication circuit

|   |  |
|---|--|
| Connection method   | Push-in connection                           |
| Stripping length  | 10 mm  |
| Conductor cross-section rigid   | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>  |
| Conductor cross-section AWG   | 24 ... 12                                    |
| Conductor cross-section, flexible, with ferrule, with plastic sleeve    | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| Conductor cross-section, flexible, with ferrule, without plastic sleeve | 0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |

## Signaling

|                    |  |
|--------------------|--|
| Channel LED off    | off (Channel switched off)   |
| Channel LED yellow | lit (Channel switched on, channel load > 80%)  |
|                    | flashing (Programming mode active)   |
| Channel LED green  | lit (Channel switched on)  |
| Channel LED red    | lit (Channel switched off, relay error, overvoltage or undervoltage active)                      |
|                    | ON temporarily (Channel switched off, 5 s cool-down phase, overload or short-circuit release)    |
|                    | flashing (Channel switched off, ready to be switched back on, overload or short-circuit release) |
|                    | two flashes (Channel switched off, device total current limit 32 A exceeded)                     |

## Dimensions

|                     |                               |
|---------------------|-------------------------------|
| Dimensional drawing |                               |
| Width               | 36 mm                         |
| Height              | 90 mm                         |
| Depth               | 98 mm (incl. DIN rail 7.5 mm) |

## Material specifications

# CBMC EG4 24DC/1-8A NO - Electronic circuit breaker



1065730

<https://www.phoenixcontact.com/us/products/1065730>

|  |                       |
|--|-----------------------|
| Color                                  | light gray (RAL 7035) |
| Material                               | PC                    |
|  | PA 6.6                |
|  | PA 6.3T               |
|  | POM                   |
| Flammability rating according to UL 94 | V-0                   |

## Environmental and real-life conditions

### Ambient conditions

|   |                             |
|---|-----------------------------|
| Degree of protection                    | IP20                        |
| Ambient temperature (operation)         | -25 °C ... 60 °C            |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C            |
| Altitude                                | ≤ 3000 m up to 52 °C (amsl) |
|   | ≤ 4000 m up to 46 °C (amsl) |
| Humidity test                           | 96 h, 95 % RH, 40 °C        |

## Approvals

### Corrosive gas test

|                |                                  |
|----------------|----------------------------------|
| Identification | ISA S71.04.2013 G3 Harsh Group A |
|----------------|----------------------------------|

## Standards and regulations

|                          |   |
|--------------------------|---|
| Standards/specifications | EN 61000-6-2  |
| Note                     | EMC – Immunity for industrial areas   |
| Standards/specifications | EN 61000-6-3  |
| Note                     | EMC – Emission for residential, business and commercial properties and small operations |
| Standards/specifications | EN 60068-2-78   |
| Note                     | Environmental influences – Vibrations (sinusoidal)                                      |
| Standards/specifications | EN 50178  |
| Note                     | Equipping power installations with electronic equipment                                 |

## Mounting

|               |                 |
|---------------|-----------------|
| Mounting type | DIN rail: 35 mm |
|---------------|-----------------|

# CBMC EG4 24DC/1-8A NO - Electronic circuit breaker




1065730

<https://www.phoenixcontact.com/us/products/1065730>

## Drawings

Dimensional drawing

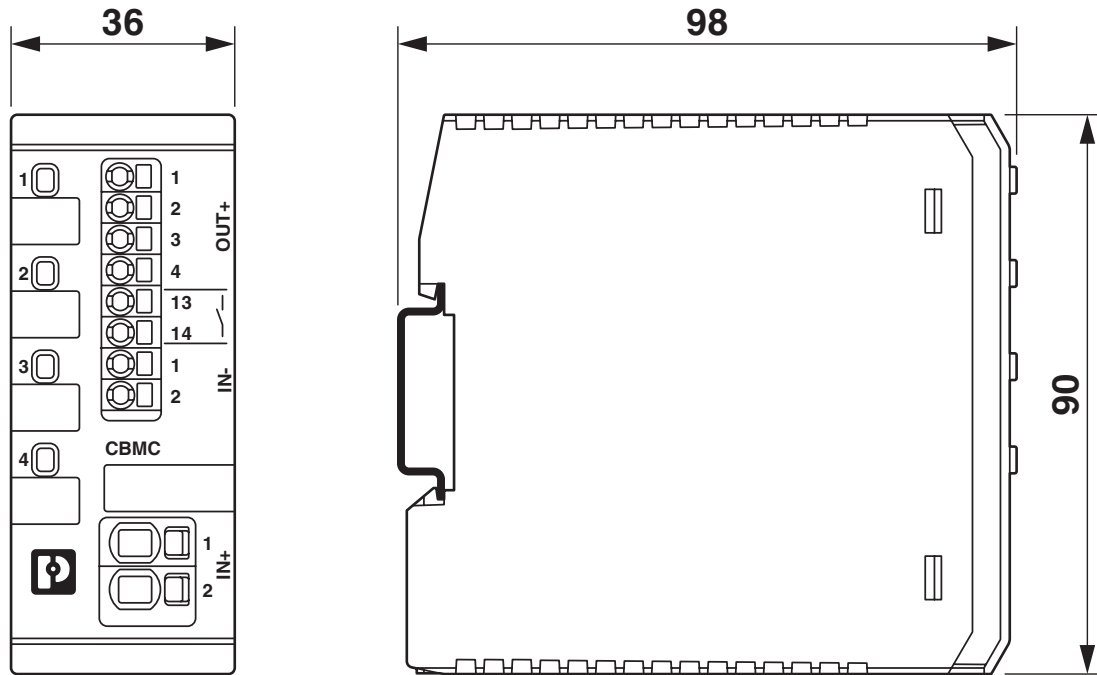


# CBMC EG4 24DC/1-8A NO - Electronic circuit breaker




1065730

<https://www.phoenixcontact.com/us/products/1065730>

Product drawing

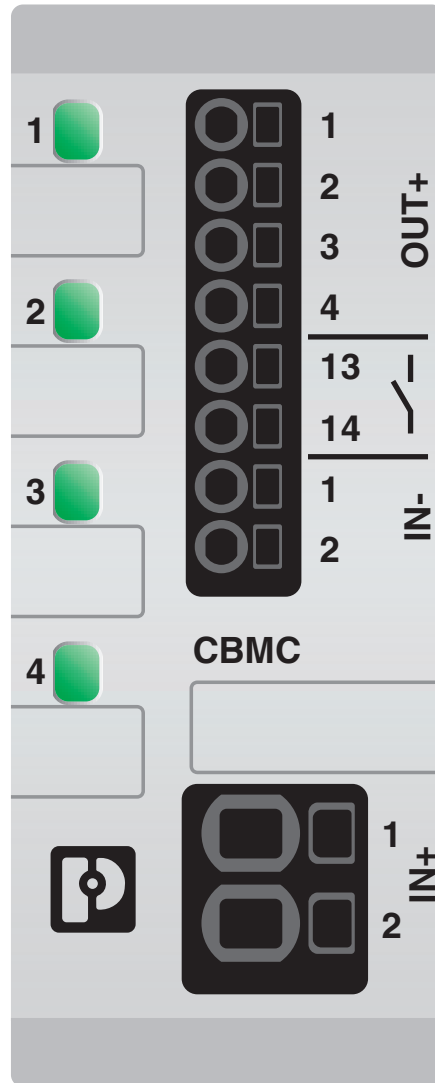

Application drawing

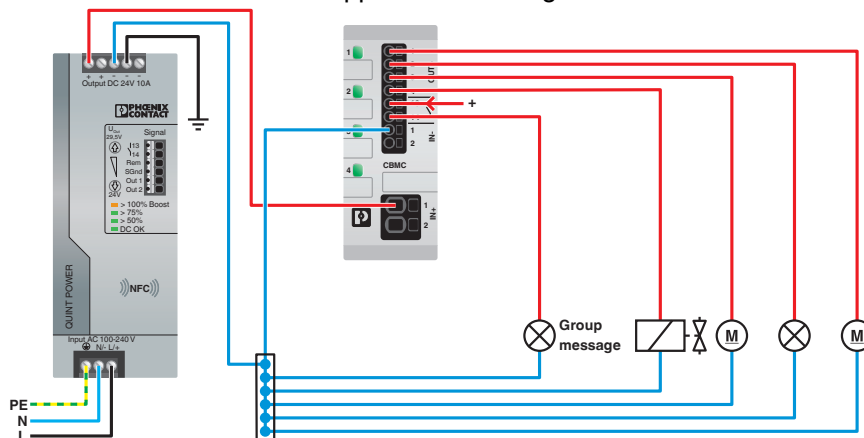


Diagram




Trigger characteristic in the DC range

Diagram

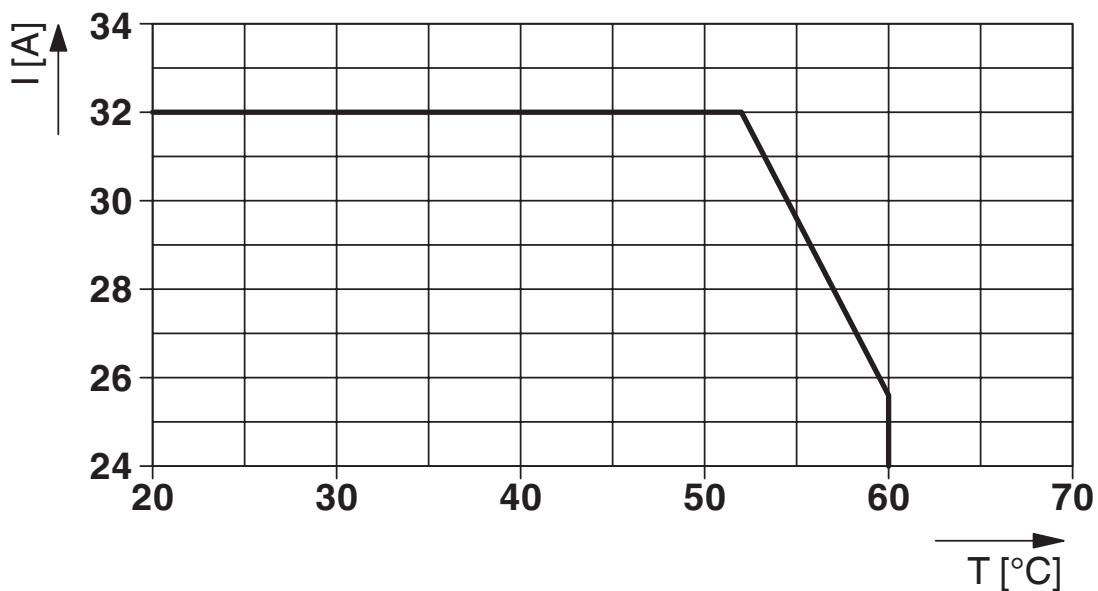

Max. permissible current in relation to the ambient temperature

Block diagram

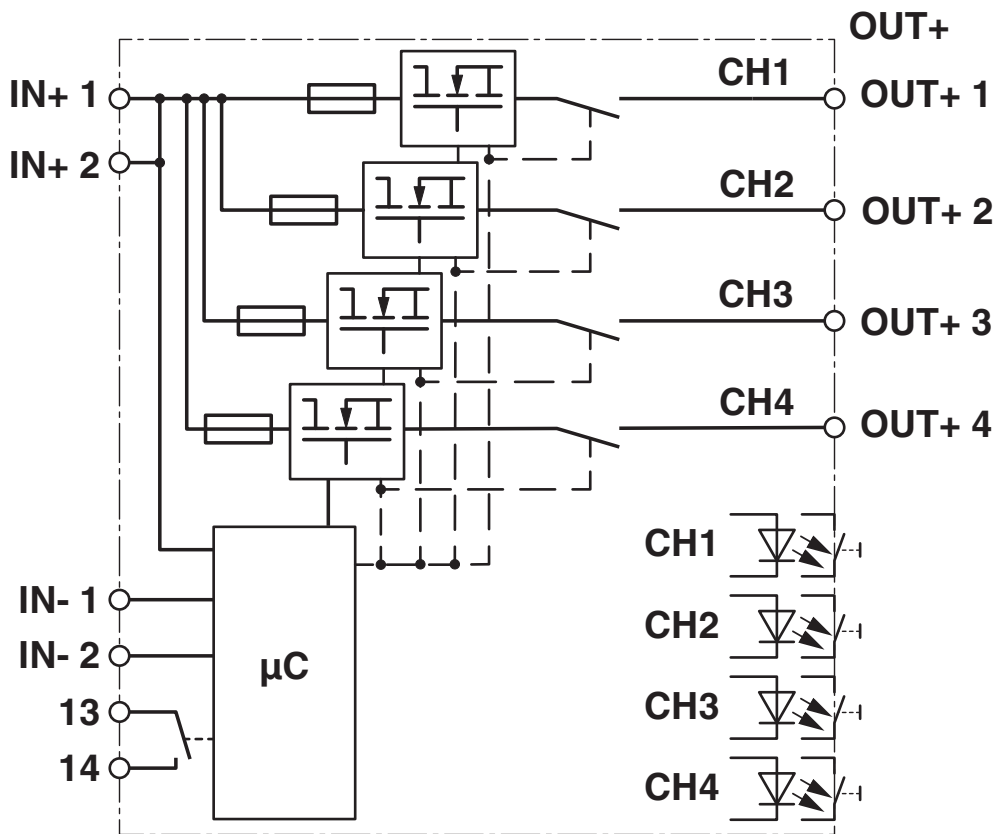

1065730

<https://www.phoenixcontact.com/us/products/1065730>

## Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1065730>



**UL Recognized**

Approval ID: E317172



**UL Listed**

Approval ID: E123528



**cUL Listed**

Approval ID: E123528

# CBMC EG4 24DC/1-8A NO - Electronic circuit breaker



1065730

<https://www.phoenixcontact.com/us/products/1065730>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27140401 |
| ECLASS-15.0 | 27140401 |

### ETIM

|           |          |
|-----------|----------|
| ETIM 10.0 | EC003538 |
|-----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

1065730

<https://www.phoenixcontact.com/us/products/1065730>

## Environmental product compliance

### EU RoHS

|   |              |
|---|--------------|
| Fulfills EU RoHS substance requirements | Yes          |
| Exemption                               | 7(a), 7(c)-I |

### China RoHS

|  |   |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50   |
|  | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |  |
|-------------------------------------|--|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)   |
|                                     | Perfluorobutane sulfonic acid (PFBS) and its salts(CAS: n/a) |
| SCIP                                | da16fb6d-c2a1-4e67-a0bb-e2eaed2383be                         |

### EF3.1 Climate Change

|         |                |
|---------|----------------|
| CO2e kg | 10.637 kg CO2e |
|---------|----------------|

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
 586 Fulling Mill Road  
 Middletown, PA 17057, United States  
 (+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)