

# PSR-PC21-2NO-2NC-24DC-SC - Coupling relay



1086945

<https://www.phoenixcontact.com/us/products/1086945>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Coupling relay for SIL 3 high and low-demand applications, coupled digital output signals to the I/O, 2 independently controllable enabling current paths, 2 confirmation current paths, safe state off applications, test pulse filter, pluggable screw terminal block

## Product description

The safe coupling relay couples digital output signals from failsafe controllers to I/O devices and is used for power adaptation and electrical isolation. The safe coupling relay can be used in high- and low-demand applications. The safe coupling relay safely interrupts circuits.

## Your advantages

- Up to SIL 3 in accordance with IEC 61508, IEC 61511, and IEC 50156
- Approved for Class I, Zone 2 applications
- Force-guided contacts in accordance with EN 50205
- Easy proof test according to IEC 61508 thanks to integrated signal contact
- Low housing width of just 12.5 mm
- Long service life thanks to filtering of controller test pulses
- 2 enabling current paths, 2 confirmation current paths
- Independent control of the relay channels possible

## Commercial data

Item number	1086945
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN01
Product key	DNA182
GTIN	4055626881904
Weight per piece (including packing)	147.09 g
Weight per piece (excluding packing)	115.41 g
Customs tariff number	85364190
Country of origin	DE

# PSR-PC21-2NO-2NC-24DC-SC - Coupling relay



1086945

<https://www.phoenixcontact.com/us/products/1086945>

## Technical data

### Notes

#### Note on application

Note on application	Only for industrial use
---------------------	-------------------------

### Product properties

Product type	Coupling relay
Product family	PSRmini
Application	Safe switch off
	High demand
	Low demand
	Ex
Control	1 and 2 channel
Mechanical service life	10x 10 <sup>6</sup> cycles
Relay type	Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3

### Insulation characteristics

Overvoltage category	III
Degree of pollution	2

### Times

Typ. starting time with U <sub>S</sub>	< 70 ms (when controlled via A1 or A3 at U <sub>S</sub> )
Typical release time	< 30 ms (when controlled via A1 or A3 at U <sub>S</sub> )
Recovery time	500 ms

### Electrical properties

Maximum power dissipation for nominal condition	7.05 W (S1, S2, S3, S4 = ON, 2-channel load, U <sub>B</sub> = 30 V, U <sub>S</sub> = 24 V, I <sub>S</sub> = 2*46 mA, I <sub>L</sub> <sup>2</sup> = 36 A, R <sub>contact</sub> = 0.05 Ω)
Nominal operating mode	100% operating factor
Rated insulation voltage	250 V AC
Rated surge voltage/insulation	Safe isolation, reinforced insulation 6.4 kV from (A1/A2, A3/A4, 21/22, 41/42) to (13/14, 33/34) and between (13/14) and (33/34)
	Basic insulation 4 kV between all current paths and housing
	500 V isolation between (A1/A2, A3/A4) and (21/22, 41/42)

### Supply

Designation	A1/A2, A3/A4
Rated control circuit supply voltage U <sub>S</sub>	19.2 V DC ... 30 V DC
Rated control circuit supply voltage U <sub>S</sub>	24 V DC -20 % / +25 %
Rated control supply current I <sub>S</sub>	typ. 15 mA (per channel (configurable))
	typ. 25 mA (per channel (configurable))
	typ. 40 mA (per channel (configurable))
	typ. 46 mA (per channel (configurable))

# PSR-PC21-2NO-2NC-24DC-SC - Coupling relay



1086945

<https://www.phoenixcontact.com/us/products/1086945>

Power consumption at $U_S$	typ. 360 mW (per channel (configurable))
	typ. 600 mW (per channel (configurable))
	typ. 960 mW (per channel (configurable))
	typ. 1.1 W (per channel (configurable))
Inrush current	typ. 200 mA ( $\Delta t = 10 \mu s$ at $U_S$ , per channel (configurable))
	typ. 300 mA ( $\Delta t = 10 \mu s$ at $U_S$ , per channel (configurable))
Filter time	2 ms (in the event of voltage dips at $U_S$ )
Protective circuit	Serial protection against polarity reversal; 38.6 V suppressor diode

## Output data

Relay: Enabling current paths (13/14, 33/34)

Output description	2 N/O contacts parallel, without delay, safety-related, floating
Number of outputs	2
Contact switching type	2 enabling current paths
Contact material	AgSnO <sub>2</sub>
Switching voltage	min. 12 V DC
	max. 250 V AC/DC
Switching power	min. 60 mW
Inrush current	min. 3 mA
	max. 6 A
Switching capacity	4 A (24 V (DC13))
	4 A (250 V (AC15), low demand)
	2 A (250 V (AC15), high demand)
Limiting continuous current	6 A (High demand)
	4 A (Low demand)
Sq. Total current	72 A <sup>2</sup> (High-demand, observe derating)
	32 A <sup>2</sup> (Low-demand, observe derating)
Switching frequency	max. 0.1 Hz
Mechanical service life	10x 10 <sup>6</sup> cycles
Output fuse	6 A gL/gG
	4 A gL/gG (for low-demand applications)

Relay: Confirmation current paths (21/22, 41/42)

Output description	2 N/C contacts parallel, without delay, safety-related, floating
Number of outputs	2
Contact switching type	2 confirmation current paths
Contact material	AgCuNi, + Au
Switching voltage	min. 5 V DC
	max. 30 V DC
Switching power	min. 20 mW
Inrush current	min. 1 mA
	max. 100 mA
Limiting continuous current	100 mA

# PSR-PC21-2NO-2NC-24DC-SC - Coupling relay



1086945

<https://www.phoenixcontact.com/us/products/1086945>

Mechanical service life	10x 10 <sup>6</sup> cycles
Output fuse	150 mA Fast-blow

## Connection data

### Conductor connection

Connection method	Screw connection
Conductor cross-section rigid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section AWG	24 ... 12
Stripping length	7 mm
Screw thread	M3
Tightening torque	0.6 Nm

## Signaling

Status display	2 x LED (green)
----------------	-----------------

## Dimensions

Width	12.5 mm
Height	112.2 mm
Depth	114.5 mm

## Material specifications

Color (Housing)	yellow (RAL 1018)
Housing material	PA

## Characteristics

### Safety data

Stop category (EN 60204-1)	0
----------------------------	---

### Safety data: EN ISO 13849

Performance level (PL)	e
------------------------	---

### Safety data: EN 50156-2

Safety Integrity Level (SIL)	3 (Reference IEC 61508)
------------------------------	-------------------------

### Safety data: IEC 61508 – High-demand for 2-channel wiring (1oo2 structure)

Safety Integrity Level (SIL)	3
------------------------------	---

### Safety data: IEC 61508 – High-demand for 1-channel wiring (1oo1 structure)

Safety Integrity Level (SIL)	2
------------------------------	---

### Safety data: IEC 61508 – Low-demand for 2-channel wiring (1oo2 structure)

Safety Integrity Level (SIL)	3
------------------------------	---

### Safety data: IEC 61508 – Low-demand for 1-channel wiring (1oo1 structure)

Safety Integrity Level (SIL)	2
------------------------------	---

# PSR-PC21-2NO-2NC-24DC-SC - Coupling relay



1086945

<https://www.phoenixcontact.com/us/products/1086945>

Safety data: EN IEC 62061

Safety Integrity Level (SIL)	3
------------------------------	---

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Min. degree of protection of inst. location	IP54
Ambient temperature (operation)	-40 °C ... 70 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Maximum altitude	≤ 2000 m (Above sea level)
Max. permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Max. permissible relative humidity (operation)	75 % (on average, 85% infrequently, non-condensing)
Shock	15g
Vibration (operation)	10 Hz ... 150 Hz, 2g

## Approvals

### ATEX

Identification	⊕ II 3G Ex ec nC IIC T4 Gc
Certificate	DEMKO 19 ATEX 2240X

### IECEX

Identification	Ex ec nC IIC T4 Gc
Certificate	IECEX ULD 19.0023X

### UL, USA/Canada

Identification	cULus
Certificate	E140324

### UL Ex, USA / Canada

Identification	Class I, Zone 2, AEx ec nC IIC T4 / Ex ec nC IIC Gc T4 X Class I, Div. 2, Groups A, B, C, D, T4
Certificate	E360692

### CE

Identification	CE-compliant
----------------	--------------

### Environmental simulation test

Identification	G3
Certificate	ISA-S71.04

### CCC / China-Ex

Identification	Ex ec nC IIC T4 Gc
Certificate	2022122304115696

## Mounting

Mounting type	DIN rail mounting
---------------	-------------------

# PSR-PC21-2NO-2NC-24DC-SC - Coupling relay



1086945

<https://www.phoenixcontact.com/us/products/1086945>

Assembly note	See derating curve
Mounting position	vertical or horizontal


# PSR-PC21-2NO-2NC-24DC-SC - Coupling relay

1086945

<https://www.phoenixcontact.com/us/products/1086945>

## Drawings

Circuit diagram

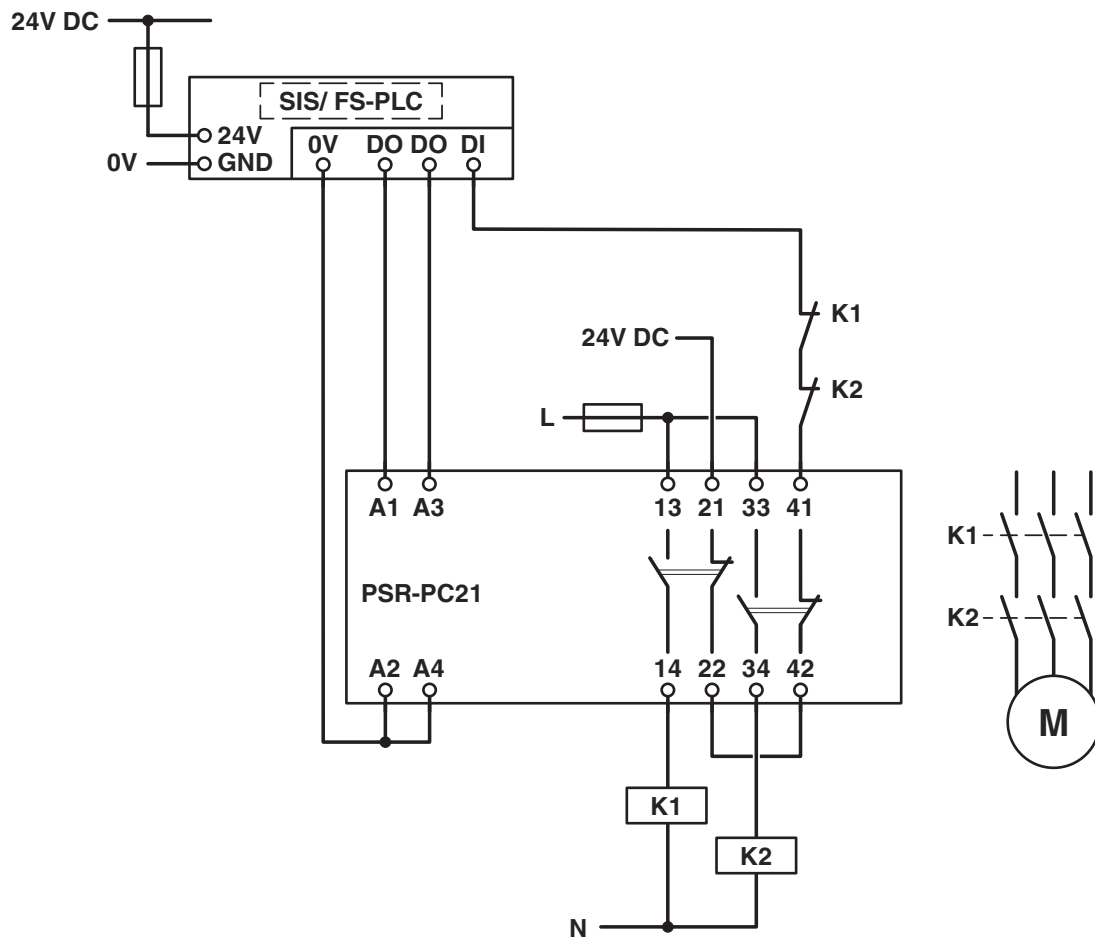

High-demand application with failsafe controller


# PSR-PC21-2NO-2NC-24DC-SC - Coupling relay



1086945


<https://www.phoenixcontact.com/us/products/1086945>

Circuit diagram

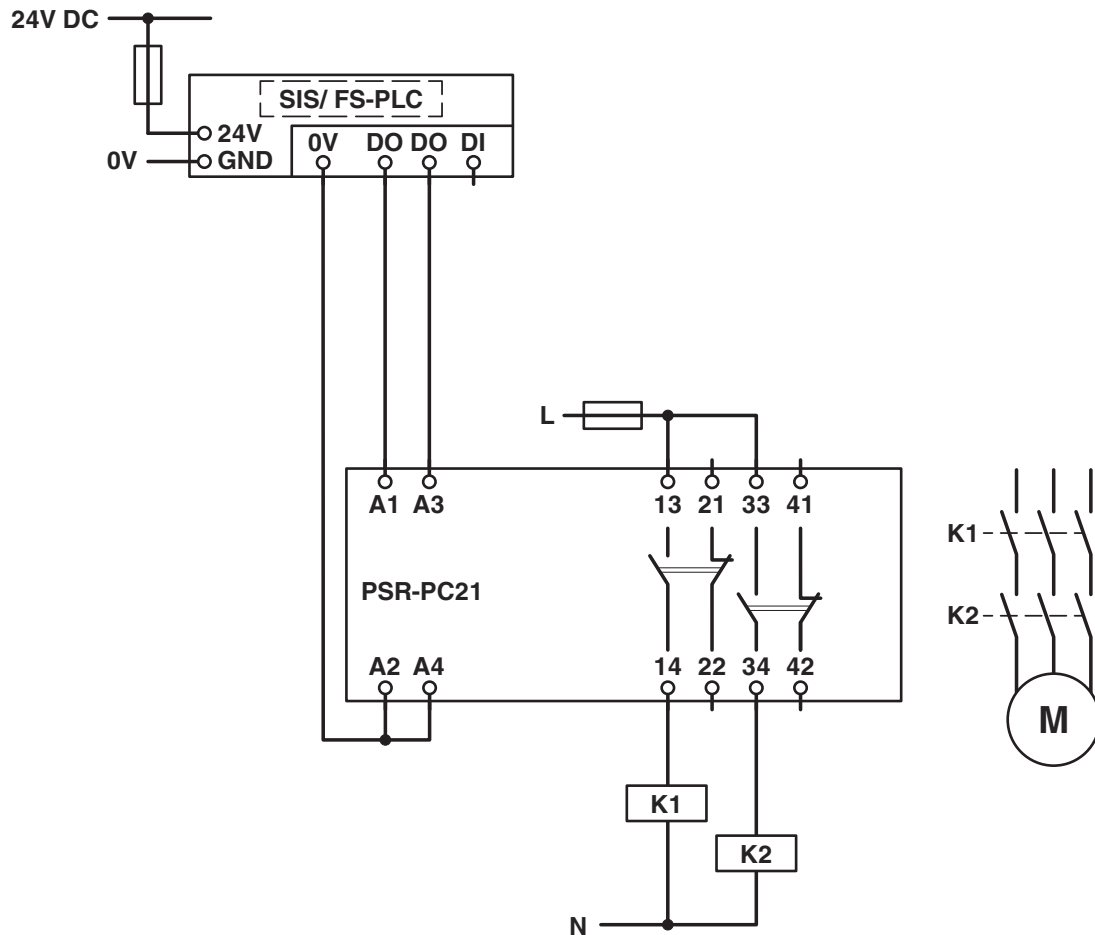

High-demand application with failsafe controller

Block diagram

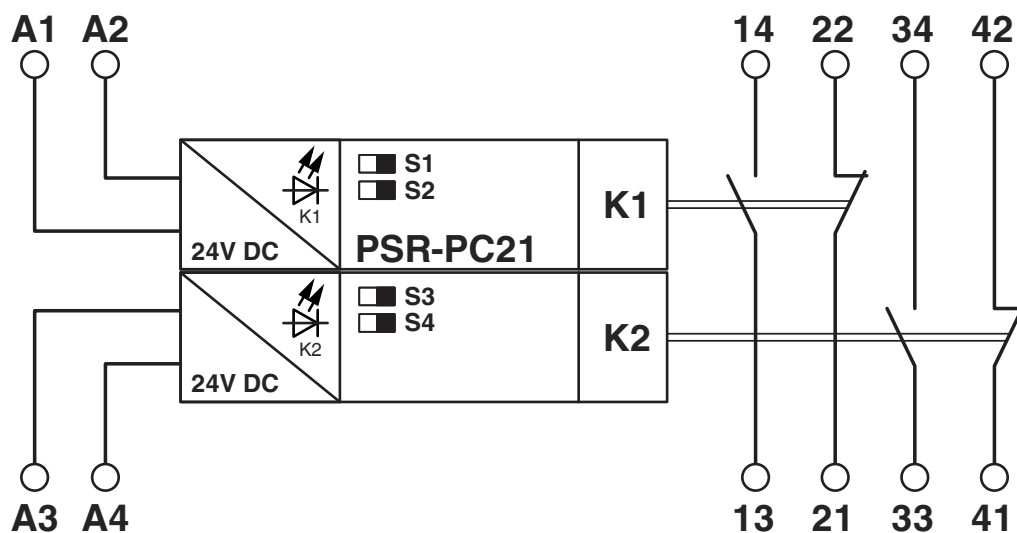

Block diagram

# PSR-PC21-2NO-2NC-24DC-SC - Coupling relay



1086945

<https://www.phoenixcontact.com/us/products/1086945>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1086945>



**cULus Listed**

Approval ID: E140324



**Functional Safety**

Approval ID: 968/FSP 1955.02/24



**IECEX**

Approval ID: IECEX ULD 19.0023X



**ATEX**

Approval ID: DEMKO 19 ATEX 2240X



**cULus Listed**

Approval ID: E360692



**CCC**

Approval ID: 2022122304115696

# PSR-PC21-2NO-2NC-24DC-SC - Coupling relay



1086945

<https://www.phoenixcontact.com/us/products/1086945>

## Classifications

### ECLASS

ECLASS-13.0	27371819
ECLASS-15.0	27371819

### ETIM

ETIM 10.0	EC001449
-----------	----------

### UNSPSC

UNSPSC 21.0	39122200
-------------	----------

# PSR-PC21-2NO-2NC-24DC-SC - Coupling relay



1086945

<https://www.phoenixcontact.com/us/products/1086945>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	05af3c71-0245-4bd3-81a3-3f65c2b5f6f0

### EF3.1 Climate Change

CO2e kg	13.924 kg CO2e
---------	----------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)