

# FA MCR-EX-HT-1TS-I-OLP - Head-mounted transducer



1145217

<https://www.phoenixcontact.com/us/products/1145217>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Ex i-Output loop-powered head transmitter for transmitting RTD and TC sensor signals, as well as from resistance and voltage sensors via 4 mA ... 20 mA. HART, Standard configuration, Screw connection

## Commercial data

Item number	1145217
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	NULL
Product key	DK1242
GTIN	4063151134983
Weight per piece (including packing)	186 g
Weight per piece (excluding packing)	70 g
Customs tariff number	85437090
Country of origin	DE

# FA MCR-EX-HT-1TS-I-OLP - Head-mounted transducer



1145217

<https://www.phoenixcontact.com/us/products/1145217>

## Technical data

### Product properties

Product type	Temperature transmitter
Product family	Field Analog
No. of channels	1
Configuration	Software
	HART

### Insulation characteristics

Overvoltage category	II
Pollution degree	2

### System properties

#### Functionality

Configuration	Software
	HART

### Electrical properties

Electrical isolation between input and output	yes
Step response (0–99%)	1 s (TC)
	1 s (RTD)

#### Electrical isolation Input/output

Test voltage	2 kV AC (50 Hz, 60 s)
--------------	-----------------------

#### Supply

Supply voltage range	loop-powered, no external supply necessary
	10 V DC ... 30 V DC (Ex)

### Input data

#### Measurement

Number of inputs	1
Input voltage range	-20 mV ... 100 mV (Minimum measuring span: 5 mV)
Sensor types (RTD) that can be used	Pt, Ni, Cu sensors: 2, 3, 4-wire
Sensor types that can be used (TC)	A, B, C, D, E, J, K, L, N, R, S, T, U
Temperature measuring range	-250 °C ... 2500 °C (Range depending on the sensor type)
Temperature measuring range	≥ 10 K (RTD)
	≥ 50 K (TC)
Linear resistance measuring range	10 Ω ... 2000 Ω (Minimum measuring span: 10 Ω)

### Output data

#### Signal: Current

Current output signal	4 mA ... 20 mA (HART)
-----------------------	-----------------------

# FA MCR-EX-HT-1TS-I-OLP - Head-mounted transducer



1145217

<https://www.phoenixcontact.com/us/products/1145217>

	20 mA ... 4 mA (HART)
Max. current output signal	23 mA
Load	$(U_L - 10 \text{ V}) / 0.023 \text{ A}$
HART coding	FSK $\pm 0.5 \text{ mA}$
HART version	7
Transmission speed	1200 Baud
Mains frequency filter	50/60 Hz
Communication resistance	$\geq 250 \Omega$
Switch-on delay	$\approx \phi \text{ s (HART)}$ $\approx \phi \text{ s (Measured value)}$

## Connection data

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross-section rigid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section AWG	24 ... 14
Tightening torque	0.5 Nm

## Ex data

Ex installation (EPL)	Gb Div. 1
Ex i circuits (EPL)	Ga Div. 1

## Interfaces

### Data communication (bypass)

Protocols supported	HART
---------------------	------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP00 (upon installation in field housing IP66/67, NEMA 4X)
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-50 °C ... 100 °C
Altitude	$\leq 4000 \text{ m (Above sea level)}$
Climatic class	C1
Permissible humidity (operation)	5 % ... 95 % (condensation permitted)

## Approvals

### CE

Certificate	CE-compliant
-------------	--------------

### ATEX

# FA MCR-EX-HT-1TS-I-OLP - Head-mounted transducer



1145217

<https://www.phoenixcontact.com/us/products/1145217>

Identification	Ⓜ II 1G Ex ia IIC T6...T4 Ga
Certificate	EPS 20 ATEX 1 166 X

## IECEX

Identification	II 1G Ex ia IIC T6...T4 Ga
Certificate	IECEX EPS 20.0060X

## UKCA Ex (UKEX)

Certificate	CML 21UKEX21009X
-------------	------------------

## CSA

Identification	IS for Class I, Div. 1, Groups A, B, C, D; T6...T4
	Ex ia IIC T6...T4 Ga

## Mounting

Mounting type	Installation
	DIN rail mounting
Assembly note	Installation in connection head according to DIN 43729 form B


# FA MCR-EX-HT-1TS-I-OLP - Head-mounted transducer

1145217

<https://www.phoenixcontact.com/us/products/1145217>

## Drawings

Block diagram

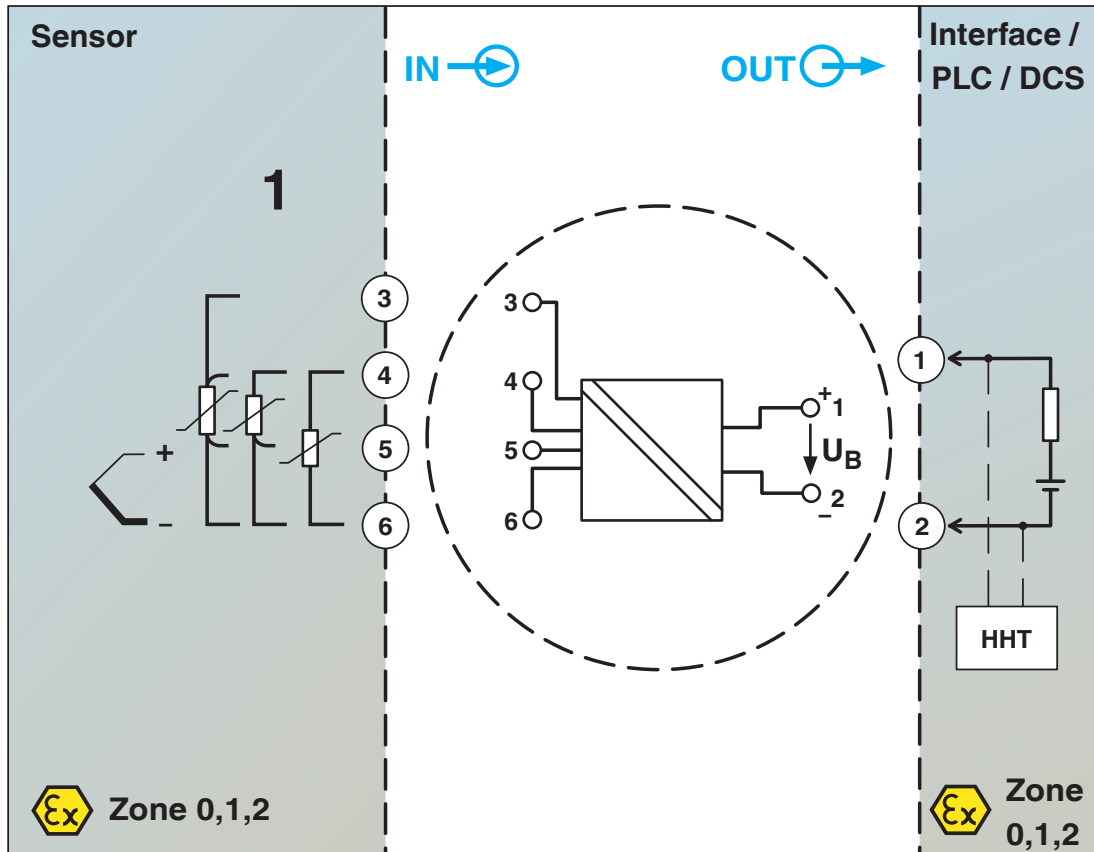

# FA MCR-EX-HT-1TS-I-OLP - Head-mounted transducer



1145217

<https://www.phoenixcontact.com/us/products/1145217>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1145217>



**IECEx**

Approval ID: IECEx\_EPS\_20.0060X



**CSA**

Approval ID: 80070110



**ATEX**

Approval ID: EPS 20 ATEX 1 166 X



**CSAus**

Approval ID: 80070110

# FA MCR-EX-HT-1TS-I-OLP - Head-mounted transducer



1145217

<https://www.phoenixcontact.com/us/products/1145217>

## Classifications

### ECLASS

ECLASS-13.0	27210129
ECLASS-15.0	27210129

### ETIM

ETIM 10.0	EC002919
-----------	----------

### UNSPSC

UNSPSC 21.0	41112100
-------------	----------

# FA MCR-EX-HT-1TS-I-OLP - Head-mounted transducer



1145217

<https://www.phoenixcontact.com/us/products/1145217>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
-------------------------------------	----------------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)