

SACCBP-FSD-4P-M16/1,2-93E/MSD - Device connector rear mounting



1191735

<https://www.phoenixcontact.com/us/products/1191735>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, 4-position, Socket, straight, M12, D-coding, on free cable end, Cable connection, cable length: 1.2 m, this item is expected to be lead-free from Q1 2027 in accordance with RoHS II without exception 6c (Pb < 0.1%), a lead-free alternative is possible on request in advance

Commercial data

Item number	1191735
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB25
Product key	ABQDGI
GTIN	4063151243401
Weight per piece (including packing)	88.2 g
Weight per piece (excluding packing)	82.789 g
Customs tariff number	85444290
Country of origin	DE

SACCBP-FSD-4P-M16/1,2-93E/MSD - Device connector rear mounting



1191735

<https://www.phoenixcontact.com/us/products/1191735>

Technical data

Notes

Order information:	Lock nut is included in the scope of delivery
--------------------	---

Product properties

Product type	Data cable preassembled
Application	Data Signal
Number of positions	4
No. of cable outlets	1
Coding	D
Thread type	M12

Electrical properties

Nominal voltage U_N	48 V AC 60 V DC
Nominal current I_N	Plug/socket in accordance with IEC 61076-2-101, cable technical data is to be observed
Transmission medium	Copper

Connection data

Connection technology	
Connection method	Cable connection

Conductor connection	
Contact connection type	Socket
Connection method	Cable connection

Connector

Connection 1	
Head design	Socket
Head cable outlet	straight
Head thread type	M12
Coding	D

Connection 2	
Head design	free cable end

Cable/line


Cable length	1.2 m
--------------	-------

Ethernet flexible CAT5, 2-pair [93E]

SACCBP-FSD-4P-M16/1,2-93E/MSD - Device connector rear mounting

1191735

<https://www.phoenixcontact.com/us/products/1191735>

Dimensional drawing	
Cable weight	42 kg/km
UL AWM Style	20963 (80°C/30 V)
Wiring standards/regulations	Electrical requirements EN 50288-2-2
Number of positions	4
Shielded	yes
Cable type	Ethernet flexible CAT5, 2-pair [93E]
Conductor structure	2x2xAWG26/7, SF/UTP
Signal runtime	5.3 ns/m
Conductor structure signal line	7x 0.16 mm
AWG signal line	26
Conductor cross-section	2x 2x 0.14 mm ²
Wire diameter incl. insulation	0.98 mm
External cable diameter	6.40 mm ±0.2 mm
Outer sheath, material	PUR
External sheath, color	water blue RAL 5021
Conductor material	Bare Cu litz wires
Material wire insulation	Foamed PE
Single wire, color	white/orange-orange, white/green-green
Thickness, outer sheath	1.20 mm
Twisted pairs	2 cores to the pair
Overall twist	Two pairs with two fillers to the core
Optical shield covering	70 %
Insulation resistance	≥ 500 MΩ*km
Coupling resistance	≤ 100.00 mΩ/m (at 10 MHz)
Loop resistance	≤ 290.00 Ω/km
Wave impedance	100 Ω ±5 Ω (at 100 MHz)
Cable capacity	approx. 45 nF/km (at 1 kHz)
Nominal voltage, cable	≤ 100 V (Peak value, not for high-power applications)
Test voltage Core/Core	700 V (50 Hz, 1 min.)
Test voltage Core/Shield	700.00 V (50 Hz, 1 min.)
Current carrying capacity of cable	2.00 A (according to DIN VDE 0891-1)
Minimum bending radius, fixed installation	4 x D
Minimum bending radius, flexible installation	8 x D
Smallest bending radius, fixed installation	26 mm

SACCBP-FSD-4P-M16/1,2-93E/MSD - Device connector rear mounting



1191735

<https://www.phoenixcontact.com/us/products/1191735>

Smallest bending radius, movable installation	52 mm
Tensile strength	≤ 80 N
Near end crosstalk attenuation (NEXT)	65.3 dB (with 1 MHz)
	56.3 dB (at 4 MHz)
	50.3 dB (at 10 MHz)
	47.2 dB (at 16 MHz)
	45.8 dB (at 20 MHz)
	42.9 dB (at 31.25 MHz)
	38.4 dB (at 62.5 MHz)
	35.3 dB (at 100 MHz)
Power-summated near end crosstalk attenuation (PSNEXT)	62.3 dB (with 1 MHz)
	53.3 dB (at 4 MHz)
	47.3 dB (at 10 MHz)
	44.2 dB (at 16 MHz)
	42.8 dB (at 20 MHz)
	39.9 dB (at 31.25 MHz)
	35.4 dB (at 62.5 MHz)
	32.3 dB (at 100 MHz)
Return attenuation (RL)	23 dB (at 4 MHz)
	24.1 dB (at 8 MHz)
	25 dB (at 10 MHz)
	25 dB (at 16 MHz)
	25 dB (at 20 MHz)
	23.6 dB (at 31.25 MHz)
	21.5 dB (at 62.5 MHz)
	20.1 dB (at 100 MHz)
Shield attenuation	3.2 dB (with 1 MHz)
	6 dB (at 4 MHz)
	9.5 dB (at 10 MHz)
	12.1 dB (at 16 MHz)
	13.6 dB (at 20 MHz)
	17.1 dB (at 31.25 MHz)
	24.8 dB (at 62.5 MHz)
	32 dB (at 100 MHz)
Halogen-free	according to IEC 60754-1
Flame resistance	according to IEC 60332-1-2
	in acc. to UL VW1
	in accordance with UN ECE-R 118.03
Resistance to oil	in accordance with EN 60811-2-1
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation)
	-20 °C ... 80 °C (Cable, flexible installation)
Ambient temperature (installation)	-20 °C ... 80 °C

SACCBP-FSD-4P-M16/1,2-93E/MSD - Device connector rear mounting



1191735

<https://www.phoenixcontact.com/us/products/1191735>

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
UL Type Rating	Type 4 (indoor use only)


SACCBP-FSD-4P-M16/1,2-93E/MSD - Device connector rear mounting

1191735

<https://www.phoenixcontact.com/us/products/1191735>

Drawings

Schematic diagram

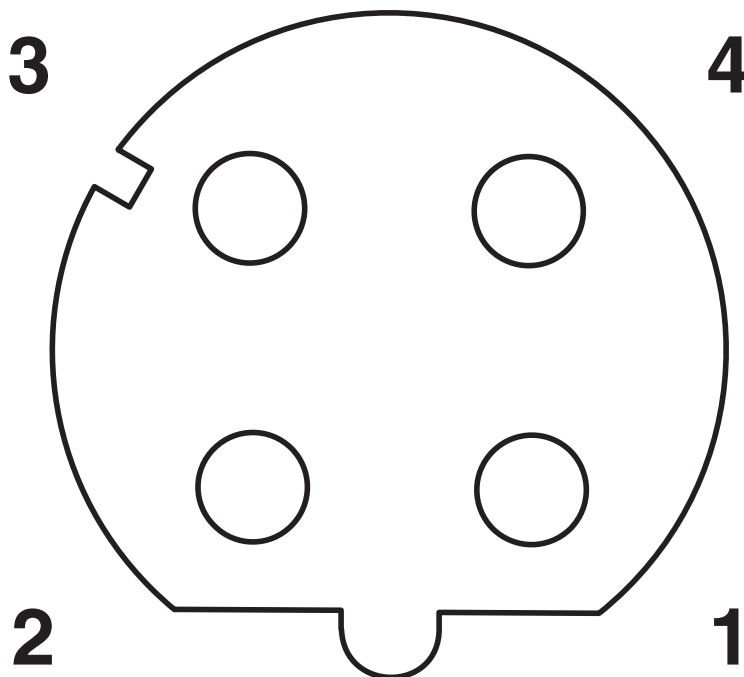

Pin assignment M12 socket, 4-pos., D-coded, female side

SACCBP-FSD-4P-M16/1,2-93E/MSD - Device connector rear mounting





1191735

<https://www.phoenixcontact.com/us/products/1191735>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1191735>

 cUL Recognized Approval ID: E221474-20220907				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
	30 V	1.5 A	26	-

 UL Recognized Approval ID: E221474-20220907				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
	30 V	1.5 A	26	-

SACCBP-FSD-4P-M16/1,2-93E/MSD - Device connector rear mounting



1191735

<https://www.phoenixcontact.com/us/products/1191735>

Classifications

ECLASS

ECLASS-13.0	27440103
ECLASS-15.0	27440103

ETIM

ETIM 10.0	EC003570
-----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

SACCBP-FSD-4P-M16/1,2-93E/MSD - Device connector rear mounting



1191735

<https://www.phoenixcontact.com/us/products/1191735>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50 An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
--	--

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	b3e35827-9ad3-4cf7-b26a-96b5b180d1a5

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com