

# SACC-DSI-MS-4P-M12/0,07 SHX - Device connector rear mounting



1238673

<https://www.phoenixcontact.com/us/products/1238673>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, 4-position, shielded, Pin, straight, M12, A-coding, on free cable end, Individual wires, cable length: 0.07 m, 0.34 mm<sup>2</sup>, potted, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

## Commercial data

Item number	1238673
Packing unit	1 pc
Minimum order quantity	100 pc
Product key	ABQCGA
GTIN	4063151387730
Weight per piece (including packing)	11.5 g
Weight per piece (excluding packing)	9.433 g
Country of origin	DE

# SACC-DSI-MS-4P-M12/0,07 SHX - Device connector rear mounting



1238673

<https://www.phoenixcontact.com/us/products/1238673>

## Technical data

### Notes

Order information:	Lock nut is included in the scope of delivery
General	Contact connection method: Crimp connection
Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.

### Safety note

Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.
	<ul style="list-style-type: none"> <li>• WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.</li> </ul>
	<ul style="list-style-type: none"> <li>• WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.</li> </ul>
	<ul style="list-style-type: none"> <li>• The products are suitable for applications in plant, controller, and electrical device engineering.</li> </ul>
	<ul style="list-style-type: none"> <li>• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.</li> </ul>
	<ul style="list-style-type: none"> <li>• Assembled products may not be manipulated or improperly opened.</li> </ul>
	<ul style="list-style-type: none"> <li>• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a>).</li> </ul>
	<ul style="list-style-type: none"> <li>• When using the product in direct connection with third-party manufacturers, the user is responsible.</li> </ul>
	<ul style="list-style-type: none"> <li>• For operating voltages &gt; 50 V AC, conductive connector housings must be grounded</li> </ul>
	<ul style="list-style-type: none"> <li>• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.</li> </ul>
	<ul style="list-style-type: none"> <li>• Observe the corresponding technical data. You will find information:                             <ul style="list-style-type: none"> <li>o On the product</li> <li>o On the packing label</li> <li>o In the supplied documentation</li> <li>o Online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a> under the product</li> </ul> </li> </ul>
	<ul style="list-style-type: none"> <li>• Only use tools recommended by Phoenix Contact</li> </ul>
	<ul style="list-style-type: none"> <li>• Use a protective cap to protect connectors that are not in use.</li> </ul>

# SACC-DSI-MS-4P-M12/0,07 SHX - Device connector rear mounting



1238673

<https://www.phoenixcontact.com/us/products/1238673>

	The suitable accessories are available online in the accessory section of the product at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a>
	<ul style="list-style-type: none"><li>• Ensure that the protective or functional ground has been properly connected.</li><li>• VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector</li><li>• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).</li></ul>

## Mounting

Mounting type	Rear mounting (M12 x 1)
---------------	-------------------------

## Product properties

Product type	Circular connectors (device side)
Application	Signal
Number of positions	4
Shielded	yes
Coding	A
Thread type	M12

## Insulation characteristics

Overvoltage category	II
Degree of pollution	3

## Material specifications

Material Molding compound	PUR (potted)
---------------------------	--------------

## Electrical properties

Rated surge voltage	2.5 kV AC
Nominal voltage $U_N$	250 V
Nominal current $I_N$	4 A

## Connection data

### Conductor connection

Connection method	Individual wires
Contact connection type	Pin
Conductor cross-section	0.34 mm <sup>2</sup>

## Connector

### Connection 1

Head design	Pin
Head cable outlet	straight

# SACC-DSI-MS-4P-M12/0,07 SHX - Device connector rear mounting



1238673

<https://www.phoenixcontact.com/us/products/1238673>

Head thread type	M12
Coding	A

## Connection 2

Head design	free cable end
-------------	----------------

## Cable/line

Cable length	0.07 m
Cable cross section	0.34 mm <sup>2</sup>

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP67 (When plugged in)
	IP65 (When plugged in)
	IP65/IP67
Ambient temperature (operation)	-25 °C ... 85 °C
UL Type Rating	Type 4 (indoor use only)

## Standards and regulations

Standards/specifications	according to IEC 61076-2-101
--------------------------	------------------------------


# SACC-DSI-MS-4P-M12/0,07 SHX - Device connector rear mounting

1238673

<https://www.phoenixcontact.com/us/products/1238673>

## Drawings

Schematic diagram

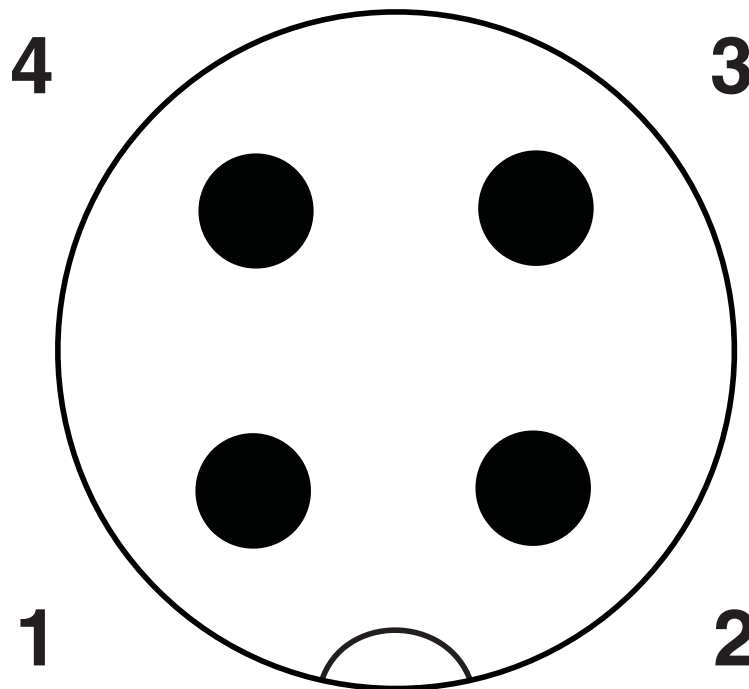

Pin assignment M12 plug, 4-pos., A-coded, view plug side

# SACC-DSI-MS-4P-M12/0,07 SHX - Device connector rear mounting



1238673

<https://www.phoenixcontact.com/us/products/1238673>

## Classifications

### ECLASS

ECLASS-13.0

27440103

### ETIM

ETIM 9.0

EC003570

# SACC-DSI-MS-4P-M12/0,07 SHX - Device connector rear mounting



1238673

<https://www.phoenixcontact.com/us/products/1238673>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)