

SACC-DSI-M12MSL-4CON-M16XL/0,2X - Device connector rear mounting



1239519

<https://www.phoenixcontact.com/us/products/1239519>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, Power, 4-position, Pin, straight, M12-Standard, L-coding, on free cable end, Individual wires, cable length: 0.2 m, 2.50 mm², PEX litz wire, potted, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

Your advantages

- For compact devices: transmit high power in a confined space
- Easy-to-install, optimized XL housing contour with wrench size 19
- Mechanical tightening limitation for long-term-stable gasket
- Preassembled with litz wires for immediate use
- Customer-specific assemblies and litz wire lengths available
- Sealed on the litz wire side for optimum leak-tightness
- For high transmission safety: shield connection to the housing with optional EMC nut

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1239519 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | AB24 |
| Product key | ABQCGB |
| GTIN | 4063151393236 |
| Weight per piece (including packing) | 44.2 g |
| Weight per piece (excluding packing) | 41.506 g |
| Customs tariff number | 85444290 |
| Country of origin | DE |

SACC-DSI-M12MSL-4CON-M16XL/0,2X - Device connector rear mounting



1239519

<https://www.phoenixcontact.com/us/products/1239519>

Technical data

Notes

| | |
|--------------------|--|
| Notes on operation | The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration. |
| Order information: | Lock nut is included in the scope of delivery |

Mounting

| | |
|-------------------|---|
| Mounting type | Rear mounting (M16 x 1.5, XL version, with flat nut, tightening limitation) |
| Tightening torque | 1.5 Nm ... 2 Nm |

Product properties

| | |
|-----------------------|-----------------------------------|
| Product type | Circular connectors (device side) |
| Application | Power |
| Sensor type | Power |
| Number of positions | 4 |
| No. of cable outlets | 1 |
| No. of power contacts | 4 |
| Shielded | no |
| Coding | L |
| Thread type | M12 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Material specifications

| | |
|--|--------------------------|
| Material Housing | GD-Zn |
| Material Housing surface | Ni |
| Material Molding compound | PUR (potted) |
| Flammability rating according to UL 94 | V0 |
| Seal material | FKM |
| Contact material | CuZn |
| Contact surface material | Au |
| Contact carrier material | PA |
| Conductor material | Tin-plated Cu litz wires |

Electrical properties

| | |
|---------------------|--------|
| Rated surge voltage | 1.5 kV |
|---------------------|--------|

SACC-DSI-M12MSL-4CON-M16XL/0,2X - Device connector rear mounting



1239519

<https://www.phoenixcontact.com/us/products/1239519>

| | |
|-----------------------|--------------|
| Rated surge voltage | 1.5 kV AC/DC |
| Nominal voltage U_N | 63 V DC |
| Nominal current I_N | 16 A |
| Test voltage | 1.5 kV |

Connection data

Conductor connection

| | |
|-------------------------|---------------------|
| Connection method | Individual wires |
| Contact connection type | Pin |
| Conductor cross-section | 2.5 mm ² |
| Tightening torque | 1.5 Nm ... 2 Nm |

Connector

Connection 1

| | |
|-------------------|----------|
| Head design | Pin |
| Head cable outlet | straight |
| Head thread type | M12 |
| Head locking type | Standard |
| Coding | L |

Connection 2

| | |
|-------------|----------------|
| Head design | free cable end |
|-------------|----------------|

Cable/line

| | |
|---------------------------------|--|
| Cable length | 0.2 m |
| Cable type | PEX litz wire |
| Signal type/category | Power |
| Single wire, color | brown 1, white 2, blue 3, black 4 |
| Cable cross section | 2.5 mm ² |
| Conductor material | Tin-plated Cu litz wires |
| AWG signal line | 14 |
| Material wire insulation | PE-X |
| Halogen-free | according to IEC 60754-1 |
| Flame resistance | in acc. with UL FT-2 |
| Ambient temperature (operation) | -40 °C ... 85 °C (without mechanical actuation) |
| | -40 °C ... 85 °C (without mechanical actuation) |
| | -25 °C ... 105 °C (Cable, flexible installation) |

Environmental and real-life conditions

Ambient conditions

| | |
|----------------------|------|
| Degree of protection | IP65 |
| | IP67 |

SACC-DSI-M12MSL-4CON-M16XL/0,2X - Device connector rear mounting



1239519

<https://www.phoenixcontact.com/us/products/1239519>

| | |
|---|--|
| Ambient temperature (operation) (male connector/female connector) | -25 °C ... 85 °C (Plug / socket) |
| Ambient temperature (operation) (Cable, fixed installation) | -40 °C ... 85 °C (without mechanical actuation) |
| Ambient temperature (operation) (Cable, flexible installation) | -25 °C ... 105 °C (Cable, flexible installation) |
| Ambient temperature (operation) (Cable, fixed installation) | -40 °C ... 105 °C (cable, fixed installation) |
| UL Type Rating | Type 4 (indoor use only) |

Standards and regulations

| | |
|--------------------------|------------------------------|
| Flame resistance | in acc. with UL FT-2 |
| Standard designation | M12 circular connector |
| Standards/specifications | according to IEC 61076-2-111 |


SACC-DSI-M12MSL-4CON-M16XL/0,2X - Device connector rear mounting

1239519

<https://www.phoenixcontact.com/us/products/1239519>

Drawings

Schematic diagram

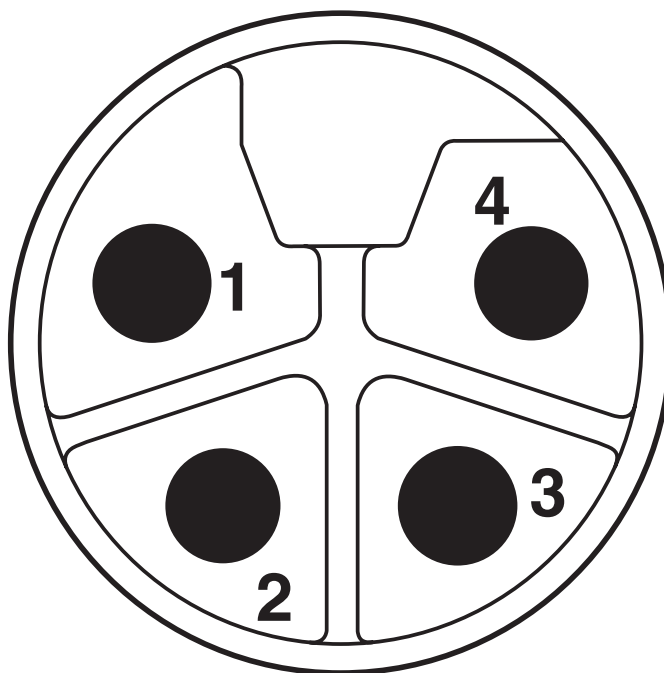

Pin assignment of M12 connector, 4-pos., L-coded, pin side view

SACC-DSI-M12MSL-4CON-M16XL/0,2X - Device connector rear mounting



1239519

<https://www.phoenixcontact.com/us/products/1239519>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1239519>

|  cULus Recognized Approval ID: E468743-20180113 | | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|--|-----------------------|-----------------------|-------------------|-----------------------------|
| keine | | 63 V | 16 A | 14 | - |

SACC-DSI-M12MSL-4CON-M16XL/0,2X - Device connector rear mounting



1239519

<https://www.phoenixcontact.com/us/products/1239519>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27440103 |
| ECLASS-15.0 | 27440103 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC003570 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

SACC-DSI-M12MSL-4CON-M16XL/0,2X - Device connector rear mounting



1239519

<https://www.phoenixcontact.com/us/products/1239519>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com