

RC-09P1N12T050X - Cable connector



1240591

<https://www.phoenixcontact.com/us/products/1240591>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



The figure shows the 12-pos.
product version

M23, Cable connector, application: Signal, series: RC, angled, shielded: yes, Screw locking mechanism, No. of pos.: 8+1, Direction of rotation: Standard, contact connection type: Pin, Solder cup, cable diameter range: 4.5 mm ... 5.5 mm, coding: N, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

Commercial data

Item number	1240591
Packing unit	8 pc
Minimum order quantity	1 pc
Product key	ABRAFC
GTIN	4063151423216
Weight per piece (including packing)	149.287 g
Weight per piece (excluding packing)	140.051 g
Country of origin	DE

RC-09P1N12T050X - Cable connector



1240591

<https://www.phoenixcontact.com/us/products/1240591>

Technical data

Product properties

Product type	Circular connector (cable-side)
--------------	---------------------------------

Connector

Insulating body

Coding	N
Material (Insulating body)	PBT
Material (Contact)	CuZn
Material (Contact surface)	Ni/Au
Insertion/withdrawal cycles	50
Connection method	Solder cup
Contact switching type	Pin
Application	Signal
Number of positions	9
Direction of rotation	Standard
Connection profile	8+1
Number (Contact group 1)	1
Contact diameter (Contact group 1)	2 mm
Litz wires Min. cross section (Contact group 1)	0.08 mm ²
Litz wires Max. cross section (Contact group 1)	2.5 mm ²
Rated current Contact (Contact group 1)	20 A (for max. connection cross section)
Rated voltage Contact (Contact group 1)	48 V AC 74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Number (Contact group 2)	8
Contact diameter (Contact group 2)	1 mm
Litz wires Max. cross section (Contact group 2)	1 mm ²
Rated current Contact (Contact group 2)	8 A
Rated voltage Contact (Contact group 2)	48 V AC 48 V AC

Housing

Type	Cable connector housing
Thread type	M23
Design	angled
Type of locking	Screw locking mechanism
Pg screw connection	none
Material (Housing)	GD-Zn
Material (Rotating parts)	CuZn

RC-09P1N12T050X - Cable connector



1240591

<https://www.phoenixcontact.com/us/products/1240591>

Material (Housing surface)	Ni
Material (Seal)	FPM (O-ring)
Degree of protection (plugged in)	IP67

Seal

External cable diameter	4.5 mm ... 5.5 mm
-------------------------	-------------------

RC-09P1N12T050X - Cable connector



1240591

<https://www.phoenixcontact.com/us/products/1240591>

Drawings

Schematic diagram




Connector pin assignment

RC-09P1N12T050X - Cable connector

1240591

<https://www.phoenixcontact.com/us/products/1240591>

Schematic diagram

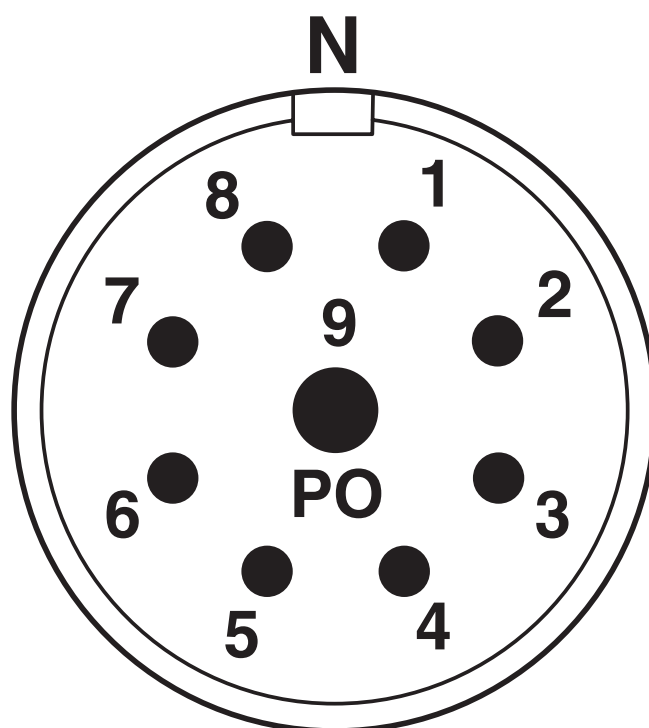


Connector pin assignment

RC-09P1N12T050X - Cable connector

1240591

<https://www.phoenixcontact.com/us/products/1240591>

Schematic diagram

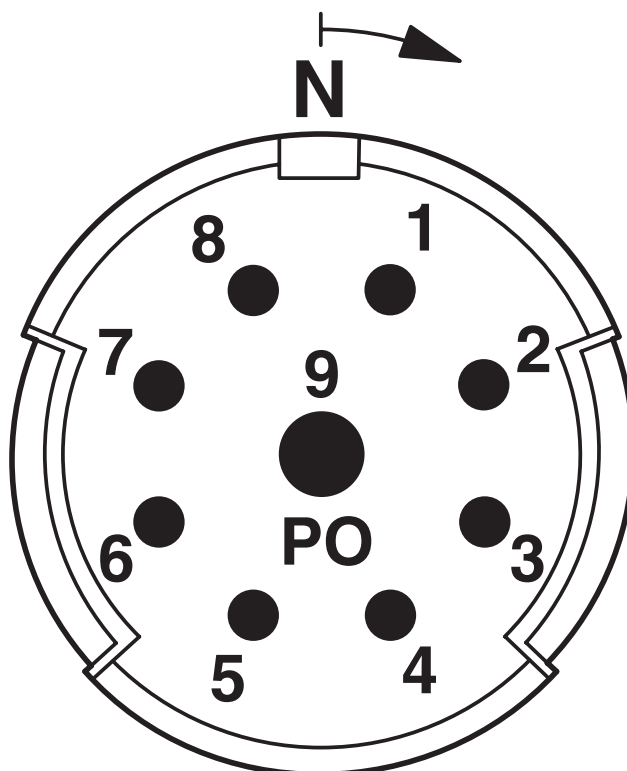

Connector pin assignment


RC-09P1N12T050X - Cable connector



1240591

<https://www.phoenixcontact.com/us/products/1240591>

Schematic diagram

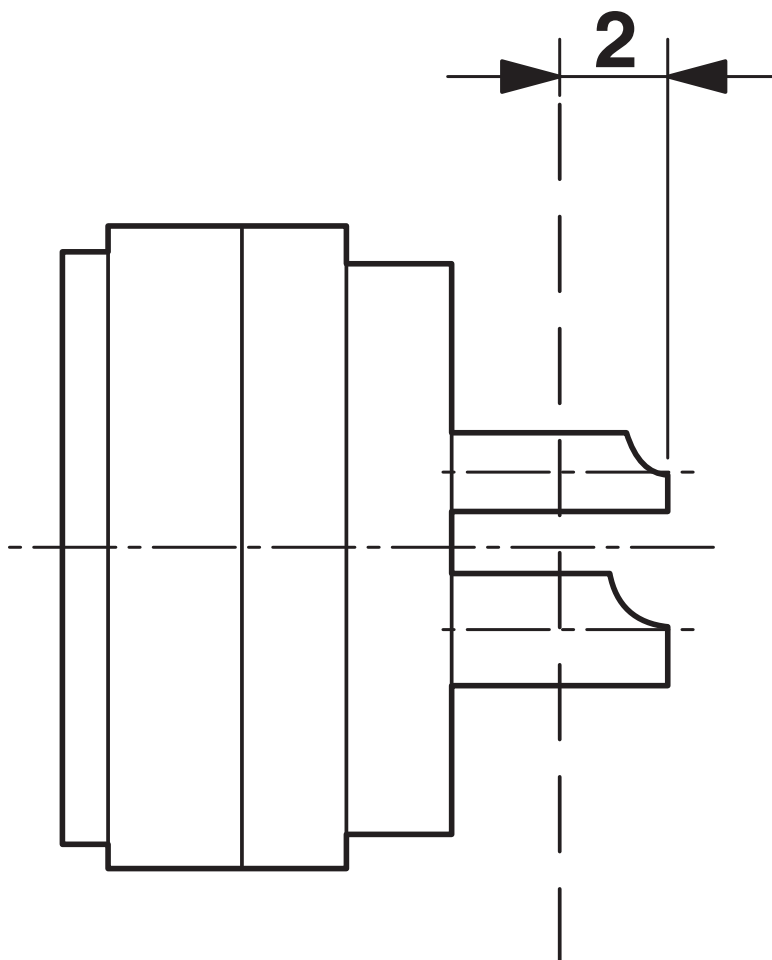

Dimensional drawing

RC-09P1N12T050X - Cable connector



1240591

<https://www.phoenixcontact.com/us/products/1240591>

Classifications

ECLASS

ECLASS-13.0

27440116

ETIM

ETIM 9.0

EC002635

RC-09P1N12T050X - Cable connector



1240591

<https://www.phoenixcontact.com/us/products/1240591>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com