

SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 5-position, PUR halogen-free, black-gray RAL 7021, Plug angled M8, coding: B, on free cable end, cable length: 1.5 m

Your advantages

- Easy and safe: 100 % electrically tested plug-in components

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 1404465 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | BF01 |
| Product key | AF1BDA |
| GTIN | 4046356696845 |
| Weight per piece (including packing) | 51.2 g |
| Weight per piece (excluding packing) | 51.2 g |
| Customs tariff number | 85444290 |
| Country of origin | PL |

SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

Technical data

Product properties

| | |
|----------------------|-----------------------|
| Product type | Sensor/actuator cable |
| Application | Standard |
| Number of positions | 5 |
| No. of cable outlets | 1 |
| Shielded | no |
| Coding | B |

Insulation characteristics

| | |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution | 3 |

Material specifications

| | |
|--|---|
| Flammability rating according to UL 94 | HB |
| Seal material | NBR |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material for screw connection | Zinc die-cast, nickel-plated |

Electrical properties

| | |
|-----------------------|----------------------------|
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage U_N | 30 V AC |
| | 30 V DC |
| Nominal current I_N | 3 A |

Mechanical properties

Mechanical data

| | |
|-----------------------------|------------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|------------|

Signaling

| | |
|------------------------|----|
| Status display | no |
| Status display present | no |

Connection data

Conductor connection

| | |
|-------------------|------------------------|
| Tightening torque | 0.2 Nm (M8 connectors) |
|-------------------|------------------------|

Connector

Connection 1

SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

| | |
|---------------------|----------------|
| Type | Plug angled M8 |
| Number of positions | 5 |
| Coding type | B |

Connection 2

| | |
|------|----------------|
| Type | free cable end |
|------|----------------|

Cable/line

| | |
|--------------|-------|
| Cable length | 1.5 m |
|--------------|-------|

PUR, black, 5th conductor gray [115]

| | |
|---|--|
| Cable weight | 30 kg/km |
| UL AWM Style | 20549 |
| Number of positions | 5 |
| Shielded | no |
| Cable type | PUR, black, 5th conductor gray [115] |
| Conductor structure signal line | 32x 0.10 mm |
| AWG signal line | 24 |
| Conductor cross-section | 0.25 mm ² |
| Wire diameter incl. insulation | 1.17 mm ±0.02 mm |
| External cable diameter | 4.70 mm ±0.15 mm |
| Outer sheath, material | PUR |
| External sheath, color | black-gray RAL 7021 |
| Conductor material | Bare Cu litz wires |
| Material, filler | PP |
| Material wire insulation | PP |
| Single wire, color | brown, white, blue, black, gray |
| Thickness, insulation | approx. 0.21 mm (Core insulation) approx. 0.70 mm (Outer cable sheath) |
| Overall twist | 5 cores, twisted |
| Length of twist, overall twist | 75 mm |
| Max. conductor resistance | ≤ 75 Ω/km |
| Insulation resistance | ≥ 1 GΩ*km |
| Nominal voltage, cable | ≤ 300 V (AC) |
| Test voltage | ≥ 3000 V (AC) |
| Smallest bending radius, fixed installation | 23.5 mm |
| Smallest bending radius, movable installation | 47 mm |
| Dynamic load capacity (bending) | Max. bending cycles: 10000000, Bending radius: 47 mm, Traversing path: 10 m, Traversing rate: 3 m/s, Acceleration: 10 m/s ² |
| Dynamic load capacity (torsion) | Torsion: ±180 °/m, Torsion cycles: ≥5000000, Torsional frequency: 35 cycles/min. |
| Halogen-free | in accordance with DIN VDE 0472 part 815 in accordance with DIN EN 50267-2-1 |
| Flame resistance | according to UL 758/1581 (horizontal) in accordance with UL 758/1581 FT2 |

SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

| | |
|---------------------------------|---|
| Resistance to oil | According to DIN EN 60811-2-1, 168 h at 100°C |
| Other resistance | hydrolysis and microbe resistant |
| | Resistant to salt water |
| | Low adhesion |
| | abrasion-resistant |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) |
| | -25 °C ... 80 °C (Cable, flexible installation) |

Environmental and real-life conditions

Ambient conditions

| | |
|---|----------------------------------|
| Degree of protection | IP65 |
| | IP67 |
| | IP68 |
| Ambient temperature (operation) (male connector/female connector) | -25 °C ... 90 °C (Plug / socket) |

Standards and regulations

| | |
|--------------------------|-----------------|
| Standard designation | M8 connector |
| Standards/specifications | IEC 61076-2-104 |


Drawings

Dimensional drawing



M8 x 1 male plug, angled version

Schematic diagram

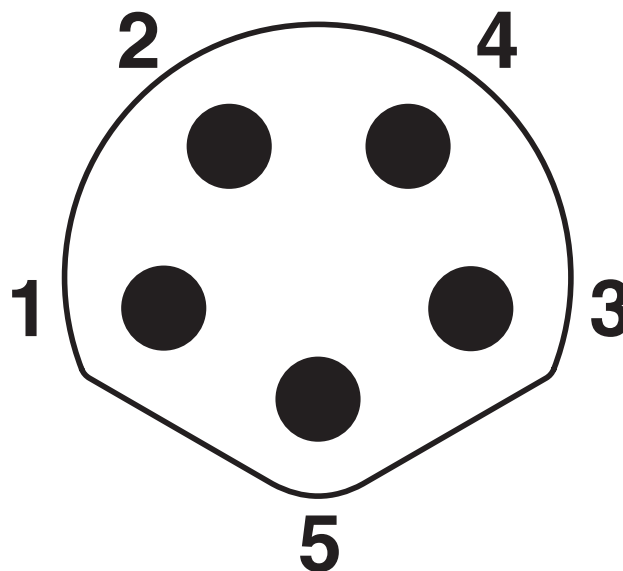

Pin assignment, pin side, M8, 5-pos., B-coded

SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

Circuit diagram



Contact assignment of the M8 plug

SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1404465>

|  UL Listed Approval ID: FILE E 221474 | | | | |
|--|-----------------------|-----------------------|-------------------|----------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| keine | | | | |
| | 30 V | 3 A | - | - |

|  cUL Listed Approval ID: FILE E 221474 | | | | |
|---|-----------------------|-----------------------|-------------------|----------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| keine | | | | |
| | 30 V | 3 A | - | - |

|  EAC-RoHS Approval ID: RU D-DE.HB35.B.00387 | | | | |
|--|--|--|--|--|
|--|--|--|--|--|

SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27060311 |
| ECLASS-15.0 | 27060311 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC001855 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

SAC-5P-M 8MRB/ 1,5-115 - Sensor/actuator cable



1404465

<https://www.phoenixcontact.com/us/products/1404465>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

EF3.1 Climate Change

| | |
|---------|---------------|
| CO2e kg | 1.001 kg CO2e |
|---------|---------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com