

# NBC-M12MS/ 1,0-94B/M12FS - Network cable



1407463

<https://www.phoenixcontact.com/us/products/1407463>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Network cable, Ethernet CAT5 (1 Gbps), 8-position, PUR halogen-free, water blue RAL 5021, shielded (Advanced Shielding Technology), Plug straight M12, coding: A / IP67, on Socket straight M12, coding: A / IP67, cable length: 1 m

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1407463       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | BF04          |
| Product key                          | AF1CMI        |
| GTIN                                 | 4046356775847 |
| Weight per piece (including packing) | 84.4 g        |
| Weight per piece (excluding packing) | 72.99 g       |
| Customs tariff number                | 85444210      |
| Country of origin                    | PL            |

1407463

<https://www.phoenixcontact.com/us/products/1407463>

## Technical data

### Product properties

|                     |                         |
|---------------------|-------------------------|
| Product type        | Data cable preassembled |
| Application         | Standard                |
| Number of positions | 8                       |
| Shielded            | yes                     |

### Interfaces

|                      |                                   |
|----------------------|-----------------------------------|
| Signal type/category | Ethernet CAT5 (IEC 11801), 1 Gbps |
|----------------------|-----------------------------------|

### Electrical properties

|                       |         |
|-----------------------|---------|
| Nominal voltage $U_N$ | 48 V AC |
|                       | 60 V DC |
| Nominal current $I_N$ | 2 A     |
| Transmission medium   | Copper  |
| Transmission speed    | 1 Gbps  |

### Connector

#### Connection 1

|                             |  |
|-----------------------------|--|
| Dimensional drawing         |  <p>Pin assignment M12 plug, 8-pos., A-coded, view plug side</p> |
| Type                        | M12 Plug, angled, 8-position, shielded (Advanced Shielding Technology), Keying: A  |
| Number of positions         | 8  |
| Shielded                    | yes  |
| Shielding                   | Advanced Shielding Technology  |
| Signal type/category        | Ethernet CAT5, 1 bps   |
| Insertion/withdrawal cycles | ≥ 100  |
| Insulation resistance       | ≥ 100 Ω  |
| Overvoltage category        | II   |
| Degree of pollution         | 3  |
| Tightening torque           | 0.4 Nm (M12 connector)   |
| Material Contact            | CuZn   |
| Material Contact surface    | Ni/Au  |
| Material Contact carrier    | PA 6.6   |
| Material Screw connection   | Die-cast zinc, nickel-plated   |
| Material Grip body          | TPU, hardly inflammable, self-extinguishing  |

# NBC-M12MS/ 1,0-94B/M12FS - Network cable




1407463

<https://www.phoenixcontact.com/us/products/1407463>

|  |                  |
|--|------------------|
| Material Seal                          | FKM              |
| Flammability rating according to UL 94 | V0               |
| Ambient temperature (operation)        | -25 °C ... 85 °C |
| Standard designation                   | M12 connector    |
| Standards/regulations                  | IEC 61076-2-101  |

## Connection 2

|  |  |
|--|--|
| Dimensional drawing                    |  <p>Pin assignment M12 socket, 8-pos., A-coded, view female side</p> |
| Type                                   | M12 Socket, angled, 8-position, shielded (Advanced Shielding Technology), Keying: A  |
| Number of positions                    | 8  |
| Shielded                               | yes  |
| Shielding                              | Advanced Shielding Technology  |
| Signal type/category                   | Ethernet CAT5, 1 bps   |
| Insertion/withdrawal cycles            | ≥ 100  |
| Insulation resistance                  | ≥ 100 Ω  |
| Overvoltage category                   | II   |
| Degree of pollution                    | 3  |
| Tightening torque                      | 0.4 Nm (M12 connector)   |
| Material Contact                       | CuZn   |
| Material Contact surface               | Ni/Au  |
| Material Contact carrier               | PA 6.6   |
| Material Screw connection              | Die-cast zinc, nickel-plated   |
| Material Grip body                     | TPU, hardly inflammable, self-extinguishing  |
| Material Seal                          | FKM  |
| Flammability rating according to UL 94 | V0   |
| Ambient temperature (operation)        | -25 °C ... 85 °C   |
| Standard designation                   | M12 connector  |
| Standards/regulations                  | IEC 61076-2-101  |

## Cable/line

|              |     |
|--------------|-----|
| Cable length | 1 m |
|--------------|-----|

Ethernet flexible CAT5, 4-pair [94B]

# NBC-M12MS/ 1,0-94B/M12FS - Network cable



1407463

<https://www.phoenixcontact.com/us/products/1407463>

|   |   |
|---|---|
| Dimensional drawing                           |               |
| UL AWM Style                                  | 21238 (80 °C / 600 V)   |
| Number of positions                           | 8   |
| Shielded                                      | yes   |
| Cable type                                    | Ethernet flexible CAT5, 4-pair [94B]  |
| Conductor structure                           | 4x2xAWG26/7, SF/UTP   |
| AWG signal line                               | 26  |
| Conductor cross-section                       | 4x 2x 0.14 mm <sup>2</sup>  |
| Wire diameter incl. insulation                | 0.96 mm ±0.05 mm  |
| External cable diameter                       | 6.40 mm ±0.2 mm   |
| Outer sheath, material                        | PUR   |
| External sheath, color                        | water blue RAL 5021   |
| Conductor material                            | Bare Cu litz wires  |
| Material wire insulation                      | Foamed PE   |
| Single wire, color                            | white/blue-blue, white/orange-orange, white/green-green, white/brown-brown                      |
| Twisted pairs                                 | 2 cores to the pair   |
| Overall twist                                 | 4 pairs for core  |
| Optical shield covering                       | 70 %  |
| Insulation resistance                         | ≥ 500 MΩ*km   |
| Loop resistance                               | ≤ 290.00 Ω/km   |
| Wave impedance                                | 100 Ω ±5 Ω (at 100 MHz)   |
| Nominal voltage, cable                        | ≤ 100 V   |
| Test voltage Core/Core                        | 2000 V (50 Hz, 1 min.)  |
| Test voltage Core/Shield                      | 2000.00 V (50 Hz, 1 min.)   |
| Minimum bending radius, fixed installation    | 4 x D   |
| Minimum bending radius, flexible installation | 8 x D   |
| Smallest bending radius, fixed installation   | 26 mm   |
| Smallest bending radius, movable installation | 51 mm   |
| Halogen-free                                  | according to IEC 60754-1  |
| Flame resistance                              | according to IEC 60332-1-2<br>according to CSA C 22.2 No. 210-FT1                               |
| Resistance to oil                             | in accordance with EN 60811-2-1   |
| Ambient temperature (operation)               | -40 °C ... 80 °C (cable, fixed installation)<br>-20 °C ... 80 °C (Cable, flexible installation) |

## Environmental and real-life conditions

# NBC-M12MS/ 1,0-94B/M12FS - Network cable



1407463

<https://www.phoenixcontact.com/us/products/1407463>

## Ambient conditions

|                      |      |
|----------------------|------|
| Degree of protection | IP65 |
|                      | IP67 |

Drawings

Dimensional drawing



Plug, M12 x 1, straight, shielded

Dimensional drawing



M12 x 1 socket, straight, shielded

1407463

<https://www.phoenixcontact.com/us/products/1407463>

Schematic diagram



Pin assignment M12 plug, 8-pos., A-coded, view plug side

Schematic diagram




Pin assignment M12 socket, 8-pos., A-coded, view female side

1407463

<https://www.phoenixcontact.com/us/products/1407463>

Circuit diagram

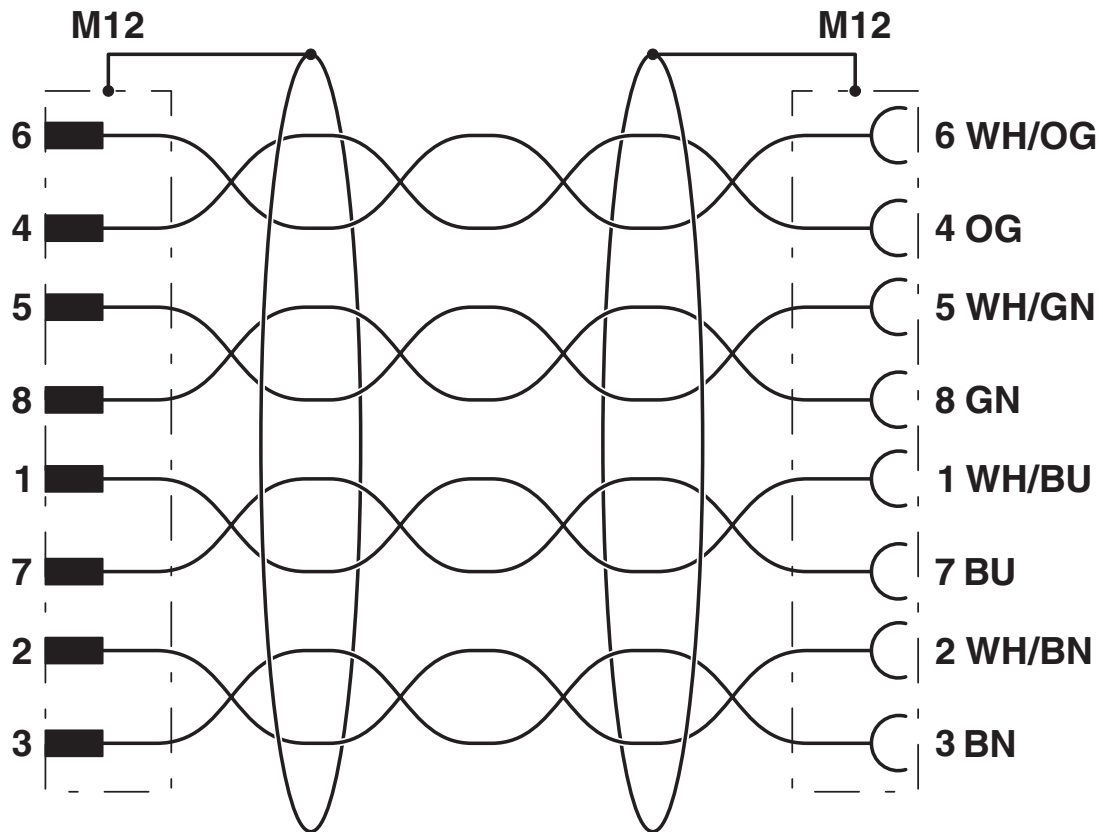

Contact assignment of the M12 connector and the M12 socket

# NBC-M12MS/ 1,0-94B/M12FS - Network cable





1407463

<https://www.phoenixcontact.com/us/products/1407463>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1407463>

|  <b>UL Listed</b><br>Approval ID: FILE E 335024 |                       |                       |                   |                             |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| keine  |                       |                       |                   |                             |
|  | 30 V                  | 1.5 A                 | -                 | -                           |

|  <b>cUL Listed</b><br>Approval ID: FILE E 335024 |                       |                       |                   |                             |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
|   | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| keine   |                       |                       |                   |                             |
|   | 30 V                  | 1.5 A                 | -                 | -                           |

|  <b>EAC-RoHS</b><br>Approval ID: RU D-DE.HB35.B.00387 |  |
|--|--|
|--|--|

# NBC-M12MS/ 1,0-94B/M12FS - Network cable



1407463

<https://www.phoenixcontact.com/us/products/1407463>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27060307 |
| ECLASS-15.0 | 27060307 |

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

# NBC-M12MS/ 1,0-94B/M12FS - Network cable



1407463

<https://www.phoenixcontact.com/us/products/1407463>

## Environmental product compliance

### EU RoHS

|   |                    |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

### China RoHS

|  |  |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E                                   |
|  | No hazardous substances above the limits |

### EU REACH SVHC

|                                     |                            |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

### EF3.1 Climate Change

|         |              |
|---------|--------------|
| CO2e kg | 1.77 kg CO2e |
|---------|--------------|

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)