

SACC-DSI-FSY-8CON-M16-L180 SCO - Device connector rear mounting



1407503

<https://www.phoenixcontact.com/us/products/1407503>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M12 panel feed-through, rear mounting

Device connector rear mounting, Ethernet CAT5 (IEC 11801:2002) (100 Mbps), 8-position, Socket, straight, M12-SPEEDCON, Y-coding, Wave soldering, this item is expected to be lead-free from Q2 2026 in accordance with RoHS II without exception 6c (Pb < 0.1%), a lead-free alternative is possible on request in advance

Your advantages

- Easy PCB assembly: one-piece connectors for wave soldering
- All standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design
- For high transmission reliability: optional shield connection to the housing by means of shield contact

Commercial data

Item number	1407503
Packing unit	20 pc
Minimum order quantity	20 pc
Sales key	AB26
Product key	ABQEHB
GTIN	4046356807920
Weight per piece (including packing)	17.005 g
Weight per piece (excluding packing)	15.844 g
Customs tariff number	85366990
Country of origin	DE

SACC-DSI-FSY-8CON-M16-L180 SCO - Device connector rear mounting



1407503

<https://www.phoenixcontact.com/us/products/1407503>

Technical data

Notes

Notes on operation	The electrical and mechanical data specified assumes that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of pollution, the connector must be sealed using a protective cap >IP54. Influences arising from litz wires, cables, or PCB mounting must also be taken into consideration. Additional mechanical fixing of the PCB is required.
Order information:	Lock nut is included in the scope of delivery

Mounting

Mounting type	Rear mounting (M16 x 1,5)
Tightening torque	3 Nm ... 4 Nm (Installation-side)

Product properties

Product type	Circular connectors (device side)
Application	Data, signals
Sensor type	Ethernet
Number of positions	8
Shielded	yes
Coding	Y
Thread type	M12

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Material specifications

Material Housing	GD-Zn
Material Housing surface	Ni
Material Contact carrier	PPA
Material Contact	CuZn
Material Contact surface	Au
Material Seal	FKM
Flammability rating according to UL 94	V0

Electrical properties

Rated surge voltage	0.8 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	> 100 MΩ
Nominal voltage U _N	48 V AC (Power and data) 50 V DC (Power and data)

SACC-DSI-FSY-8CON-M16-L180 SCO - Device connector rear mounting



1407503

<https://www.phoenixcontact.com/us/products/1407503>

Nominal current I_N	0.5 A (Data) 6 A (Power)
Transmission medium	Copper
Transmission speed	100 Mbps
Transmission characteristics (category)	CAT5 (IEC 11801:2002)

Connection data

Conductor connection

Connection method	Wave soldering
Contact connection type	Socket
Tightening torque	3 Nm ... 4 Nm (Installation-side)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 100
-----------------------------	------------

Connector

Connection 1

Head design	Socket
Head cable outlet	straight
Head thread type	M12
Head locking type	SPEEDCON
Coding	Y

Cable/line

Signal type/category	Ethernet CAT5 (IEC 11801:2002), 100 Mbps
----------------------	--

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
Ambient temperature (operation) (male connector/female connector)	-25 °C ... 85 °C
Ambient temperature (operation)	-40 °C ... 85 °C (without mechanical actuation)
UL Type Rating	Type 4 (indoor use only)

Standards and regulations

Standard designation	M12 circular connector
Standards/specifications	according to IEC 61076-2-113


SACC-DSI-FSY-8CON-M16-L180 SCO - Device connector rear mounting




1407503

<https://www.phoenixcontact.com/us/products/1407503>

Drawings

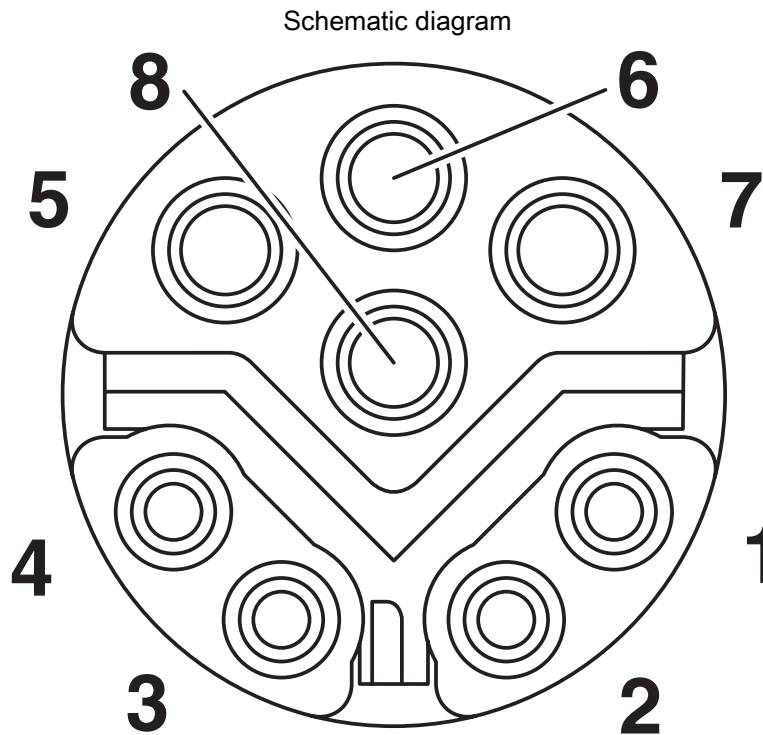

Pin assignment of socket, 8-pos., Y-coded, socket side view

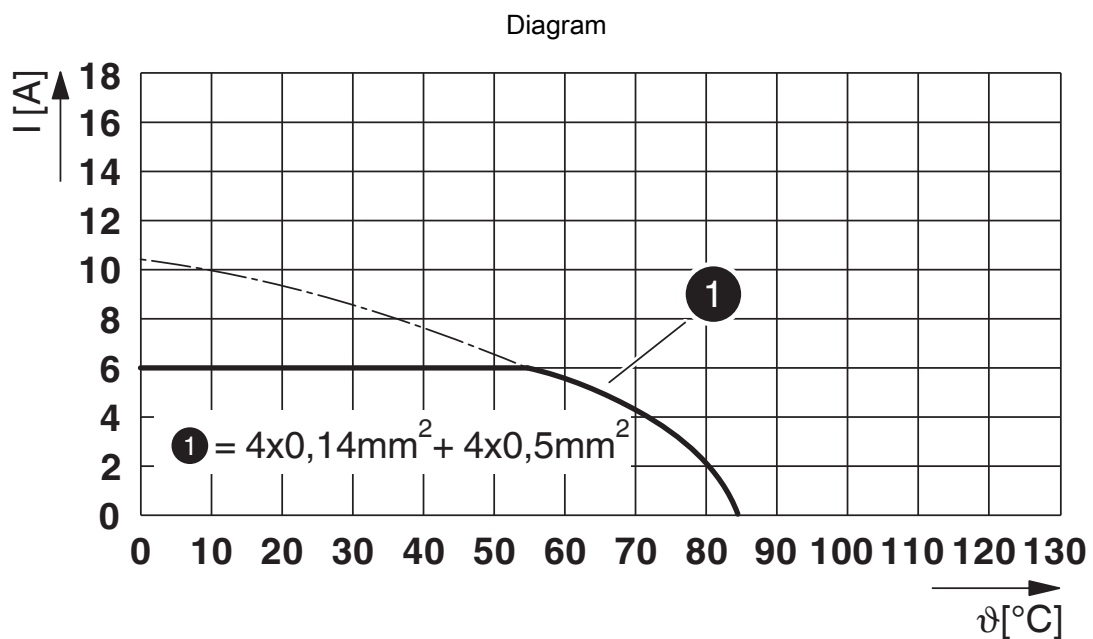

I = current strength, T = ambient temperature

SACC-DSI-FSY-8CON-M16-L180 SCO - Device connector rear mounting





1407503

<https://www.phoenixcontact.com/us/products/1407503>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1407503>

 cUL Recognized Approval ID: E335024-20120308				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
Power	56 V	0.175 A	-	-
Data	30 V	0.5 A	-	-

 UL Recognized Approval ID: E335024-20120308				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
Power	56 V	0.175 A	-	-
Data	30 V	0.5 A	-	-

SACC-DSI-FSY-8CON-M16-L180 SCO - Device connector rear mounting



1407503

<https://www.phoenixcontact.com/us/products/1407503>

Classifications

ECLASS

ECLASS-13.0	27440110
ECLASS-15.0	27440110

ETIM

ETIM 10.0	EC003568
-----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

SACC-DSI-FSY-8CON-M16-L180 SCO - Device connector rear mounting



1407503

<https://www.phoenixcontact.com/us/products/1407503>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	1e0a0e10-e2c3-4761-94d5-05a2e0e4c20f

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com