

HC-COM- 8-EBUC - Contact insert



1408494

<https://www.phoenixcontact.com/us/products/1408494>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, number of positions: 8+PE, size: COM, power contacts: 8, control contacts: 0, number of connections per position: 1, Socket, Crimp connection, 500 V, 16 A, 0.5 mm² ... 4 mm², application: Power, Only suitable for plastic housings

Product description

Contact insert, incl. 4 mounting screws

Your advantages

- Shock and vibration-resistant in accordance with DIN EN 61373

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1408494 |
| Packing unit | 2 pc |
| Minimum order quantity | 2 pc |
| Sales key | BF61 |
| Product key | AF7ABH |
| GTIN | 4046356618205 |
| Weight per piece (including packing) | 16.4 g |
| Weight per piece (excluding packing) | 16.35 g |
| Customs tariff number | 85389099 |
| Country of origin | CN |

HC-COM- 8-EBUC - Contact insert



1408494

<https://www.phoenixcontact.com/us/products/1408494>

Technical data

Mounting

| | |
|---------------|---|
| Assembly note | To ensure correct use, installation in housing with IP54 protection or better is required |
|---------------|---|


Product properties

| | |
|------------------------------------|--|
| Product type | Contact insert with a fixed no. of positions |
| Series | HC-COM |
| Application | Power |
| Type | COM |
| Number of positions | 8 |
| Connection profile | 8+PE |
| Contact numbering | 1 - 8 |
| Number of connections per position | 1 |
| No. of power contacts | 8 |
| No. of control contacts | 0 |
| Contact material type | turned |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Dimensions

| | |
|---------------------|--|
| Dimensional drawing |  |
| Width | 22.4 mm |
| Height | 38.5 mm |
| Length | 41.6 mm |

Mechanical characteristics

| | |
|------------------|--------|
| Contact diameter | 2.5 mm |
|------------------|--------|

Connection data

Connection technology

| | |
|------------------------------------|------------------|
| Connection technology | Crimp connection |
| Number of connections per position | 1 |
| Connection in acc. with standard | IEC / EN |

Conductor connection

| | |
|-------------------------|---|
| Conductor cross-section | 0.5 mm ² ... 4 mm ² |
|-------------------------|---|

HC-COM- 8-EBUC - Contact insert



1408494

<https://www.phoenixcontact.com/us/products/1408494>

| | |
|---|-----------|
| Connection cross section AWG | 20 ... 12 |
| Stripping length of the individual wire | 7.5 mm |

Electrical properties

| | |
|----------------------------------|-------|
| Rated voltage (III/3) | 500 V |
| Rated voltage for power contacts | 500 |
| Rated surge voltage | 6 kV |
| Rated current | 16 A |

Mechanical properties

Mechanical data

| | |
|-----------------------------|-------|
| Insertion/withdrawal cycles | ≥ 500 |
|-----------------------------|-------|

Material specifications

| | |
|--|-----------------------|
| Flammability rating according to UL 94 | V0 |
| Contact material | Copper alloy |
| Contact surface material | Ag (alternatively Au) |
| Contact carrier material | PC |

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|--|
| Ambient temperature (operation) | -40 °C ... 100 °C (including heating up of contacts) |
|---------------------------------|--|

HC-COM- 8-EBUC - Contact insert




1408494

<https://www.phoenixcontact.com/us/products/1408494>

Drawings

Dimensional drawing

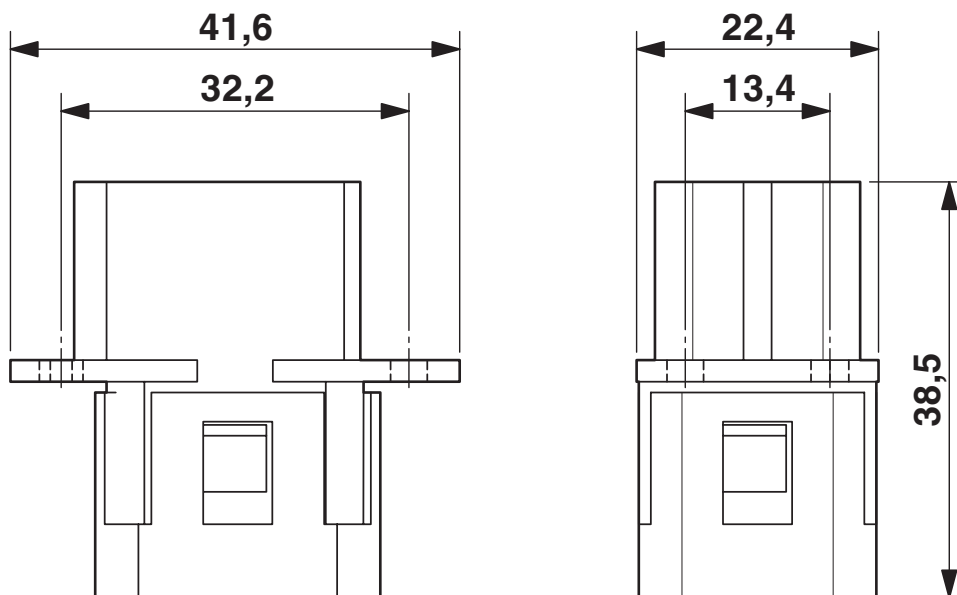

HC-COM-8-EBUC dimensional drawing


HC-COM- 8-EBUC - Contact insert

1408494

<https://www.phoenixcontact.com/us/products/1408494>



Schematic diagram

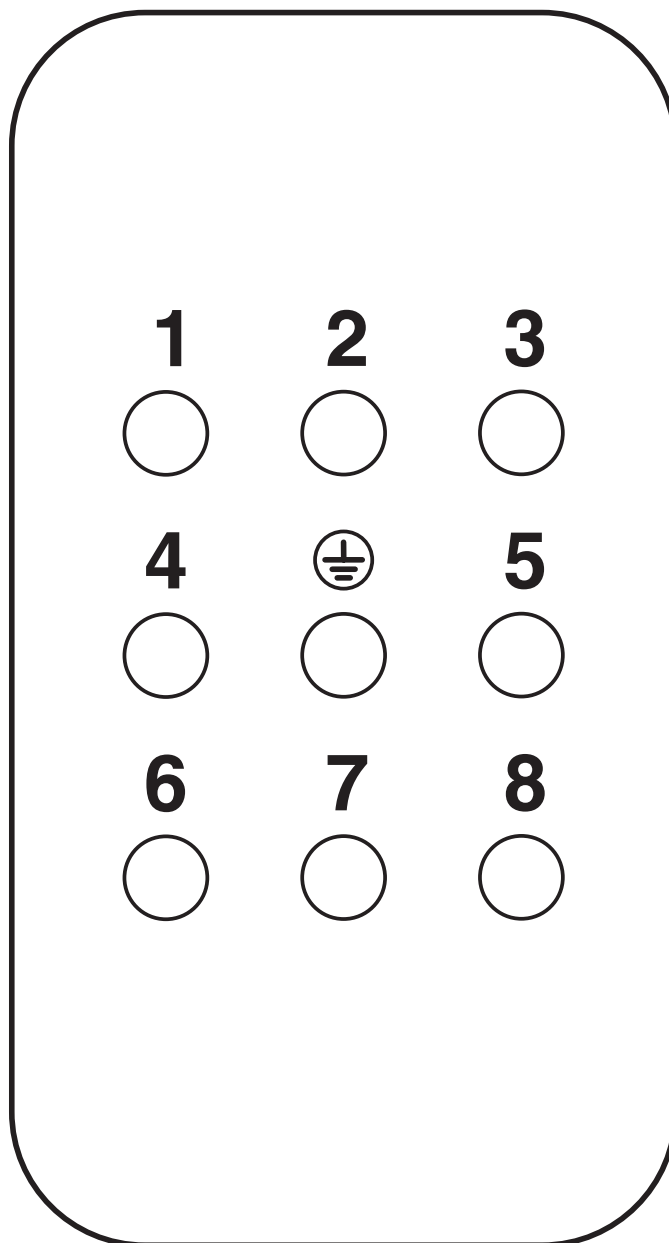


Connector pin assignment, connection side

HC-COM- 8-EBUC - Contact insert



1408494

<https://www.phoenixcontact.com/us/products/1408494>

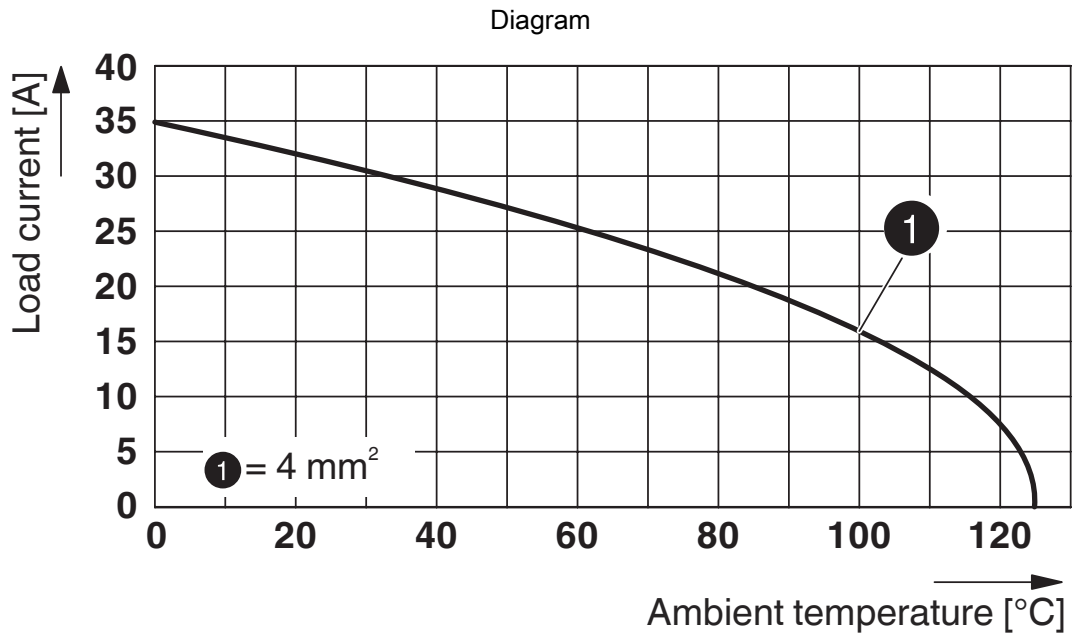

Derating diagram for 4 mm²

HC-COM- 8-EBUC - Contact insert





1408494

<https://www.phoenixcontact.com/us/products/1408494>


Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1408494>

|  CSA Approval ID: 260458 | | | | |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| keine | | | | |
| | 600 V | 19 A | 20 - 12 | - |

|  cUL Recognized Approval ID: E118976 | | | | |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| keine | | | | |
| | 600 V | - | 20 - 12 | - |

|  UL Recognized Approval ID: E118976 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| keine | | | | |
| | 600 V | - | 20 - 12 | - |

|  EAC Approval ID: RU C-DE.AI30.B.01102 | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

HC-COM- 8-EBUC - Contact insert



1408494

<https://www.phoenixcontact.com/us/products/1408494>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27440205 |
| ECLASS-15.0 | 27440205 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000438 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121500 |
|-------------|----------|

HC-COM- 8-EBUC - Contact insert



1408494

<https://www.phoenixcontact.com/us/products/1408494>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com