# HC-STA-B24-BWD-ELC-AL - Housing

1411331

https://www.phoenixcontact.com/us/products/1411331

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



HEAVYCON B24 panel mounting base, with double locking latch, with flat gasket, salt-water-resistant aluminum, conductive profile gasket

## Your advantages

- Good shielding in the event of electromagnetic interference

## Commercial data

| | |
|---|---|
| Item number | 1411331 |
| Packing unit | 1 pc |
| Minimum order quantity | 60 pc |
| Sales key | BF56 |
| Product key | AF7APB |
| GTIN | 4046356927512 |
| Weight per piece (including packing) | 134.5 g |
| Weight per piece (excluding packing) | 133 g |
| Customs tariff number | 85389099 |
| Country of origin | CN |

## Technical data


### Notes

| | |
|---|---|
| Notes on the product family | For contact inserts HC-B24, BB46, D64, DD108, M |
| Note on application | compatible with module carrier frames with click-in function |

### Product properties

| | |
|---|---|
| Product type | Housing with locking latch |
| Housing type | Panel mounting base |
| Application | Standard |
| Type | B24 |
| Pg screw connection | none |

### Dimensions

| | |
|---|---|
| Dimensional drawing |   |
| Width | 53 mm |
| Height | 30.5 mm |
| Length | 140.5 mm |
| Drill hole distance, horizontal | 130 mm |
| Drill hole distance, vertical | 32 mm |
| Hole diameter | 4.5 mm |

Installation dimensions

| | |
|---|---|
| Width of the assembly cutout | 35 mm |
| Length of the assembly cutout | 113 mm |

### Material specifications

| | |
|---|---|
| Flammability rating according to UL 94 | V0 (Interlock) |
| Material grommet GRP | NBR, conductive (profile gasket) |
| | NBR, conductive (Flat gasket) |
| Housing material | Die-cast aluminum, salt water resistant |
| Housing surface material | uncoated |
| Locking latch material | Polyamide |

### Mechanical properties

Mechanical data

| | |
|---|---|
| Locking type | Latch |

### Connection data

| | |
|---|---|
| Tightening torque | 0.8 Nm ... 1.2 Nm (For M4 mounting screws on the panel-mount base) |


## Environmental and real-life conditions

### Ambient conditions

| | |
|---|---|
| Degree of protection | IP66 |
| | IP67 |
| Enclosure rating (NEMA) | 4 (UL 50e) |
| | 4X (UL 50e) |
| | 12 (UL 50e) |
| Impact strength | IK09 |
| Ambient temperature (operation) | -40 °C ... 125 °C |


## Drawings

Dimensional drawing

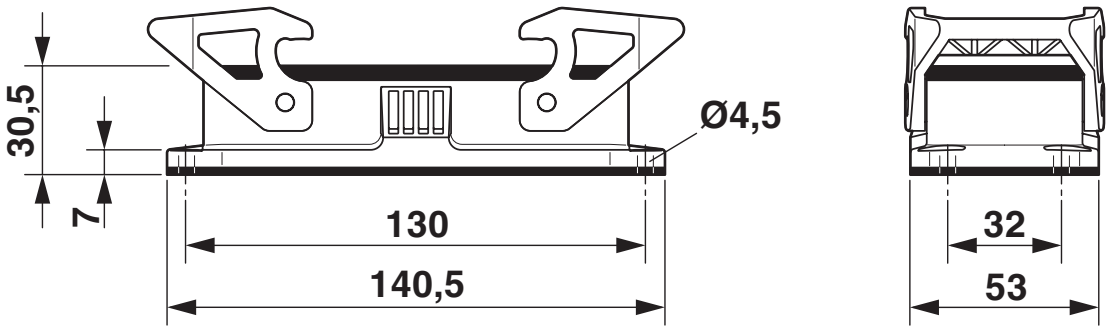


Dimensional drawing

Dimensional drawing

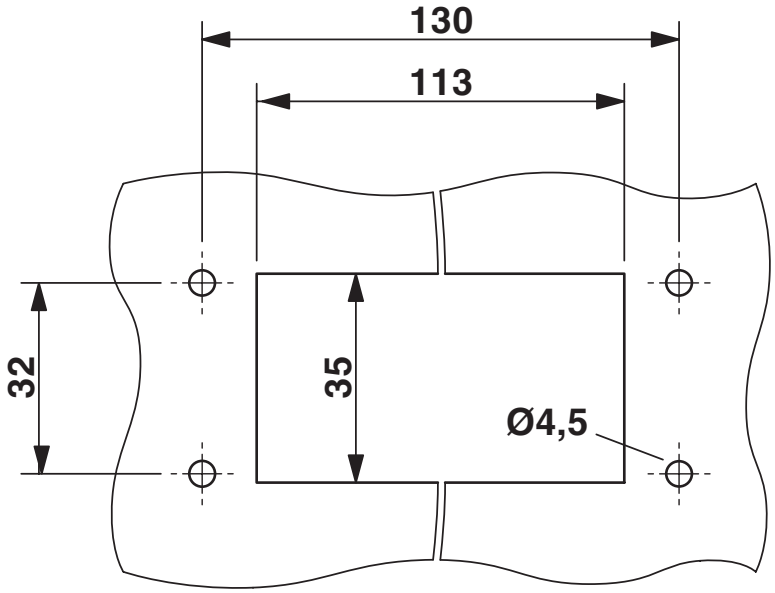


Mounting cutout

## Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1411331

**DNV**
Approval ID: TAE000037S

**cUL Recognized**
Approval ID: E255026

**UL Recognized**
Approval ID: E255026

## Classifications

### ECLASS

| | |
|---|---|
| ECLASS-13.0 | 27440202 |
| ECLASS-15.0 | 27440202 |

### ETIM

| | |
|---|---|
| ETIM 10.0 | EC000437 |

### UNSPSC

| | |
|---|---|
| UNSPSC 21.0 | 31261500 |

## Environmental product compliance

EU RoHS

| | |
|---|---|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |

China RoHS

| | |
|---|---|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|---|---|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |


Phoenix Contact 2026 © - all rights reserved
https://www.phoenixcontact.com



Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com