

NBC-FSBPXS/2,0-94F/R4AC-10G - Network cable



1412316

<https://www.phoenixcontact.com/us/products/1412316>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Network cable, degree of protection: IP67/IP20, cable length: 2 m, number of positions: 8, 10 Gbps, CAT6_A, cable outlet: straight, Ethernet, 4x2xAWG26/7; S/FTP, water blue RAL 5021

Your advantages

- Perfect for industrial applications
- Perfect for office, building, and protected industrial applications (e.g., in control cabinets)
- Compact angle

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 1412316 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | AB18 |
| Product key | ABNPAC |
| GTIN | 4046356953771 |
| Weight per piece (including packing) | 131.6 g |
| Weight per piece (excluding packing) | 122.523 g |
| Customs tariff number | 85444290 |
| Country of origin | PL |

1412316

<https://www.phoenixcontact.com/us/products/1412316>

Technical data

Product properties

| | |
|---------------------|-----------------------------------|
| Product type | Circular connectors (device side) |
| Type | M12 |
| Sensor type | Ethernet |
| Number of positions | 8 |
| Number of slots | 1 |
| Shielded | yes |
| Coding | X |
| Cable outlet | straight |

Insulation characteristics

| | |
|---------------------|---|
| Degree of pollution | 3 |
|---------------------|---|

Material specifications

| | |
|--|-------------------------------|
| Material | Zinc die-cast (nickel-plated) |
| Flammability rating according to UL 94 | V2 |
| Seal material | FKM |
| Material of grip body | Zinc die-cast, nickel-plated |
| Contact material | CuZn |
| Contact surface material | gold-plated |
| Contact carrier material | PPA |
| Material for screw connection | Zinc die-cast, nickel-plated |
| Outer sheath, material | PUR |

Electrical properties

| | |
|---|-------------------|
| Rated voltage (III/3) | 72 V (DC) |
| Nominal voltage U_N | 48 V |
| Nominal current I_N | 0.5 A |
| Transmission medium | Copper |
| Transmission speed | 10 Gbps |
| Transmission characteristics (category) | CAT6 _A |
| Transmission speed | 10 Gbps |

Connector

Connection 1

| | |
|-----------------------------|--|
| Type | Flush-type female connector straight M12 |
| Locking type | SPEEDCON |
| Coding type | X (Data) |
| Insertion/withdrawal cycles | >= 100 |
| Degree of protection | IP65/IP67 |

Connection 2

NBC-FSBPXS/2,0-94F/R4AC-10G - Network cable



1412316


<https://www.phoenixcontact.com/us/products/1412316>

| | |
|-----------------------------|--------------------|
| Type | Plug straight RJ45 |
| Insertion/withdrawal cycles | >= 750 |
| Degree of protection | IP20 |

Cable/line

| | |
|--------------|--------|
| Cable length | 2.00 m |
|--------------|--------|

Ethernet 10 Gbit [94F]

| | |
|---------------------------------|--|
| Dimensional drawing |  |
| Cable weight | 42 kg/km |
| UL AWM Style | 20963 (80°C/30 V) |
| Number of positions | 8 |
| Shielded | yes |
| Cable type | Ethernet 10 Gbit [94F] |
| Conductor structure | 4x2xAWG26/7; S/FTP |
| Signal runtime | 5.13 ns/m |
| Conductor structure signal line | 7x 0.16 mm |
| AWG signal line | 26 |
| Conductor cross-section | 4x 2x 0.14 mm ² |
| Wire diameter incl. insulation | 1.04 mm |
| External cable diameter | 6.40 mm ±0.2 mm |
| Outer sheath, material | PUR |
| External sheath, color | water blue RAL 5021 |
| Conductor material | Bare Cu litz wires |
| Material wire insulation | Foamed PE |
| Single wire, color | white/blue-blue, white/orange-orange, white/green-green, white/brown-brown |
| Thickness, outer sheath | 0.65 mm |
| Twisted pairs | 2 cores to the pair |
| Type of pair shielding | Aluminum-lined foil |
| Overall twist | 4 pairs for core |
| Optical shield covering | 70 % |
| Insulation resistance | ≥ 500 MΩ*km |
| Loop resistance | ≤ 290.00 Ω/km |
| Wave impedance | 100 Ω ±5 Ω (at 100 MHz) |
| Cable capacity | 47 nF/km |
| Nominal voltage, cable | ≤ 100 V |

NBC-FSBPXS/2,0-94F/R4AC-10G - Network cable



1412316

<https://www.phoenixcontact.com/us/products/1412316>

| | |
|--|--------------------------|
| Test voltage Core/Core | 700 V (50 Hz, 1 min.) |
| Test voltage Core/Shield | 700.00 V (50 Hz, 1 min.) |
| Minimum bending radius, fixed installation | 4 x D |
| Minimum bending radius, flexible installation | 8 x D |
| Smallest bending radius, fixed installation | 26 mm |
| Smallest bending radius, movable installation | 52 mm |
| Tensile strength | ≤ 100 N |
| Near end crosstalk attenuation (NEXT) | 75.3 dB (with 1 MHz) |
| | 66.3 dB (at 4 MHz) |
| | 61.8 dB (at 8 MHz) |
| | 60.3 dB (at 10 MHz) |
| | 57.2 dB (at 16 MHz) |
| | 55.8 dB (at 20 MHz) |
| | 54.3 dB (at 25 MHz) |
| | 52.8 dB (at 31.25 MHz) |
| | 48.4 dB (at 62.5 MHz) |
| | 45.3 dB (at 100 MHz) |
| | 40.8 dB (at 200 MHz) |
| | 39.3 dB (at 250 MHz) |
| | 38.1 dB (at 300 MHz) |
| Power-summated near end crosstalk attenuation (PSNEXT) | 38.1 dB (at 400 MHz) |
| | 38.1 dB (at 500 MHz) |
| | 72.3 dB (with 1 MHz) |
| | 63.3 dB (at 4 MHz) |
| | 58.8 dB (at 8 MHz) |
| | 57.3 dB (at 10 MHz) |
| | 54.2 dB (at 16 MHz) |
| | 52.8 dB (at 20 MHz) |
| | 51.3 dB (at 25 MHz) |
| | 49.9 dB (at 31.25 MHz) |
| | 45.4 dB (at 62.5 MHz) |
| | 42.3 dB (at 100 MHz) |
| | 37.8 dB (at 200 MHz) |
| 36.3 dB (at 250 MHz) | |
| Return attenuation (RL) | 35.1 dB (at 300 MHz) |
| | 33.3 dB (at 400 MHz) |
| | 31.8 dB (at 500 MHz) |
| | 20 dB (with 1 MHz) |
| | 23 dB (at 4 MHz) |
| | 24.5 dB (at 8 MHz) |
| | 25 dB (at 10 MHz) |
| 25 dB (at 16 MHz) | |
| 25 dB (at 20 MHz) | |
| 24.2 dB (at 25 MHz) | |

1412316

<https://www.phoenixcontact.com/us/products/1412316>


| | |
|------------------------------------|---|
| | 23.3 dB (at 31.25 MHz) |
| | 20.7 dB (at 62.5 MHz) |
| | 19 dB (at 100 MHz) |
| | 16.4 dB (at 200 MHz) |
| | 15.6 dB (at 250 MHz) |
| | 15.6 dB (at 300 MHz) |
| | 15.6 dB (at 400 MHz) |
| | 15.6 dB (at 500 MHz) |
| Shield attenuation | 3.1 dB (with 1 MHz) |
| | 5.7 dB (at 4 MHz) |
| | 8 dB (at 8 MHz) |
| | 8.9 dB (at 10 MHz) |
| | 11.2 dB (at 16 MHz) |
| | 12.6 dB (at 20 MHz) |
| | 14.1 dB (at 25 MHz) |
| | 15.8 dB (at 31.25 MHz) |
| | 22.5 dB (at 62.5 MHz) |
| | 28.7 dB (at 100 MHz) |
| | 41.4 dB (at 200 MHz) |
| | 46.6 dB (at 250 MHz) |
| | 51.4 dB (at 300 MHz) |
| | 60.1 dB (at 400 MHz) |
| | 67.9 dB (at 500 MHz) |
| | ≥ 80.00 dB (at 30 ... 100 MHz) |
| Halogen-free | according to IEC 60754-1 |
| Flame resistance | according to IEC 60332-1-2 |
| | in accordance with UN ECE-R 118.03 |
| Resistance to oil | in accordance with DIN EN 60811-2-1 |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) |
| | -20 °C ... 80 °C (Cable, flexible installation) |
| Ambient temperature (installation) | -20 °C ... 80 °C |

Environmental and real-life conditions

Ambient conditions

| | |
|---|----------------------------------|
| Degree of protection | IP67 (M12 socket) |
| | IP20 (RJ45 connector) |
| | IP67/IP20 |
| Ambient temperature (operation) (male connector/female connector) | -25 °C ... 60 °C (Plug / socket) |
| Ambient temperature (operation) (Cable, fixed installation) | -40 °C ... 80 °C |
| Ambient temperature (operation) (Cable, flexible installation) | -20 °C ... 80 °C |
| Ambient temperature (storage/transport) | -20 °C ... 80 °C |

Drawings

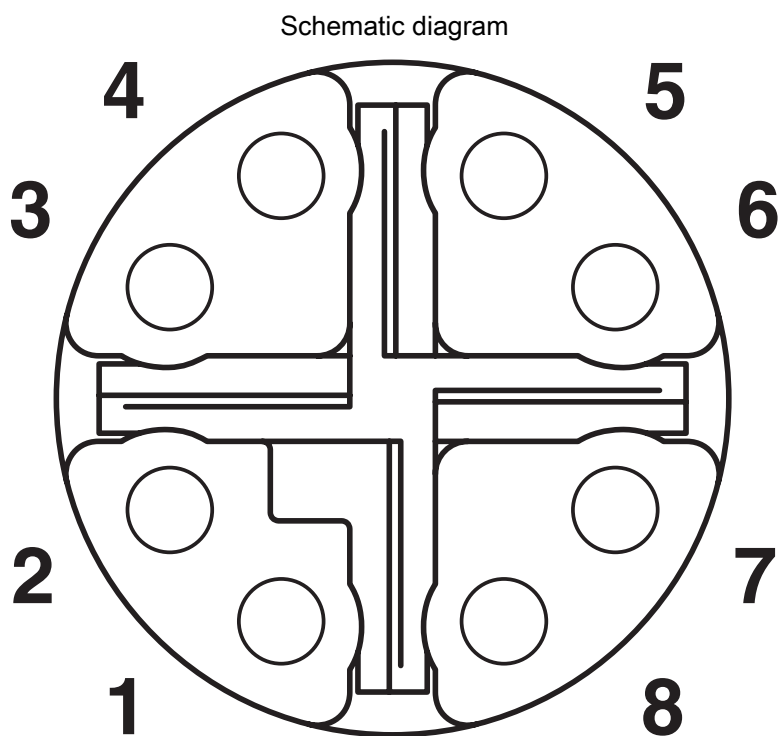

M12 socket pin assignment, 8-pos, view of socket side

Schematic diagram



Connector pin assignment plug RJ45

NBC-FSBPXS/2,0-94F/R4AC-10G - Network cable



1412316

<https://www.phoenixcontact.com/us/products/1412316>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1412316>



EAC

Approval ID: 19060508

1412316

<https://www.phoenixcontact.com/us/products/1412316>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27440103 |
| ECLASS-15.0 | 27440103 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC003570 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

1412316

<https://www.phoenixcontact.com/us/products/1412316>

Environmental product compliance

EU RoHS

| | |
|---|------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c) |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | c79959b2-1a59-45fb-95ba-c57b34e67859 |

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com