

MC-25/27-MULTI-67-PVO-BK - Cable feed-through plates



1415237

<https://www.phoenixcontact.com/us/products/1415237>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable feed-through plates, no. of conductors: 27, external cable diameter: 4x 5 mm ... 7 mm, 4x 8 mm ... 12 mm, 13x 10 mm ... 14 mm, 4x 14 mm ... 20 mm, 2x 20 mm ... 26 mm, material: galvanized sheet steel (Core), material: TPE-SEBS (external material), color: black, length: 222 mm, width: 92 mm, height: 29.5 mm

Your advantages

- Oil-resistant according to UL 157

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1415237 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | BF67 |
| Product key | AF7CAX |
| GTIN | 4055626039435 |
| Weight per piece (including packing) | 303 g |
| Weight per piece (excluding packing) | 285.3 g |
| Customs tariff number | 39269097 |
| Country of origin | FI |

MC-25/27-MULTI-67-PVO-BK - Cable feed-through plates



1415237

<https://www.phoenixcontact.com/us/products/1415237>

Technical data


Product properties

| | |
|-------------------|--------------------|
| Product type | Cable feed-through |
| No. of conductors | 27 |

Connection data

| | |
|-------------------------|-----------------------------------|
| External cable diameter | 4x 5 mm ... 7 mm |
| Tightening torque | 1.5 Nm ... 2 Nm (Mounting screws) |

Dimensions

| | |
|---------------------------------|---|
| Dimensional drawing |  |
| Width | 92 mm |
| Height | 29.5 mm |
| Length | 222 mm |
| Drill hole distance, horizontal | 62 mm |
| Drill hole distance, vertical | 194 mm |
| Hole diameter | 8.5 mm |

Material specifications

| | |
|--|-------------------------------|
| Color | black (RAL 9005) |
| Material interior | galvanized sheet steel (Core) |
| Material exterior | TPE-SEBS (external material) |
| Flammability rating according to UL 94 | V0 |

Cable/line

| | |
|----------------------------------|---------------------|
| External cable diameter 5-7 mm | 4x 5 mm ... 7 mm |
| External cable diameter 8-12 mm | 4x 8 mm ... 12 mm |
| External cable diameter 10-14 mm | 13x 10 mm ... 14 mm |
| External cable diameter 14-20 mm | 4x 14 mm ... 20 mm |
| External cable diameter 20-26 mm | 2x 20 mm ... 26 mm |

Environmental and real-life conditions

Ambient conditions

| | |
|----------------------|--|
| Degree of protection | IP66 (Minimum sheet thickness \geq 2.5 mm) |
| | IP67 (Minimum sheet thickness \geq 2.5 mm) |

MC-25/27-MULTI-67-PVO-BK - Cable feed-through plates



1415237

<https://www.phoenixcontact.com/us/products/1415237>

| | |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 100 °C |
|---------------------------------|-------------------|

Mounting

| | |
|---------------|--|
| Assembly note | M8 mounting screw, torque: 1.5 - 2.0 Nm, SW5 Allen key |
|---------------|--|


MC-25/27-MULTI-67-PVO-BK - Cable feed-through plates



1415237

<https://www.phoenixcontact.com/us/products/1415237>

Drawings

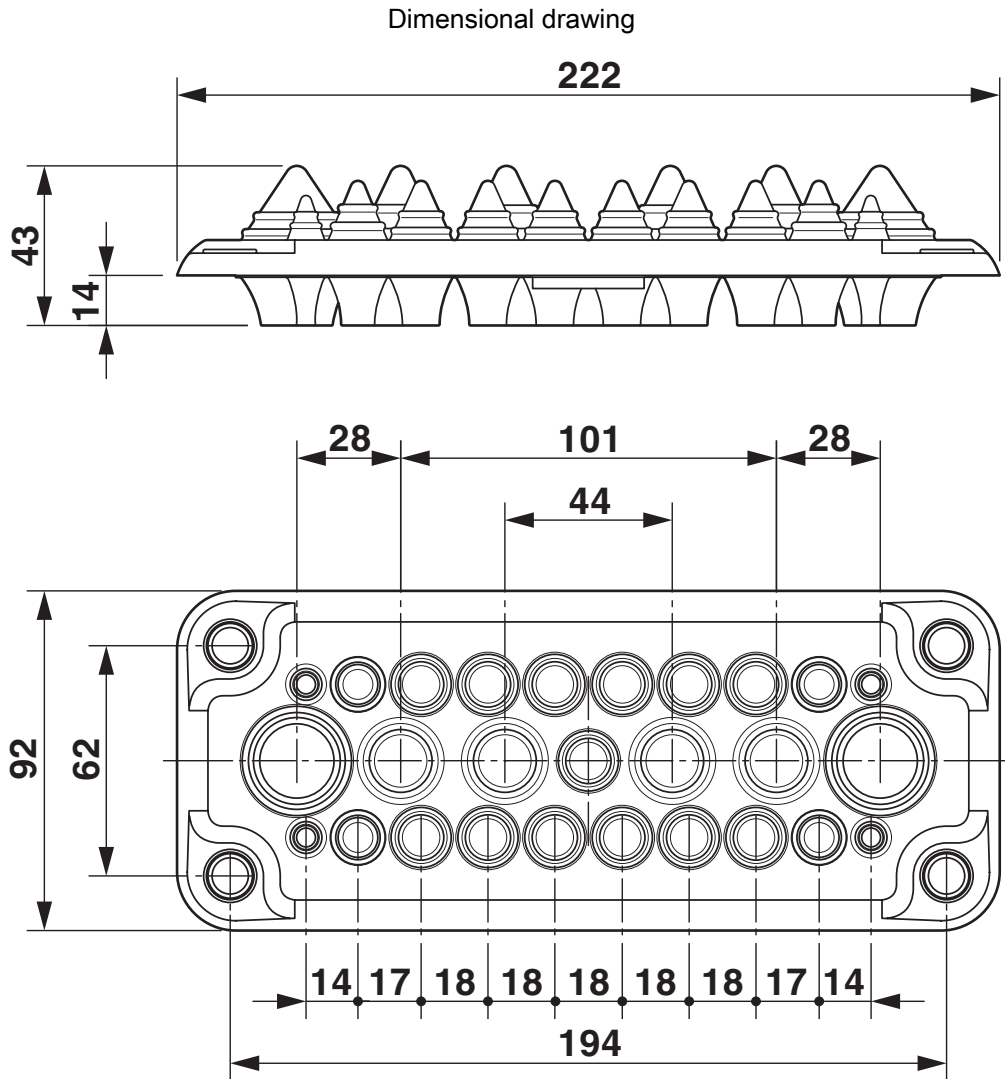

Dimensional drawing


MC-25/27-MULTI-67-PVO-BK - Cable feed-through plates



1415237

<https://www.phoenixcontact.com/us/products/1415237>

Dimensional drawing

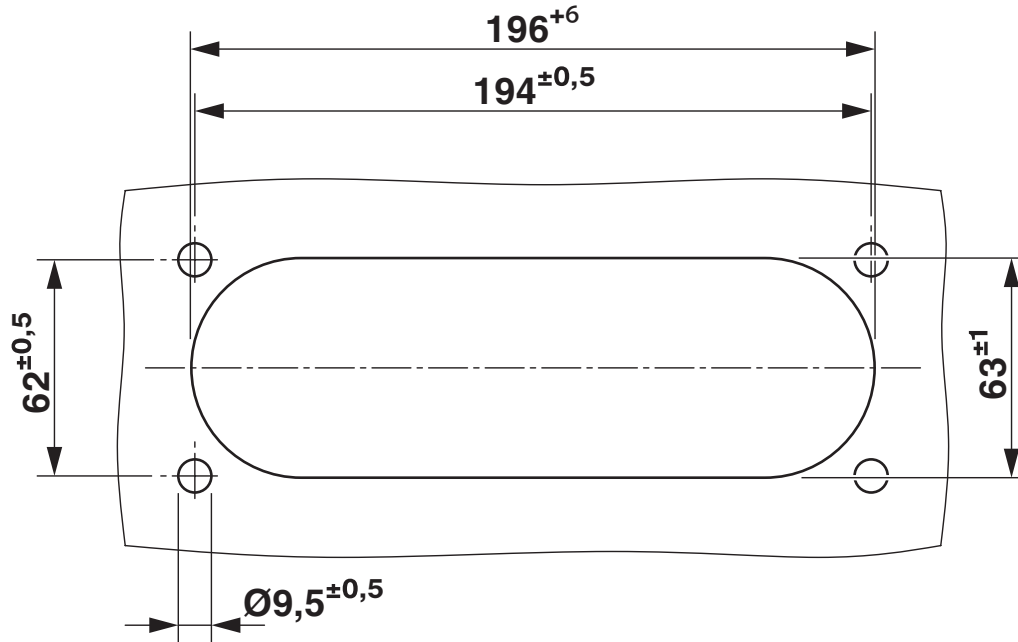

Wall cutout drawing

MC-25/27-MULTI-67-PVO-BK - Cable feed-through plates



1415237

<https://www.phoenixcontact.com/us/products/1415237>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1415237>



EAC-RoHS

Approval ID: RU D-DE.HB35.B.00387

MC-25/27-MULTI-67-PVO-BK - Cable feed-through plates



1415237

<https://www.phoenixcontact.com/us/products/1415237>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27400569 |
| ECLASS-15.0 | 27400569 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC001004 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 31163000 |
|-------------|----------|

MC-25/27-MULTI-67-PVO-BK - Cable feed-through plates



1415237

<https://www.phoenixcontact.com/us/products/1415237>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

EF3.1 Climate Change

| | |
|---------|---------------|
| CO2e kg | 2.494 kg CO2e |
|---------|---------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com