

VS-PPC/ME-PPC/ME-93B-LI/5,0 - Network cable



1416165

<https://www.phoenixcontact.com/us/products/1416165>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Assembled PROFINET cable, CAT5e, shielded, star quad, AWG 22 stranded (7-wire), RAL 6018 (yellow-green), RJ45 plug/IP67 push-pull metal housing on RJ45 plug/IP67 push-pull metal housing, line, length: 5 m

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1416165 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Product key | ABNABA |
| GTIN | 4046356474252 |
| Weight per piece (including packing) | 481 g |
| Weight per piece (excluding packing) | 444.474 g |
| Country of origin | PL |

VS-PPC/ME-PPC/ME-93B-LI/5,0 - Network cable



1416165

<https://www.phoenixcontact.com/us/products/1416165>

Technical data

Product properties

| | |
|---------------------|--------------------------|
| Product type | Data cable preassembled |
| Product family | RJ45 INDUSTRIAL PN4 CAT5 |
| Sensor type | PROFINET |
| Number of positions | 4 |
| Shielded | yes |

Electrical properties


| | |
|---|-----------------------|
| Transmission medium | Copper |
| Transmission speed | 100 Mbps |
| Transmission characteristics (category) | CAT5 (IEC 11801:2002) |
| Transmission speed | 100 Mbps |
| Wave impedance | 100 Ω |

Material specifications

| | |
|------------------------|--------------------------|
| Outer sheath, material | PVC |
| Conductor material | Tin-plated Cu litz wires |

Connector

Connection 1

| | |
|-----------------------------|---|
| Dimensional drawing |  <p>Connector pin assignment plug RJ45</p> |
| Type | RJ45 Plug, straight |
| Signal type/category | PROFINET CAT5 (IEC 11801), 100 Mbps EtherCAT® CAT5 (IEC 11801) |
| Insertion/withdrawal cycles | ≥ 750 |
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Overvoltage category | I |
| Degree of pollution | 2 |
| Material Contact | CuSn |
| Material Contact surface | Ni/Au |
| Material Contact carrier | PC |
| Material Housing | PA-GF |
| Color (Housing) | gray |

VS-PPC/ME-PPC/ME-93B-LI/5,0 - Network cable




1416165

<https://www.phoenixcontact.com/us/products/1416165>

| | |
|--|------------------|
| Flammability rating according to UL 94 | V2 |
| Degree of protection | IP20 |
| Ambient temperature (operation) | -40 °C ... 70 °C |


Connection 2

| | |
|--|---|
| Dimensional drawing |  <p>Connector pin assignment plug RJ45</p> |
| Type | RJ45 Plug, straight |
| Signal type/category | PROFINET CAT5 (IEC 11801), 100 Mbps EtherCAT® CAT5 (IEC 11801) |
| Insertion/withdrawal cycles | ≥ 750 |
| Insulation resistance | ≥ 100 MΩ |
| Overvoltage category | I |
| Degree of pollution | 2 |
| Material Contact | CuSn |
| Material Contact surface | Ni/Au |
| Material Contact carrier | PC |
| Material Housing | PA-GF |
| Color (Housing) | gray |
| Flammability rating according to UL 94 | V2 |
| Degree of protection | IP20 |
| Ambient temperature (operation) | -40 °C ... 70 °C |

Cable/line

| | |
|--------------|--------|
| Cable length | 5.00 m |
|--------------|--------|

PROFINET PVC stranded CAT5 [93B]

| | |
|---------------------|--|
| Dimensional drawing |  |
| UL AWM Style | 21695 (80 °C / 600 V) |
| Number of positions | 4 |
| Shielded | yes |

VS-PPC/ME-PPC/ME-93B-LI/5,0 - Network cable



1416165

<https://www.phoenixcontact.com/us/products/1416165>

| | |
|---|--|
| Cable type | PROFINET PVC stranded CAT5 [93B] |
| Conductor structure | 1x4xAWG22/7, SF/TQ |
| AWG signal line | 22 |
| Conductor cross-section | 4x 0.34 mm ² |
| Wire diameter incl. insulation | 1.5 mm ±0.1 mm |
| External cable diameter | 6.50 mm ±0.2 mm |
| Outer sheath, material | PVC |
| External sheath, color | green RAL 6018 |
| Conductor material | Tin-plated Cu litz wires |
| Material wire insulation | PE |
| Single wire, color | white, yellow, blue, orange |
| Overall twist | Star quad |
| Optical shield covering | 85 % |
| Insulation resistance | ≥ 5 GΩ*km |
| Loop resistance | ≤ 120.00 Ω/km |
| Wave impedance | 100 Ω ±5 Ω (at 100 MHz) |
| Nominal voltage, cable | ≤ 600 V |
| Test voltage Core/Core | 2000 V ((50 Hz/1 min)) |
| Test voltage Core/Shield | 2000.00 V ((50 Hz/1 min)) |
| Minimum bending radius, fixed installation | 4 x D |
| Minimum bending radius, flexible installation | 8 x D |
| Flame resistance | UL 1581, Section 1060 and UL 2556, Section 9.3 (FT1) UL 1685 (CSA FT 4) UL 1581, Section 1100 and UL 2556, Section 9.1 (HFT/FT2) |
| Resistance to oil | OIL RES I according to UL 2256 |
| Other resistance | UV resistant (according to UL 1581, Section 1200) |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) -10 °C ... 70 °C (Cable, flexible installation) |

Standards and regulations

| | |
|--------------------------|---------------------|
| Standards/specifications | IEC PAS 61076-3-117 |
|--------------------------|---------------------|

VS-PPC/ME-PPC/ME-93B-LI/5,0 - Network cable

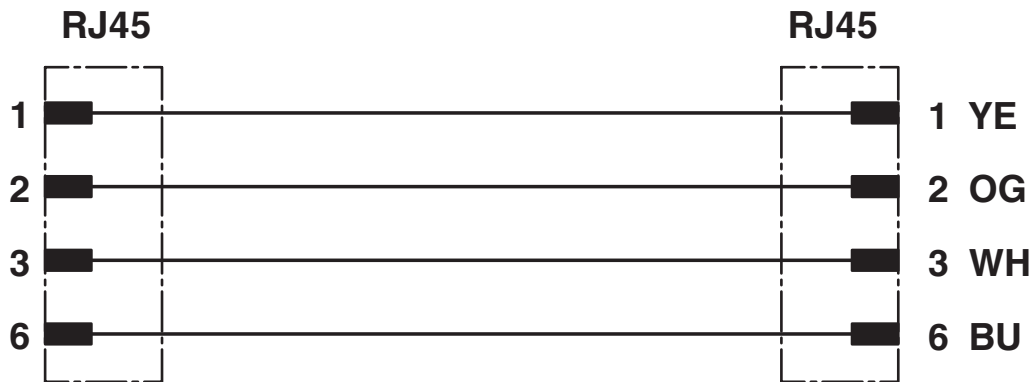


1416165

<https://www.phoenixcontact.com/us/products/1416165>

Drawings

Circuit diagram



VS-PPC/ME-PPC/ME-93B-LI/5,0 - Network cable



1416165

<https://www.phoenixcontact.com/us/products/1416165>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1416165>



EAC

Approval ID: 19060508

VS-PPC/ME-PPC/ME-93B-LI/5,0 - Network cable



1416165

<https://www.phoenixcontact.com/us/products/1416165>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27060307 |
| ECLASS-15.0 | 27060307 |

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

VS-PPC/ME-PPC/ME-93B-LI/5,0 - Network cable



1416165

<https://www.phoenixcontact.com/us/products/1416165>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|---|
| REACH candidate substance (CAS No.) | 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol(CAS: 119-47-1) 2-(2H-benzotriazol-2-yl)-4-(1,1,3,3-tetramethylbutyl)phenol (UV-329)(CAS: 3147-75-9) |
| SCIP | 384d79d2-0071-42d0-9b70-b50d20807996 |

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com