

SAC-5PH-M-F/2XF SH1 SCO - H distributor



1417414

<https://www.phoenixcontact.com/us/products/1417414>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



H distributor, 5-position, shielded, Plug straight M12, coding: A, on Socket straight M12, coding: A and Socket straight M12, coding: A, Thread M12 not rotatable, Parallel distributor

Your advantages

- Safe use in the field, thanks to a high degree of protection
- Reliable signal transmission – 360° shielding in environments with electromagnetic interference

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1417414 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | BF10 |
| Product key | AF1GAC |
| GTIN | 4046356525138 |
| Weight per piece (including packing) | 60 g |
| Weight per piece (excluding packing) | 60 g |
| Customs tariff number | 85366990 |
| Country of origin | PL |

SAC-5PH-M-F/2XF SH1 SCO - H distributor



1417414

<https://www.phoenixcontact.com/us/products/1417414>

Technical data

Product properties

| | |
|----------------------|---------------|
| Product type | H-distributor |
| Number of positions | 5 |
| No. of cable outlets | 3 |
| Shielded | yes |
| Coding | A |
| Thread type | M12 |

Insulation characteristics

| | |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution | 3 |

Electrical properties

| | |
|-----------------------|----------------------------|
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage U_N | 48 V AC |
| | 60 V DC |
| Nominal current I_N | 4 A |

Signaling

| | |
|------------------------|----|
| Status display | no |
| Status display present | no |

Dimensions

| | |
|---------------------|--|
| Dimensional drawing |  |
| Width | 39 mm |
| Height | 16 mm |
| Length | 58.8 mm |
| Center distance | 21 mm |

Material specifications

| | |
|--|---|
| Flammability rating according to UL 94 | V0 |
| Seal material | NBR |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Contact material | CuZn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material for screw connection | Zinc die-cast, nickel-plated |

SAC-5PH-M-F/2XF SH1 SCO - H distributor



1417414

<https://www.phoenixcontact.com/us/products/1417414>

Connector

Connection 1

| | |
|-------------|-------------------|
| Type | Plug straight M12 |
| Coding type | A |

Connection 2

| | |
|-------------|---------------------|
| Type | Socket straight M12 |
| Coding type | A |

Connection 3

| | |
|-------------|---------------------|
| Type | Socket straight M12 |
| Coding type | A |

Mechanical properties

Mechanical data

| | |
|-----------------------------|-------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|-------|

Environmental and real-life conditions

Ambient conditions

| | |
|---|----------------------------------|
| Degree of protection | IP65 |
| | IP67 |
| Ambient temperature (operation) (male connector/female connector) | -25 °C ... 90 °C (Plug / socket) |

Standards and regulations


| | |
|--------------------------|-----------------|
| Standard designation | M12 connector |
| Standards/specifications | IEC 61076-2-101 |

SAC-5PH-M-F/2XF SH1 SCO - H distributor

1417414


<https://www.phoenixcontact.com/us/products/1417414>

Drawings

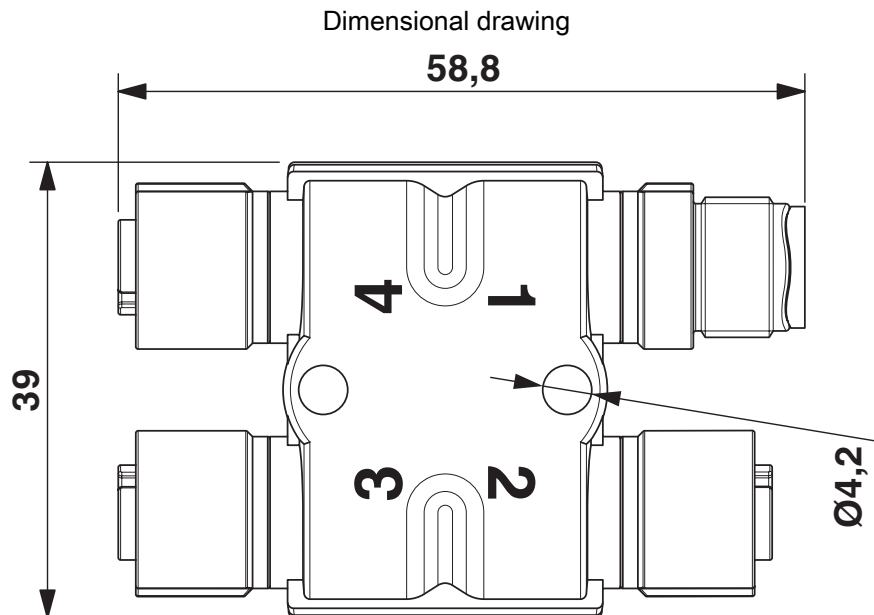

H distributor dimensional drawing

Schematic diagram

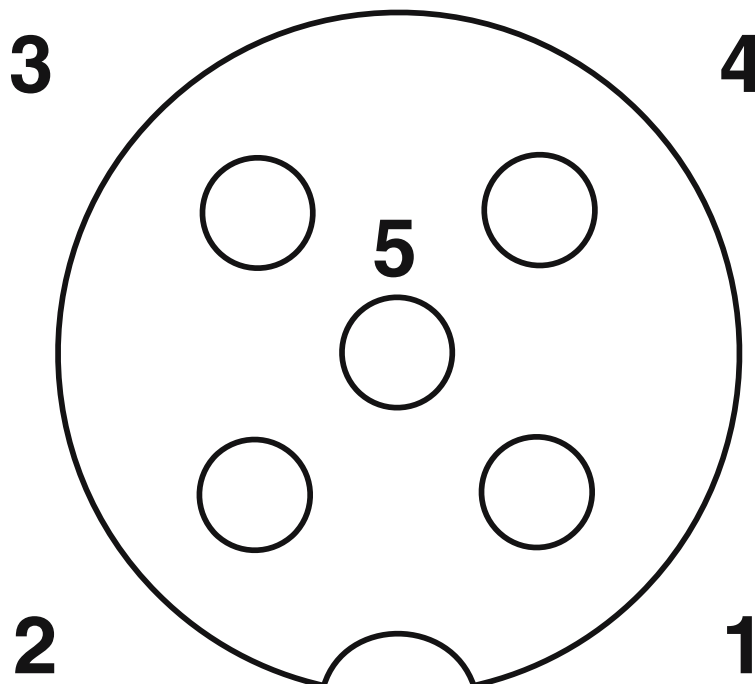

Pin assignment M12 socket, 5-pos., A-coded, socket side view


SAC-5PH-M-F/2XF SH1 SCO - H distributor



1417414


<https://www.phoenixcontact.com/us/products/1417414>

Schematic diagram

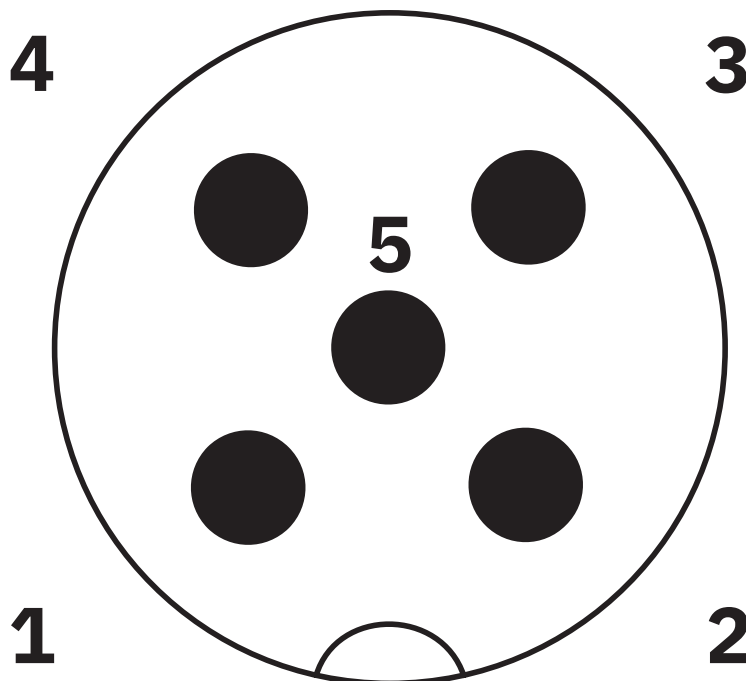

Pin assignment M12 male connector, 5-pos., A-coded, male side

Circuit diagram

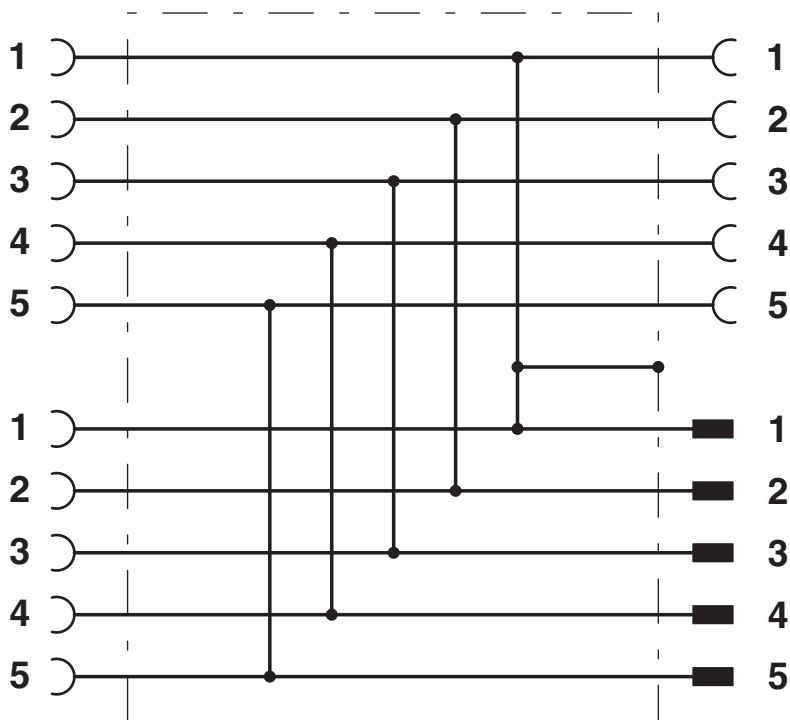

Contact assignment of the M12 H distributor

SAC-5PH-M-F/2XF SH1 SCO - H distributor



1417414

<https://www.phoenixcontact.com/us/products/1417414>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27440106 |
| ECLASS-15.0 | 27440106 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC002925 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 31251500 |
|-------------|----------|

SAC-5PH-M-F/2XF SH1 SCO - H distributor



1417414

<https://www.phoenixcontact.com/us/products/1417414>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

EF3.1 Climate Change

| | |
|---------|---------------|
| CO2e kg | 3.872 kg CO2e |
|---------|---------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com