

# HC-STA-B24-HHFD-BLANK-EL-AL - Housing



1420011

<https://www.phoenixcontact.com/us/products/1420011>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sleeve housing B24, for double locking latch, material: Die-cast aluminum, salt water resistant, variable, height: 76 mm, cable gland: none, Standard, Without thread opening for screw connection

## Product description

Sleeve housing, without screw thread

## Your advantages

- Good shielding in the event of electromagnetic interference

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1420011       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | BF56          |
| Product key                          | AF7APB        |
| GTIN                                 | 4055626201375 |
| Weight per piece (including packing) | 295.7 g       |
| Weight per piece (excluding packing) | 295.1 g       |
| Customs tariff number                | 85389099      |
| Country of origin                    | CN            |

# HC-STA-B24-HHFD-BLANK-EL-AL - Housing



1420011

<https://www.phoenixcontact.com/us/products/1420011>

## Technical data


### Notes

|         |  |
|---------|--|
| General | for contact inserts HC-B24, BB46, D64, DD108, HV10/16, M |
|---------|--|

### Product properties

|                     |                            |
|---------------------|----------------------------|
| Product type        | Housing with locking latch |
| Housing type        | Sleeve housing             |
| Application         | Standard                   |
| Type                | B24                        |
| Cable outlet        | variable                   |
| Pg screw connection | none                       |

### Dimensions

|                     |   |
|---------------------|---|
| Dimensional drawing |  |
| Width               | 44 mm   |
| Height              | 76 mm   |
| Length              | 120 mm  |

### Material specifications

|                          |   |
|--------------------------|---|
| Housing material         | Die-cast aluminum, salt water resistant |
| Housing surface material | uncoated                                |

### Mechanical properties

#### Mechanical data

|              |     |
|--------------|-----|
| Locking type | Pin |
|--------------|-----|

### Environmental and real-life conditions

#### Ambient conditions

|                                 |                   |
|---------------------------------|-------------------|
| Degree of protection            | IP66              |
|                                 | IP67              |
| Enclosure rating (NEMA)         | 4 (UL 50e)        |
|                                 | 4X (UL 50e)       |
|                                 | 12 (UL 50e)       |
| Impact strength                 | IK09              |
| Ambient temperature (operation) | -40 °C ... 125 °C |

# HC-STA-B24-HHFD-BLANK-EL-AL - Housing




1420011

<https://www.phoenixcontact.com/us/products/1420011>

## Drawings

Dimensional drawing

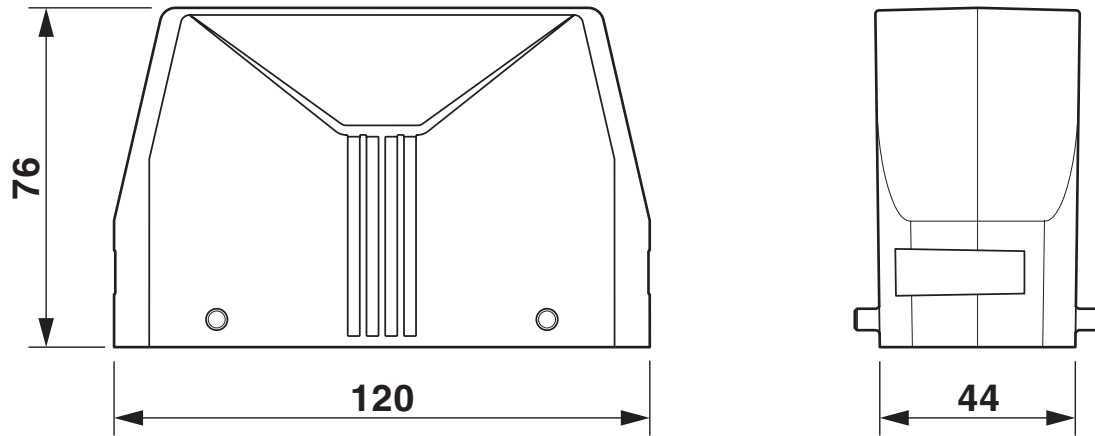

Dimensional drawing

# HC-STA-B24-HHFD-BLANK-EL-AL - Housing



1420011

<https://www.phoenixcontact.com/us/products/1420011>

## Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1420011>

**DNV**

Approval ID: TAE000037S



**EAC**

Approval ID: RU C-DE.AI30.B.01102

# HC-STA-B24-HHFD-BLANK-EL-AL - Housing



1420011

<https://www.phoenixcontact.com/us/products/1420011>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27440202 |
| ECLASS-15.0 | 27440202 |

### ETIM

|           |          |
|-----------|----------|
| ETIM 10.0 | EC000437 |
|-----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 31261500 |
|-------------|----------|

1420011

<https://www.phoenixcontact.com/us/products/1420011>

## Environmental product compliance

### EU RoHS

|   |                    |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

### China RoHS

|  |  |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E                                   |
|  | No hazardous substances above the limits |

### EU REACH SVHC

|                                     |                            |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

### EF3.1 Climate Change

|         |              |
|---------|--------------|
| CO2e kg | 4.86 kg CO2e |
|---------|--------------|

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)