

# VS-EC-MSDB SH SCO - Device connector front mounting

1440711

<https://www.phoenixcontact.com/us/products/1440711>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, 4-position, Mini-B USB socket, straight, M12-SPEEDCON, Wave soldering, this item is expected to be lead-free from Q2 2026 in accordance with RoHS II without exception 6c (Pb < 0.1%), a lead-free alternative is possible on request in advance

## Your advantages

- Easy PCB assembly: one-piece connectors for wave soldering
- For high transmission reliability: optional shield connection to the housing by means of shield contact
- SPEEDCON fast locking system reduces cabling times

## Commercial data

Item number	1440711
Packing unit	20 pc
Minimum order quantity	20 pc
Sales key	AB27
Product key	ABQSAI
GTIN	4046356554053
Weight per piece (including packing)	11 g
Weight per piece (excluding packing)	10.117 g
Customs tariff number	85366990
Country of origin	DE

# VS-EC-MSDB SH SCO - Device connector front mounting



1440711

<https://www.phoenixcontact.com/us/products/1440711>

## Technical data

### Mounting

Mounting type	Front mounting (M12 x 1, with locking nut)
---------------	--------------------------------------------

### Product properties

Product type	Circular connectors (device side)
Number of positions	4
Shielded	yes
Thread type	M12

### Material specifications

Material Housing	GD-Zn
Material Housing surface	Ni
Material Contact	Cu alloy
Material Contact surface	Au
Flammability rating according to UL 94	V0

### Electrical properties

Nominal voltage $U_N$	30 V
Nominal current $I_N$	1 A
Transmission characteristics (category)	CAT7, for USB 2.0 (480 Mbps)

### Connection data

#### Conductor connection

Connection method	Wave soldering
Contact connection type	Socket

### Mechanical properties

#### Mechanical data

Insertion/withdrawal cycles	$\geq 100$
-----------------------------	------------

### Connector

#### Connection 1

Head design	Mini-B USB socket
Head cable outlet	straight
Head thread type	M12
Head locking type	SPEEDCON

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP67
----------------------	------

# VS-EC-MSDB SH SCO - Device connector front mounting



1440711

<https://www.phoenixcontact.com/us/products/1440711>

Ambient temperature (operation) (male connector/female connector)	-25 °C ... 85 °C
UL Type Rating	Type 4 (indoor use only)


# VS-EC-MSDB SH SCO - Device connector front mounting

1440711

<https://www.phoenixcontact.com/us/products/1440711>

## Drawings

Schematic diagram

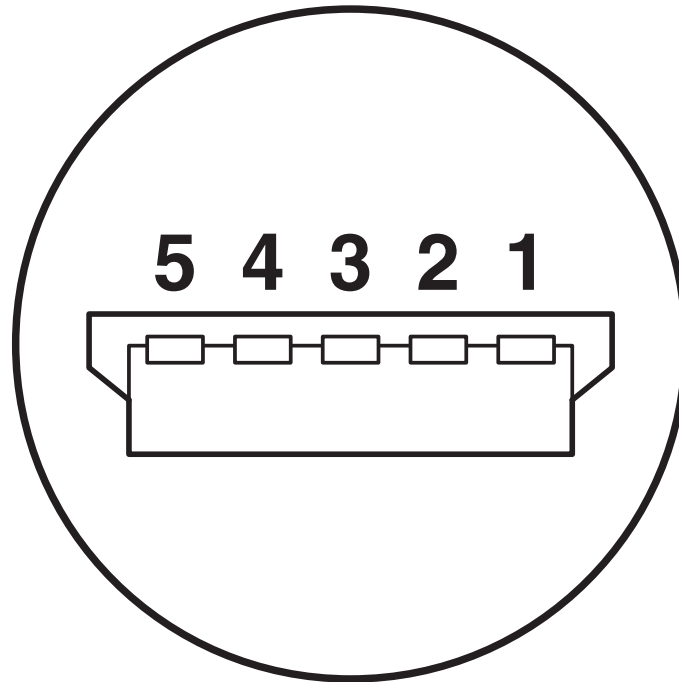

Connector pin assignment

# VS-EC-MSDB SH SCO - Device connector front mounting



1440711

<https://www.phoenixcontact.com/us/products/1440711>

## Classifications

### ECLASS

ECLASS-13.0	27440110
ECLASS-15.0	27440110

### ETIM

ETIM 10.0	EC003568
-----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# VS-EC-MSDB SH SCO - Device connector front mounting



1440711

<https://www.phoenixcontact.com/us/products/1440711>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
-----------------------------------------	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)