

# SACC-M 8MS-4QO-0,5-M - Connector



1441037

<https://www.phoenixcontact.com/us/products/1441037>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Connector, Universal, 4-position, Plug straight M8, coding: A, Insulation displacement connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 2.5 mm ... 5 mm

## Your advantages

- Safe use in the field, thanks to a high degree of protection
- Insulation displacement connection: innovative and time-saving assembly without stripping the single wire

## Commercial data

Item number	1441037
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF31
Product key	AF2BCA
GTIN	4046356515924
Weight per piece (including packing)	8.3 g
Weight per piece (excluding packing)	8.3 g
Customs tariff number	85366990
Country of origin	DE

# SACC-M 8MS-4QO-0,5-M - Connector

1441037

<https://www.phoenixcontact.com/us/products/1441037>

## Technical data

### Notes

Assembly note	<b>NOTE:</b> Observe the permissible bending radii when routing cables, since the degree of protection may be at risk if the bending forces are too high. Reduce mechanical loads upstream of the connector, e.g., by using cable ties.
---------------	---


### Product properties

Product type	Circular connector (cable-side)
Sensor type	Universal
Number of positions	4
No. of cable outlets	1
Shielded	no
Coding	A
Cable outlet	straight

### Insulation characteristics

Overvoltage category	II
Degree of pollution	3

### Dimensions

Dimensional drawing	
Length	43.4 mm

### External dimensions

Outside diameter	2.5 mm ... 5 mm ±0.2 mm
------------------	-------------------------

### Housing

Diameter housing	12.5 mm
------------------	---------

### Material specifications

Flammability rating according to UL 94	HB
Seal material	NBR
Material of grip body	PA 6
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material for screw connection	Zinc die-cast, nickel-plated
Wire insulation material	PVC / PE / PP / rubber

# SACC-M 8MS-4QO-0,5-M - Connector



1441037

<https://www.phoenixcontact.com/us/products/1441037>

## Connection data

### Conductor connection

Connection method	Insulation displacement connection
Connection cross section	0.25 mm <sup>2</sup> ... 0.5 mm <sup>2</sup>
Connection cross section AWG	24 ... 20
Tightening torque	0.6 Nm (Pressure nut) 0.2 Nm (M8 knurl)

### Connection assignment

Contact   Color (signal designation)   Contact (optional)	1 = BN
	2 = WH
	3 = BU
	4 = BK

## Electrical properties

Rated surge voltage	0.8 kV
Contact resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U <sub>N</sub>	30 V AC 30 V DC
Nominal current I <sub>N</sub>	4 A

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	≥ 100
-----------------------------	-------

## Connector

### Connection 1

Head design	Plug
Head cable outlet	straight
Head thread type	M8
Coding	A

## Cable/line

Signal type/category	Universal
External cable diameter	2.5 mm ... 5 mm

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP65 IP67
Ambient temperature (operation) (male connector/female connector)	-25 °C ... 80 °C (Plug / socket)

# SACC-M 8MS-4QO-0,5-M - Connector



1441037

<https://www.phoenixcontact.com/us/products/1441037>

## Standards and regulations

M8

Standard designation	M8 connector
Standards/specifications	IEC 61076-2-104


# SACC-M 8MS-4QO-0,5-M - Connector

1441037

<https://www.phoenixcontact.com/us/products/1441037>


## Drawings

Dimensional drawing

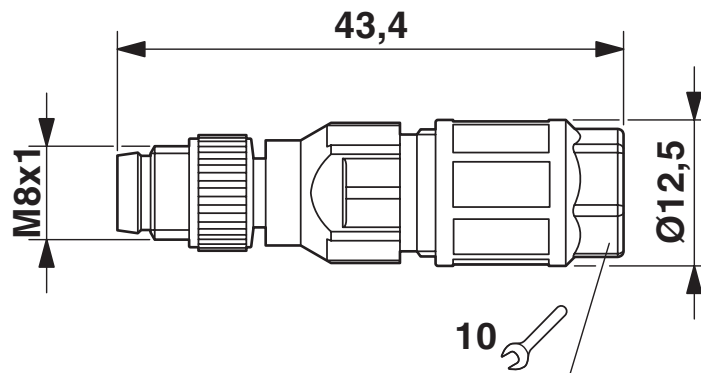

M8 x 1 male plug, straight version

Functional drawing

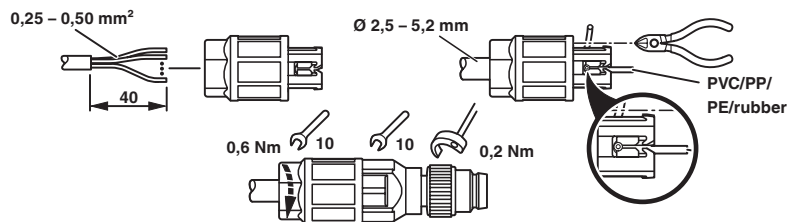

# SACC-M 8MS-4QO-0,5-M - Connector

1441037

<https://www.phoenixcontact.com/us/products/1441037>



Schematic diagram



Pin assignment M8 plug, 4-pos., view male side

# SACC-M 8MS-4QO-0,5-M - Connector





1441037

<https://www.phoenixcontact.com/us/products/1441037>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1441037>

 <b>cUL Recognized</b> Approval ID: E118976				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
keine				
	29 V	4 A	24 - 20	-

 <b>UL Recognized</b> Approval ID: E118976				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
keine				
	29 V	4 A	24 - 20	-

 <b>EAC</b> Approval ID: RU C-DE.AI30.B.01102	
---	--

# SACC-M 8MS-4QO-0,5-M - Connector



1441037

<https://www.phoenixcontact.com/us/products/1441037>

## Classifications

### ECLASS

ECLASS-13.0	27440116
ECLASS-15.0	27440116

### ETIM

ETIM 10.0	EC002635
-----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# SACC-M 8MS-4QO-0,5-M - Connector



1441037

<https://www.phoenixcontact.com/us/products/1441037>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

### EF3.1 Climate Change

CO2e kg	1.307 kg CO2e
---------	---------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)