

CBC-PRC 3-FT25-MS6 800V - Panel feed-through



1453451

<https://www.phoenixcontact.com/us/products/1453451>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Panel feed-through, Range of articles: ArcZero, color: black, number of positions: 3, min. conductor cross-section: 1.5 mm², max. conductor cross-section: 6 mm², rated voltage: 800 VDC, rated current: 20 A, Connection method: Screw connection, Maximum load when disconnecting: 16 kW, scope: DC grid

Your advantages

- Safe connection and disconnection under load
- Fast disconnection of flying leads
- Time-saving maintenance or replacement of connected devices
- Robust outdoor design even for extreme conditions
- Particularly durable and economical

Commercial data

Item number	1453451
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB03
Product key	ABLFAA
GTIN	4063151841713
Weight per piece (including packing)	65.4 g
Weight per piece (excluding packing)	52.887 g
Customs tariff number	85366990
Country of origin	DE

1453451

<https://www.phoenixcontact.com/us/products/1453451>

Technical data

Notes

Note on application	Maximum load when disconnecting: 16 kW (6,7 μ F/5 mH)
Note on application	Maximum load when connecting: 2 kW (6,7 μ F/5 mH)
Note on application	Observe the specifications of the packing slip.
Notes on safety	Fit the protective cap when not plugged in.


Product properties

Product type	Panel feed-through
Product family	ArcZero
Area of application	DC grid
Number of positions	3

Insulation characteristics

Protection class	II (plastic housing)
------------------	----------------------

Dimensions

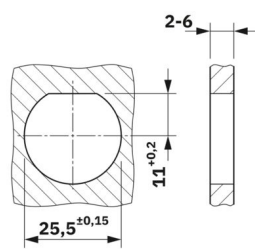Dimensional drawing	
Width	35 mm
Height	35 mm
Length	72.6 mm

Electrical properties

Rated voltage	800 VDC (III/2.00) in accordance with IEC 61984
	250 VDC Minimum system voltage
	500 VDC (III/2.00) in accordance with IEC 61535
	600 VDC (III/2.00) in accordance with UL 2238 / UL 2237
Rated current	20 A (With 2.5 mm ² conductor cross-section in accordance with IEC 61984)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	500 (under rated load)
-----------------------------	------------------------

Material specifications

Color (Housing)	black (RAL 9005)
-----------------	------------------

CBC-PRC 3-FT25-MS6 800V - Panel feed-through



1453451

<https://www.phoenixcontact.com/us/products/1453451>

Material Housing	PPE
------------------	-----

Cable/line

Single wire, cross section	1.5 mm ² 6 mm ²
Stripping length of the individual wire	13 mm
Halogen-free	yes (in accordance with IEC 61249-2-21:2003- 11 Cl.3.1)

Mounting

Mounting type	Rear mounting
Thread type	M25 x 1,5 ()

Environmental and real-life conditions

Ambient conditions


Degree of protection	IP66
	IP68 (2 m / 2 h)
	IP69
Ambient temperature (operation)	-40 °C ... 105 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 105 °C
Ambient temperature (assembly)	-20 °C ... 60 °C

Standards and regulations

Standards/specifications	IEC 61984
	IEC TS 62735-1


Drawings

Dimensional drawing

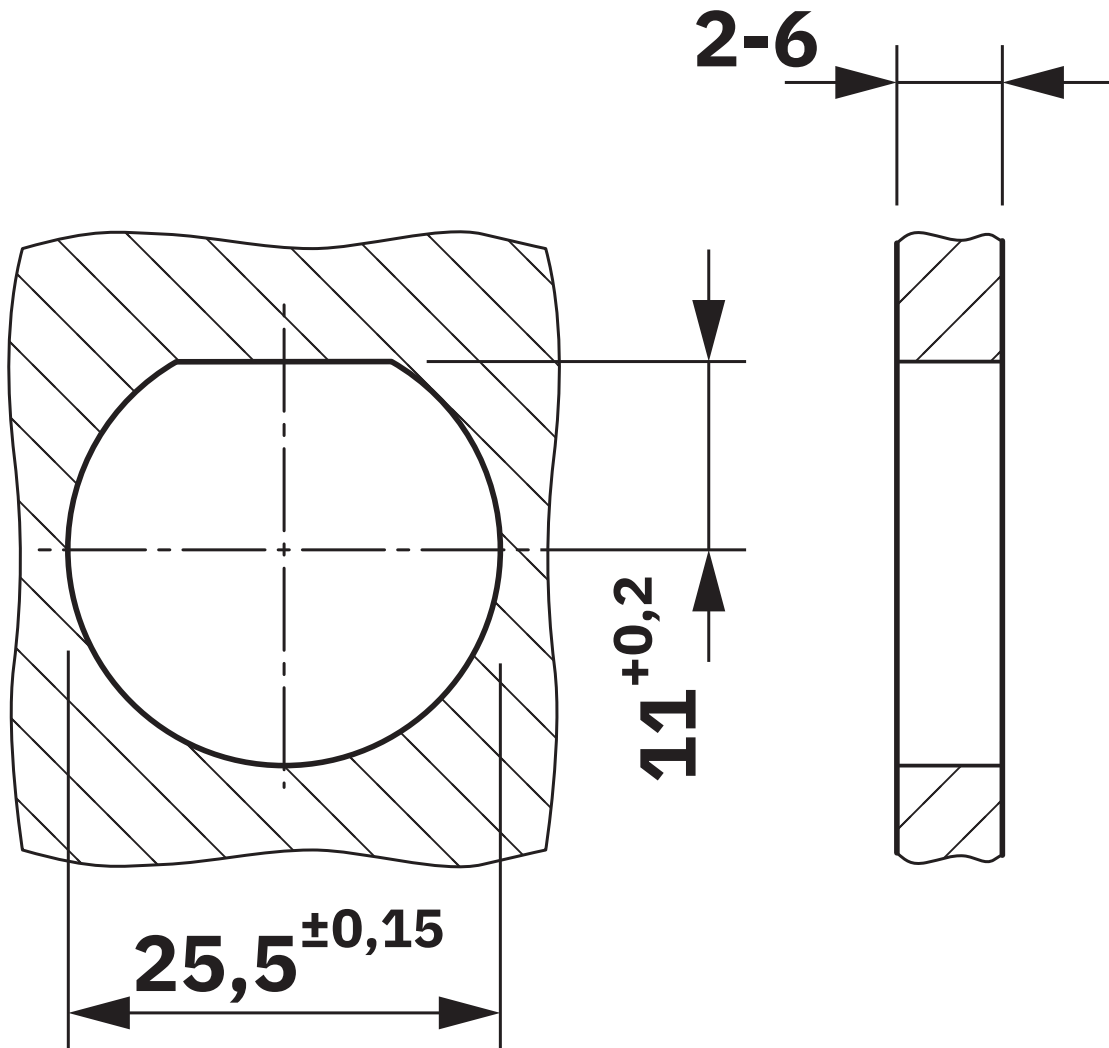

1453451

<https://www.phoenixcontact.com/us/products/1453451>

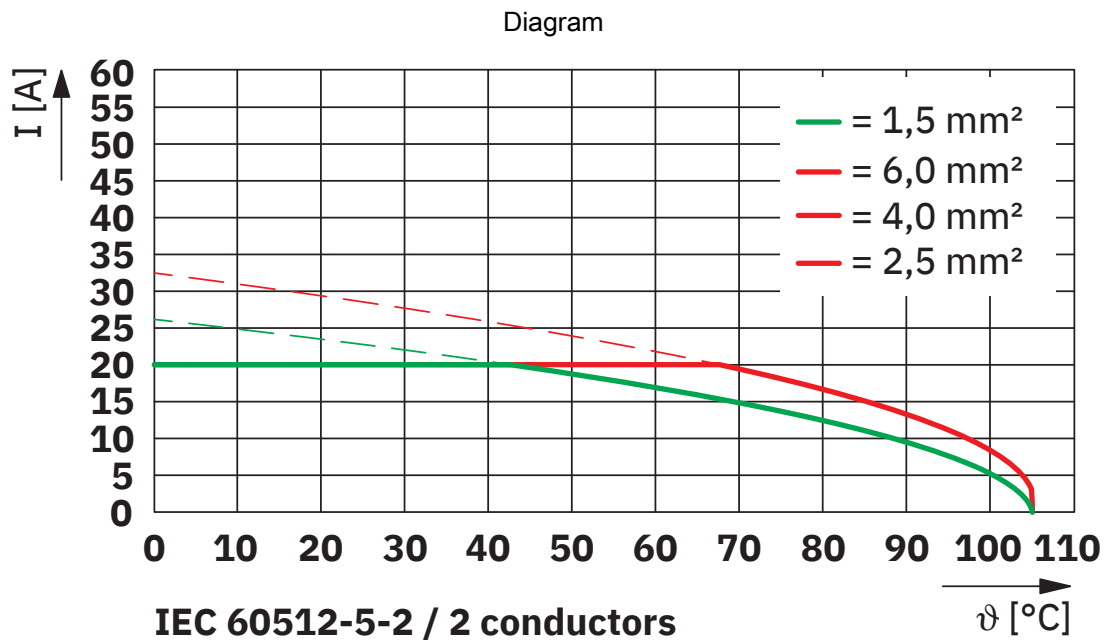

Derating

CBC-PRC 3-FT25-MS6 800V - Panel feed-through




1453451

<https://www.phoenixcontact.com/us/products/1453451>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1453451>

 VDE Zeichengenehmigung Approval ID: 304284-TL3-1				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
	800 V	20 A	-	1.5 - 6

CBC-PRC 3-FT25-MS6 800V - Panel feed-through



1453451

<https://www.phoenixcontact.com/us/products/1453451>

Classifications

ECLASS

ECLASS-13.0	27440602
ECLASS-15.0	27440602

ETIM

ETIM 10.0	EC002566
-----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

CBC-PRC 3-FT25-MS6 800V - Panel feed-through



1453451

<https://www.phoenixcontact.com/us/products/1453451>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	Triphenyl phosphate(CAS: 115-86-6)
-------------------------------------	------------------------------------

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com