

# FLT-MB-T1-264/25-3+0-UT-R - Type 1+2+3 combined lightning current and surge arresters



1461302

<https://www.phoenixcontact.com/us/products/1461302>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Compact, non-pluggable lightning current/surge arrester free of leakage current based on wear-free carbon spark gap technology for 3-phase power supply networks with common N and PE (4-conductor system: L1, L2, L3, PEN), suitable for use in the unmetered area, discharge capacity of up to 100 kA for lightning protection levels I and II, with remote signaling.

## Your advantages

- Safe operation and maximum system availability, thanks to reliable protection in the event of lightning current and surge voltages using innovative high-performance spark gap technology
- Maximum performance in the smallest installation space for all common power supply systems
- Suitable for use in the unmetered area, thanks to a protective circuit free of leakage current, and to a mechanical visual status indicator
- Space-saving and inexpensive installation, thanks to the slim overall width
- Informed at all times about the function of the protective effect, thanks to clear green/red indicator and optional remote indication contact

## Commercial data

Item number	1461302
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	CL11D2
GTIN	4063151853242
Weight per piece (including packing)	524.7 g
Weight per piece (excluding packing)	485 g
Country of origin	CN

# FLT-MB-T1-264/25-3+0-UT-R - Type 1+2+3 combined lightning current and surge arresters



1461302

<https://www.phoenixcontact.com/us/products/1461302>

## Technical data

### Product properties

Product type	Combination type
IEC test classification	I + II + III
	T1 + T2 + T3
EN type	T1 + T2 + T3
IEC power supply system	TN-C
Type	DIN rail module, one-piece
Number of positions	4
Surge protection fault message	Optical, remote indicator contact
Number of ports	One

### Insulation characteristics

Overvoltage category	IV (main circuit)
	II (Auxiliary circuit)
Pollution degree	2

### Electrical properties

Nominal frequency $f_N$	50 Hz (60 Hz)
-------------------------	---------------

### Indicator/remote signaling

Connection name	Remote fault indicator contact
Switching function	Changeover contact
Operating voltage	12 V AC ... 250 V AC
	125 V DC (200 mA DC)
Operating current	10 mA AC ... 0.5 A AC
	0.5 A DC (30 V DC)

### Connection data

Connection method	Screw connection
Screw thread	M5
Tightening torque	3 Nm (2,5 mm <sup>2</sup> ... 16 mm <sup>2</sup> )
	4.5 Nm (25 mm <sup>2</sup> ... 35 mm <sup>2</sup> )
Stripping length	18 mm
Conductor cross-section flexible	2.5 mm <sup>2</sup> ... 25 mm <sup>2</sup>
Conductor cross-section rigid	2.5 mm <sup>2</sup> ... 35 mm <sup>2</sup>
Conductor cross-section AWG	13 ... 2
Connection method	Fork-type cable lug
Conductor cross-section flexible	2.5 mm <sup>2</sup> ... 25 mm <sup>2</sup>

### Remote fault indicator contact

Connection method	Plug-in/screw connection via COMBICON
-------------------	---------------------------------------

# FLT-MB-T1-264/25-3+0-UT-R - Type 1+2+3 combined lightning current and surge arresters



1461302

<https://www.phoenixcontact.com/us/products/1461302>

Screw thread	M2
Tightening torque	0.5 Nm ... 0.6 Nm
Stripping length	7 mm
Conductor cross-section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section rigid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section AWG	24 ... 12

## Dimensions

Dimensional drawing	
Width	72 mm
Height	99.7 mm
Depth	76.6 mm (incl. DIN rail 7.5 mm)
Horizontal pitch	4 Div.

## Material specifications

Color	light gray (RAL 7035)
Flammability rating according to UL 94	V-0
CTI value of material	600
Insulating material	PBT
Material group	I
Housing material	PBT

## Mechanical properties

### Mechanical data

Open side panel	No
-----------------	----

## Protective circuit

Mode of protection	L-PEN
Nominal voltage $U_N$	240/415 V AC (TN-C)
Nominal frequency $f_N$	50 Hz (60 Hz)
Maximum continuous operating voltage $U_C$	264 V AC
Rated load current $I_L$	80 A (< 55 °C)
Protective conductor current $I_{PE}$	≤ 0.01 mA
Nominal discharge current $I_n$ (8/20) $\mu$ s	25 kA
Combination wave $U_{OC}$	6 kV
Impulse discharge current (10/350) $\mu$ s, charge	12.5 As
Impulse discharge current (10/350) $\mu$ s, specific energy	156 kJ/ $\Omega$
Impulse discharge current (10/350) $\mu$ s, peak value $I_{imp}$	25 kA
Total discharge current $I_{Total}$ (10/350) $\mu$ s	75 kA

# FLT-MB-T1-264/25-3+0-UT-R - Type 1+2+3 combined lightning current and surge arresters



1461302

<https://www.phoenixcontact.com/us/products/1461302>

Follow current interrupt rating $I_{fi}$	50 kA
Short-circuit current rating $I_{SCCR}$	50 kA
Voltage protection level $U_p$	$\leq 1.7$ kV
Residual voltage $U_{res}$	$\leq 1.7$ kV (at $I_n$ )
	$\leq 1.4$ kV (at 12.5 kA)
	$\leq 1.1$ kV (at 5 kA)
	$\leq 1.1$ kV (at 2.5 kA)
Front-of-wave sparkover voltage at 6 kV (1.2/50) $\mu$ s	$\leq 1.7$ kV
TOV behavior at $U_T$	457 V AC (5 s / withstand mode)
	457 V AC (120 min / withstand mode)
Response time $t_A$	$\leq 100$ ns
Max. backup fuse with V-type through wiring	80 A (gG)
Max. backup fuse with branch wiring	315 A (gG)

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20 (Installed)
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	$\leq 2000$ m (operating voltage remote contact $\leq 250$ V)
	$\leq 5000$ m (operating voltage remote contact $\leq 150$ V)
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	2g (Half-sine / 11 ms / 3x $\pm X$ , $\pm Y$ , $\pm Z$ )
Vibration (operation)	0,5g (9 ... 200 Hz / 2.5 h / X, Y, Z)

## Standards and regulations

Standards/specifications	IEC 61643-11
Note	2011
Standards/specifications	EN 61643-11
Note	2012

## Mounting

Mounting type	DIN rail: 35 mm
---------------	-----------------

# FLT-MB-T1-264/25-3+0-UT-R - Type 1+2+3 combined lightning current and surge arresters




1461302


<https://www.phoenixcontact.com/us/products/1461302>

## Drawings

Dimensional drawing

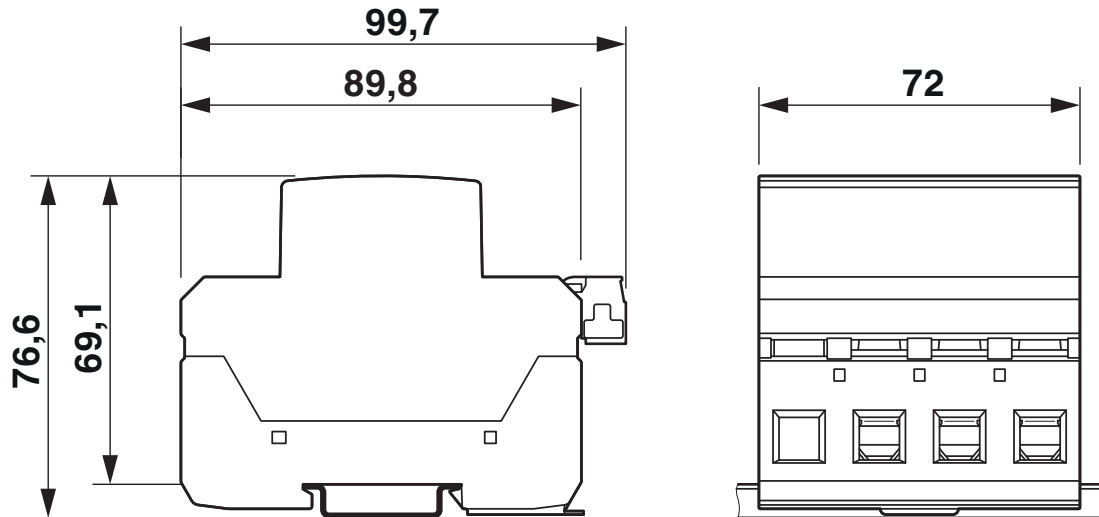

Circuit diagram

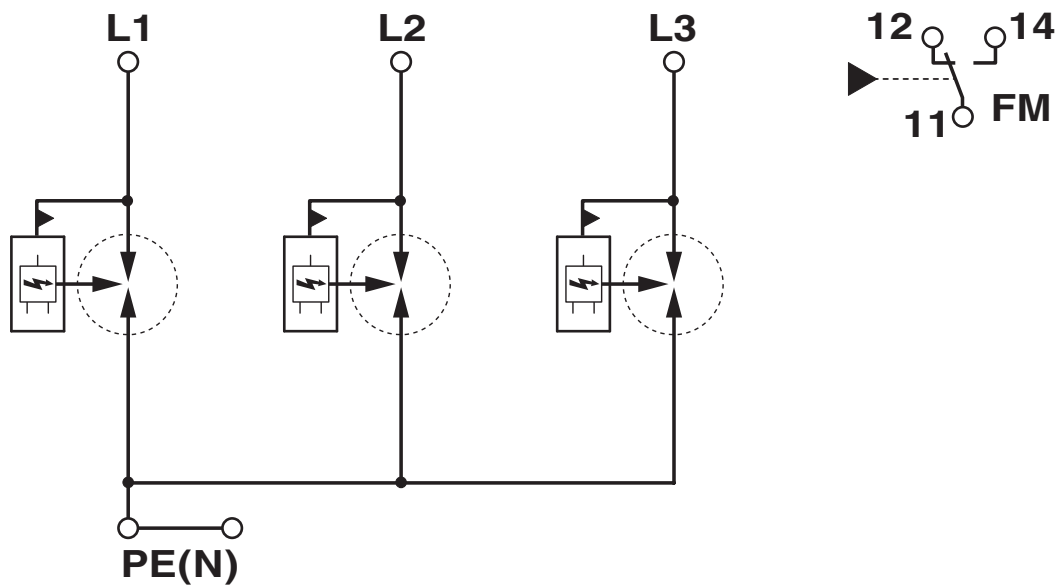

# FLT-MB-T1-264/25-3+0-UT-R - Type 1+2+3 combined lightning current and surge arresters



1461302

<https://www.phoenixcontact.com/us/products/1461302>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1461302>



**KEMA-KEUR**

Approval ID: 71-136866



**IECEE CB Scheme**

Approval ID: NL-109225

**CCA**

Approval ID: NTR NL-8051

# FLT-MB-T1-264/25-3+0-UT-R - Type 1+2+3 combined lightning current and surge arresters



1461302

<https://www.phoenixcontact.com/us/products/1461302>

## Classifications

### ECLASS

ECLASS-13.0	27171201
ECLASS-15.0	27171201

### ETIM

ETIM 10.0	EC000381
-----------	----------

### UNSPSC

UNSPSC 21.0	39121600
-------------	----------

# FLT-MB-T1-264/25-3+0-UT-R - Type 1+2+3 combined lightning current and surge arresters



1461302

<https://www.phoenixcontact.com/us/products/1461302>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)