

SACB-8/16-L-C GG SCO - Header



1516771

<https://www.phoenixcontact.com/us/products/1516771>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Header, application: Standard, extended requirements, connection method: M12 socket Metal, number of slots: 8, number of positions: 5, coding: A, slot assignment: Double, status display: yes, PNP; master cable connection: Pluggable screw connection, shielding: no

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1516771 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | BF42 |
| Product key | AF3CCD |
| GTIN | 4017918967505 |
| Weight per piece (including packing) | 313.8 g |
| Weight per piece (excluding packing) | 303 g |
| Customs tariff number | 85366990 |
| Country of origin | DE |

SACB-8/16-L-C GG SCO - Header



1516771

<https://www.phoenixcontact.com/us/products/1516771>

Technical data

Notes

| | |
|---------------------|---|
| Assembly note | NOTE: Observe the permissible bending radii when routing cables, since the degree of protection may be at risk if the bending forces are too high. Reduce mechanical loads upstream of the connector, e.g., by using cable ties. |
| Note on application | Unused slots are to be sealed off prior to commissioning. Suitable sealing elements are to be found under "Accessories". |

Product properties

| | |
|---------------------|--------------------------------------|
| Product type | Header with metric measurement slots |
| Application | Standard, extended requirements |
| Number of positions | 5 |
| Number of slots | 8 |
| Coding | A |
| LED | yes |

System properties

Local diagnostics

| | |
|------------------------|---------------------------|
| Monitored function | Supply voltage per module |
| Optical representation | Green LED |


Electrical properties

| | |
|---|-------------------------------------|
| Max. operating voltage U_{max} | 30 V DC |
| Local diagnostics | Supply voltage per module Green LED |
| | Status display I/O Yellow LED |
| Nominal voltage U_N | 24 V DC |
| Rated current, total | 10 A |
| | 2x 8 A (For electrical isolation) |
| Max. current carrying capacity per path | 2 A |
| Current carrying capacity per slot | 4 A |

Signaling

| | |
|------------------------|-----|
| Status display present | yes |
|------------------------|-----|

Dimensions

| | |
|---------------------|--|
| Dimensional drawing |  |
| Width | 58 mm |

SACB-8/16-L-C GG SCO - Header



1516771

<https://www.phoenixcontact.com/us/products/1516771>

| | |
|--------|--------|
| Height | 26 mm |
| Length | 153 mm |

Material specifications

| | |
|--|---------------|
| Material Threaded sleeve | Die-cast zinc |
| Material Housing | PBT |
| Material Molding compound | PUR |
| Flammability rating according to UL 94 | V0 |
| Seal material O-ring | NBR |
| Contact material | Cu alloy |
| Contact surface material | gold-plated |
| Contact carrier material | PA |
| Material of contact, master cable side | CU alloy |
| Material of the contact carrier on the master cable side | PA 6.6 V0 |
| Material of contact surface, master cable side | gold-plated |

Cable/line

| | |
|-------------------|----------------------------|
| Connection method | Pluggable screw connection |
|-------------------|----------------------------|

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|------------------|
| Degree of protection | IP65 |
| | IP67 |
| | IP69K |
| Ambient temperature (operation) | -30 °C ... 80 °C |

Standards and regulations

| | |
|--------------------------|-----------------|
| Standard designation | M12 connector |
| Standards/specifications | IEC 61076-2-101 |


SACB-8/16-L-C GG SCO - Header

1516771


<https://www.phoenixcontact.com/us/products/1516771>

Drawings

Dimensional drawing

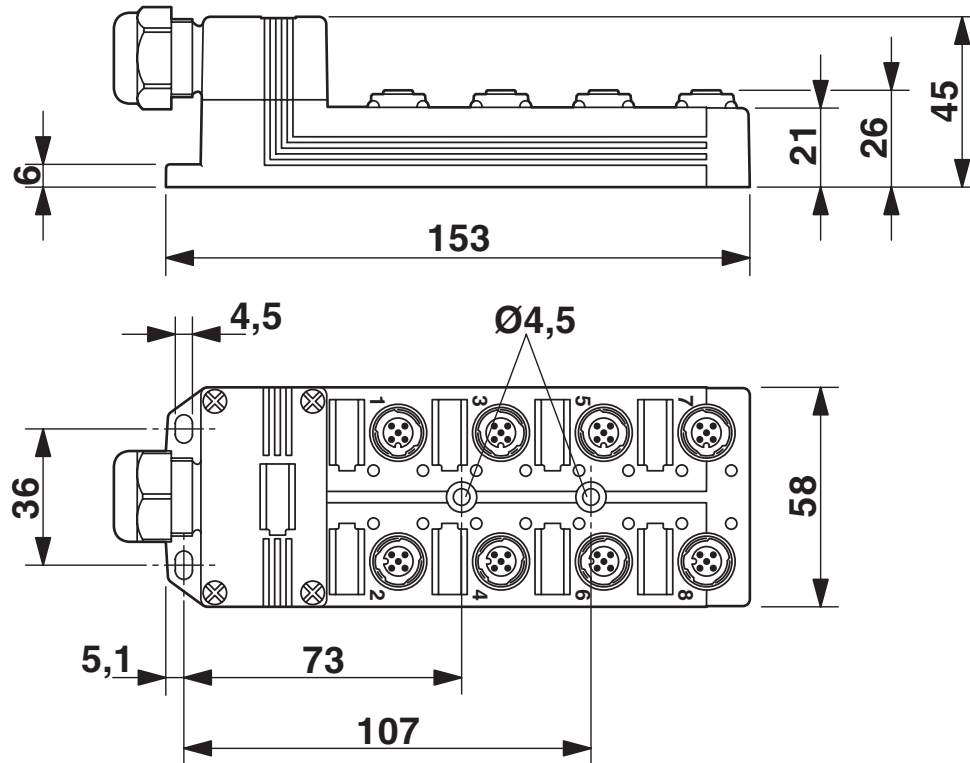

Schematic diagram

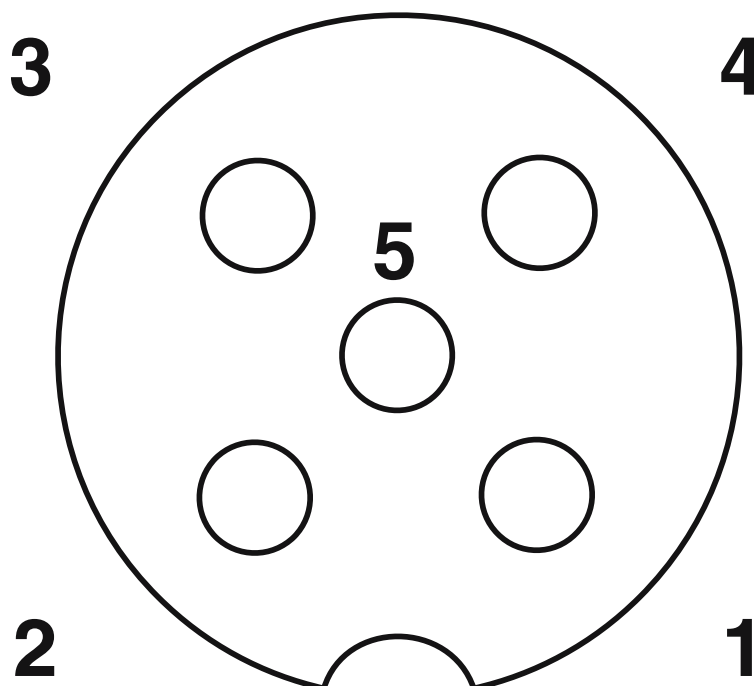

M12 slot, socket, 5-pos.


SACB-8/16-L-C GG SCO - Header

1516771

<https://www.phoenixcontact.com/us/products/1516771>



Schematic diagram

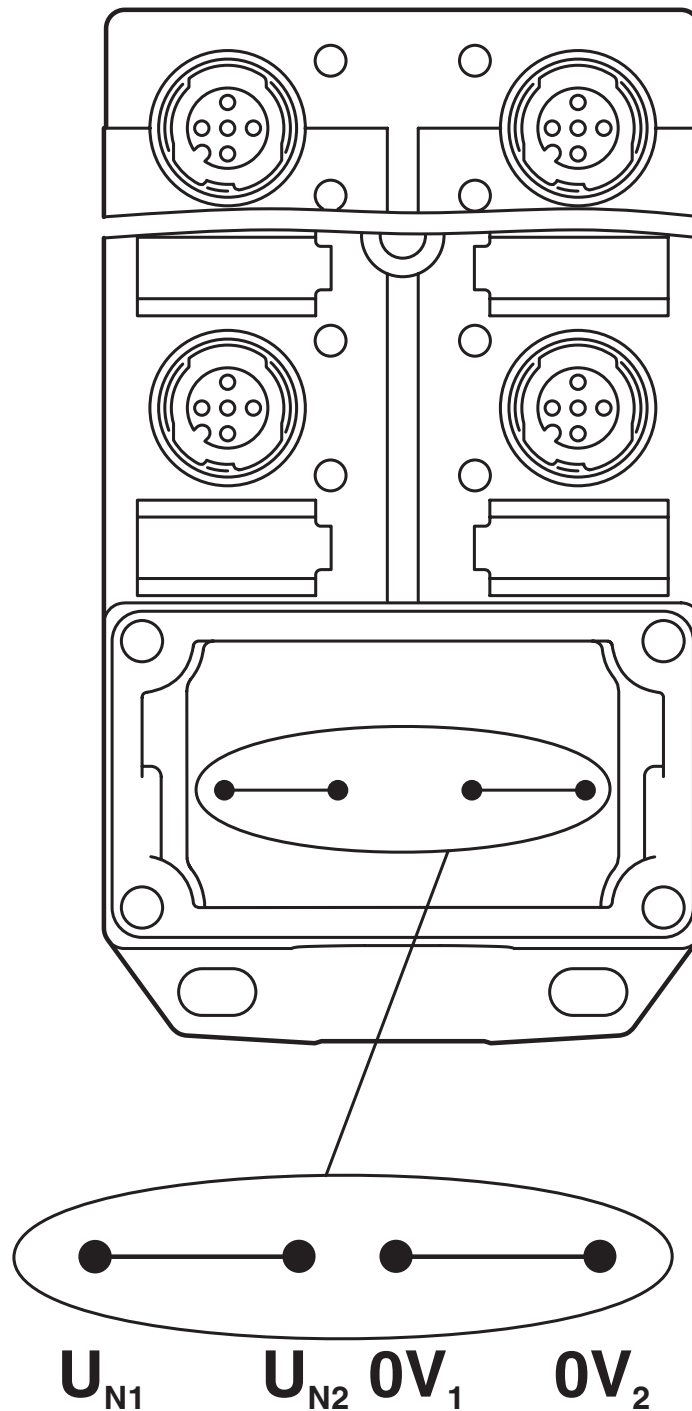

Potential U_{N1} and U_{N2} bridged. Potential assignment: $U_{N1} = U_{N2} =$ slots 1,2,3,4,5,6,7,8.

SACB-8/16-L-C GG SCO - Header

1516771

<https://www.phoenixcontact.com/us/products/1516771>



Schematic diagram



Electrically isolated. Potential assignment: U_{N1} = slots 1,3,5,7 and U_{N2} = slots 2,4,6,8.

SACB-8/16-L-C GG SCO - Header



1516771

<https://www.phoenixcontact.com/us/products/1516771>

Circuit diagram



SACB-8/16-L-C GG SCO - Header





1516771

<https://www.phoenixcontact.com/us/products/1516771>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1516771>

|  cUL Recognized Approval ID: E118976 | | | | |
|---|-----------------------|-----------------------|-------------------|----------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| keine | | | | |
| | 24 V | 3 A | - | - |

|  UL Recognized Approval ID: E118976 | | | | |
|--|-----------------------|-----------------------|-------------------|----------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| keine | | | | |
| | 24 V | 3 A | - | - |

SACB-8/16-L-C GG SCO - Header



1516771

<https://www.phoenixcontact.com/us/products/1516771>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27440111 |
| ECLASS-15.0 | 27440111 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC003558 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 31251500 |
|-------------|----------|

SACB-8/16-L-C GG SCO - Header



1516771

<https://www.phoenixcontact.com/us/products/1516771>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com