

WIL-SHM-P - Sensor

1533075

<https://www.phoenixcontact.com/us/products/1533075>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor for detecting vibrations, damage, and imbalances on the rotor blade of wind turbine generators, acceleration measurement in 2 axes, temperature measurement, IO-Link communication, tread-resistant, adhesive mounting. App required for operation (see "Product description").

Product description

The sensor is an essential component for structure monitoring (structural health monitoring (SH-M)) on rotor blades of wind turbine generators. SH-M can be used to continuously monitor the structural integrity of rotor blades. In a teach-in phase, the system learns independently how the rotor blades behave in the normal condition. This means that any problems can be detected at an early stage during operation of the system and investigated more closely in order to avoid major repairs and consequential damage. The sensor is mounted on the inside of the rotor blade. IO-Link is used for communication to the higher-level controller. One sensor is required for each rotor blade. The sensor is part of the Blade Intelligence rotor blade monitoring system product portfolio for wind turbine generators. The system essentially consists of sensors for ice detection, load monitoring, lightning current measurement, and structural health monitoring, which were specially developed for use on the rotor blade. The sensors can be combined individually. The sensor data is transmitted to a common evaluation unit via the IO-Link communication module. The evaluation unit is available as a ready-to-use switchgear and controlgear assembly (see accessories). For alternatives to the ready-to-use switchgear and controlgear assembly solution, please contact your Phoenix Contact subsidiary. The Blade Intelligence rotor blade monitoring system can also be reliably integrated into existing systems.

Your advantages

- Quick and easy startup
- Increased system safety through proactive monitoring of the rotor blade
- Predictable repairs thanks to early warnings in the event of problems
- Cost reduction by avoiding longer system downtimes
- Can be used in combination with other sensors from the Blade Intelligence product portfolio

Commercial data

Item number	1533075
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DT02
Product key	DTHABA
GTIN	4067923002654
Weight per piece (including packing)	1 kg
Weight per piece (excluding packing)	1 kg
Customs tariff number	90318080
Country of origin	DE

Technical data

Notes

Note regarding documentation	For further technical data, refer to the product documentation in the "Downloads" area
Notes on operation	An app that is subject to a fee is required to operate the product. You can purchase and download the app in the PLCnext Store.

Product properties

Product type	Sensor
--------------	--------

Dimensions

External dimensions

Width / Height / Depth	60 mm / 18 mm / 60 mm
------------------------	-----------------------

Material specifications

Material Housing	Aluminum (Housing)
Material Connecting cable	PUR (Connection line)

Cable/line

Cable entry

Connection method	Push-Pull M12 connector
-------------------	-------------------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Maximum altitude	≤ 3000 m (Above sea level)

Mounting

Mounting type	adhesive (mounting material not supplied as standard)
---------------	---

WIL-SHM-P - Sensor


1533075

<https://www.phoenixcontact.com/us/products/1533075>



Drawings

Dimensional drawing

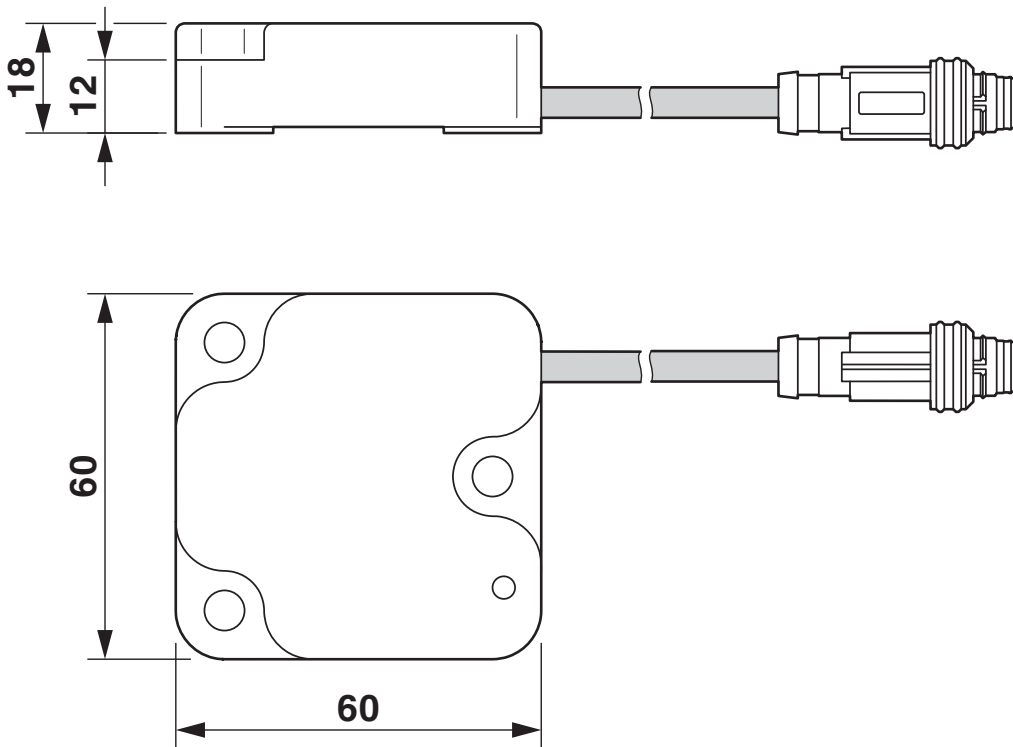

Dimensions (in mm)


WIL-SHM-P - Sensor

1533075

<https://www.phoenixcontact.com/us/products/1533075>




Application drawing

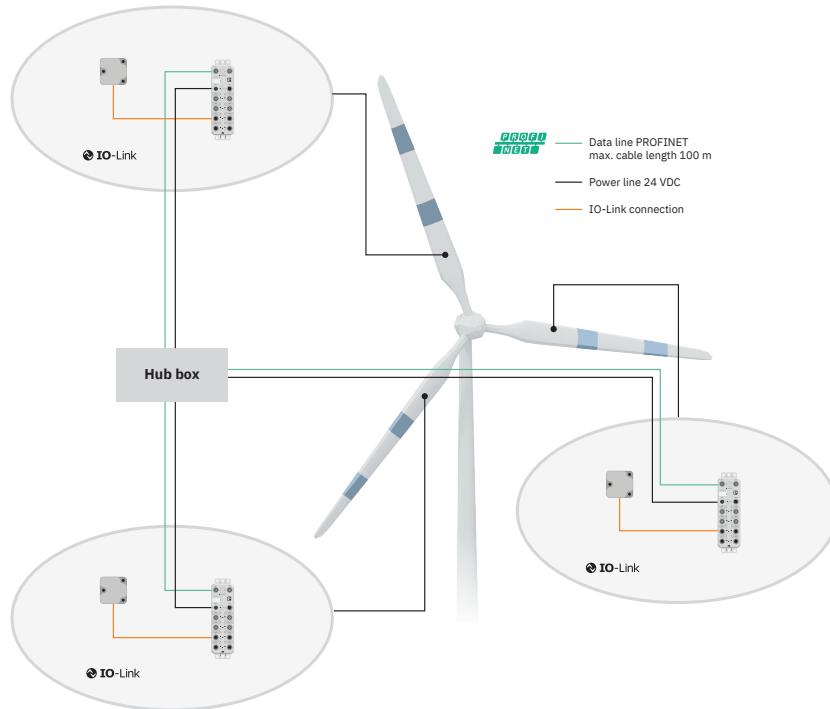

Blade Intelligence: System topology with SHM-P as an individual solution

Application drawing

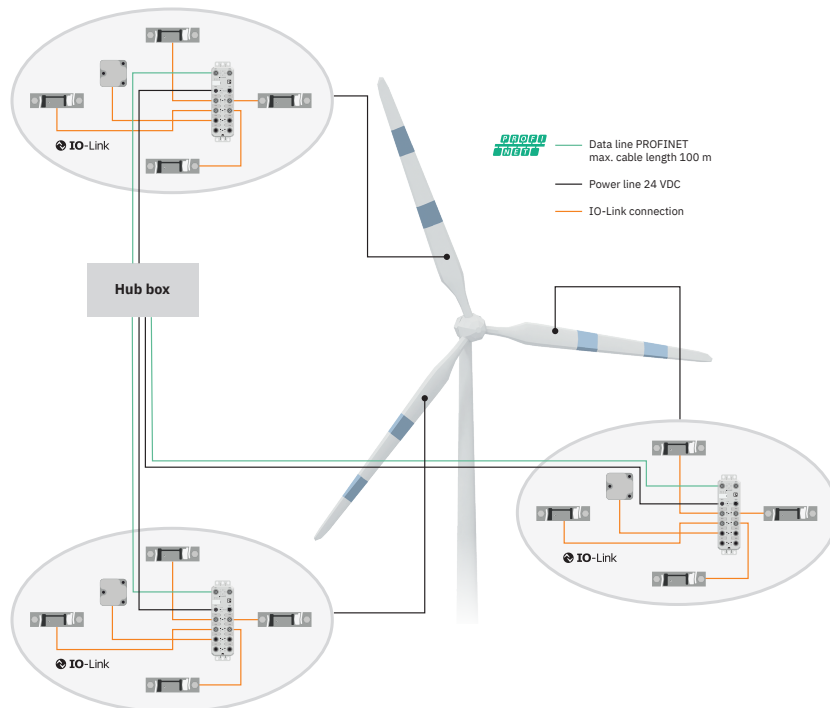

Blade Intelligence: System topology with RM-S-P and SHM-P


WIL-SHM-P - Sensor

1533075

<https://www.phoenixcontact.com/us/products/1533075>



Application drawing

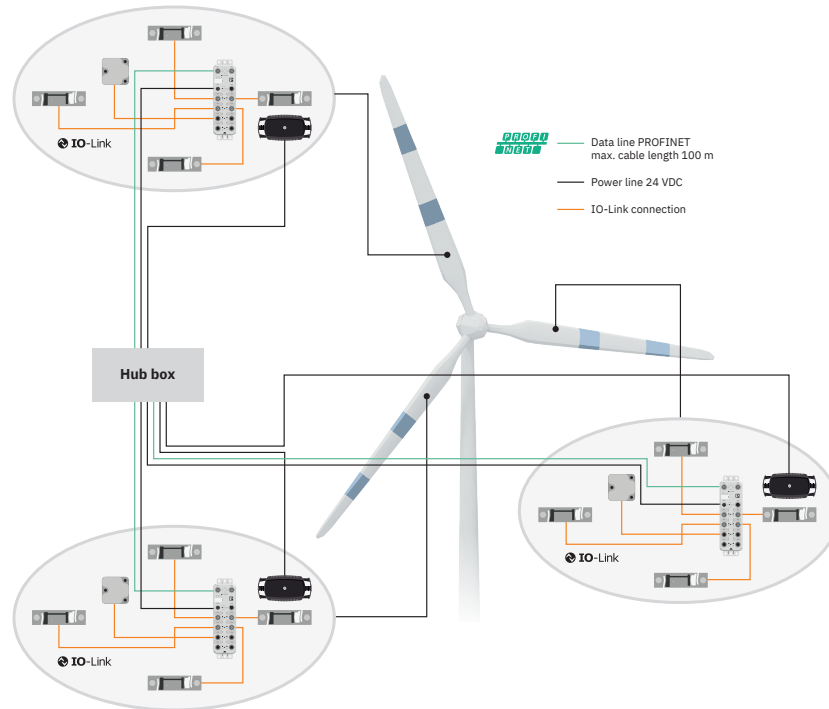

Blade Intelligence: Complete system with all sensors

WIL-SHM-P - Sensor



1533075

<https://www.phoenixcontact.com/us/products/1533075>

Classifications

ECLASS

ECLASS-13.0	27143137
ECLASS-15.0	27143137

ETIM

ETIM 10.0	EC000926
-----------	----------

UNSPSC

UNSPSC 21.0	43201500
-------------	----------

WIL-SHM-P - Sensor



1533075

<https://www.phoenixcontact.com/us/products/1533075>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com