# SB-8EPSD8AWT00S - Device connector front mounting

1623729

https://www.phoenixcontact.com/us/products/1623729

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



The figure shows the product with assembled crimp contacts. Please order crimp contacts separately.

M40, Device connector front mounting, application: Hybrid, series: SB, straight, shielded: yes, for standard and SPEEDCON interlock, No. of pos.: 8+4+PE, contact connection type: Pin, Crimp connection, Axial O-ring, flange dimensions: 40 mm x 40 mm, coding: Signal, coding 2, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

## Your advantages

- All housing can be fitted with pin or socket contacts
- A total of eight contacts are available for signal transmission
- Mechanical coding reliably prevents incorrect connections
- Safe use in the field, thanks to high degree of protection
- Consistent EMC protection for reliable connection solutions in the industrial environment

## Commercial data

| | |
|---|---|
| Item number | 1623729 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | AB33 |
| Product key | ABRCEL |
| GTIN | 4055626195162 |
| Weight per piece (including packing) | 195 g |
| Weight per piece (excluding packing) | 135.24 g |
| Customs tariff number | 85366990 |
| Country of origin | DE |

## Technical data

### Notes

| | |
|---|---|
| Order information: | Crimp contacts, 8 x Ø 1 mm, 5 x Ø 3.6 mm, order separately |

### Product properties

| | |
|---|---|
| Product type | Circular connectors (device side) |

### Connector

Insulating body

| | |
|---|---|
| Coding | Signal, coding 2 |
| Connection method | Crimp connection |
| Contact switching type | Pin |
| Application | Hybrid |
| Number of positions | 13 |
| Connection profile | 8+4+PE |
| Installation height | 2000 m (4000 m at 300 V system voltage in accordance with DIN EN 606664-1) |
| Number (Contact group 1) | 5 |
| Contact diameter (Contact group 1) | 3.6 mm |
| Litz wires Min. cross section (Contact group 1) | 2.5 mm² |
| Litz wires Max. cross section (Contact group 1) | 16 mm² |
| Rated current Contact (Contact group 1) | 70 A (for max. connection cross section) |
| Rated voltage Contact (Contact group 1) | 630 V AC (Overvoltage category III/3) |
| | 850 V DC (Overvoltage category II/3) |
| Rated surge voltage | 6 kV |
| Overvoltage category | III |
| Degree of pollution | 3 |
| Number (Contact group 2) | 4 |
| Contact diameter (Contact group 2) | 0.8 mm |
| Litz wires Max. cross section (Contact group 2) | 0.5 mm² |
| Rated current Contact (Contact group 2) | 8 A (for max. connection cross section) |
| Rated voltage Contact (Contact group 2) | 50 V AC/DC (Contact 5 ... 8) |
| Rated surge voltage | 1.5 kV |
| Overvoltage category | II, III |
| Degree of pollution | 3 |
| Number (Signal contacts) | 4 |
| Contact diameter (Signal contacts) | 1 mm |
| Litz wires Max. cross section (Signal contacts) | 1.5 mm² |
| Rated current Contact (Signal contacts) | 8 A (for max. connection cross section) |
| Rated voltage Contact (Signal contacts) | 500 V AC/DC (Contact 1 ... 4) |
| Rated surge voltage | 6 kV |
| Overvoltage category | III |

| | |
|---|---|
| Degree of pollution | 3 |

Housing

| | |
|---|---|
| Type | Flange housing |
| Thread type | M40 |
| Design | straight |
| Type of locking | for standard and SPEEDCON interlock |
| Pg screw connection | none |
| Mounting type | Front mounting/square flange (4x Ø 4,2 mm) |
| Flange dimensions | 40 mm x 40 mm |
| Housing material | Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn) |
| Material for screw connection | CuZn |
| Degree of protection (plugged in) | IP68/IP69K |
| Seal for the device | Axial O-ring |


## Environmental and real-life conditions

Ambient conditions

| | |
|---|---|
| Ambient temperature (operation) | -40 °C ... 115 °C (see derating curve) |


## Drawings

Dimensional drawing

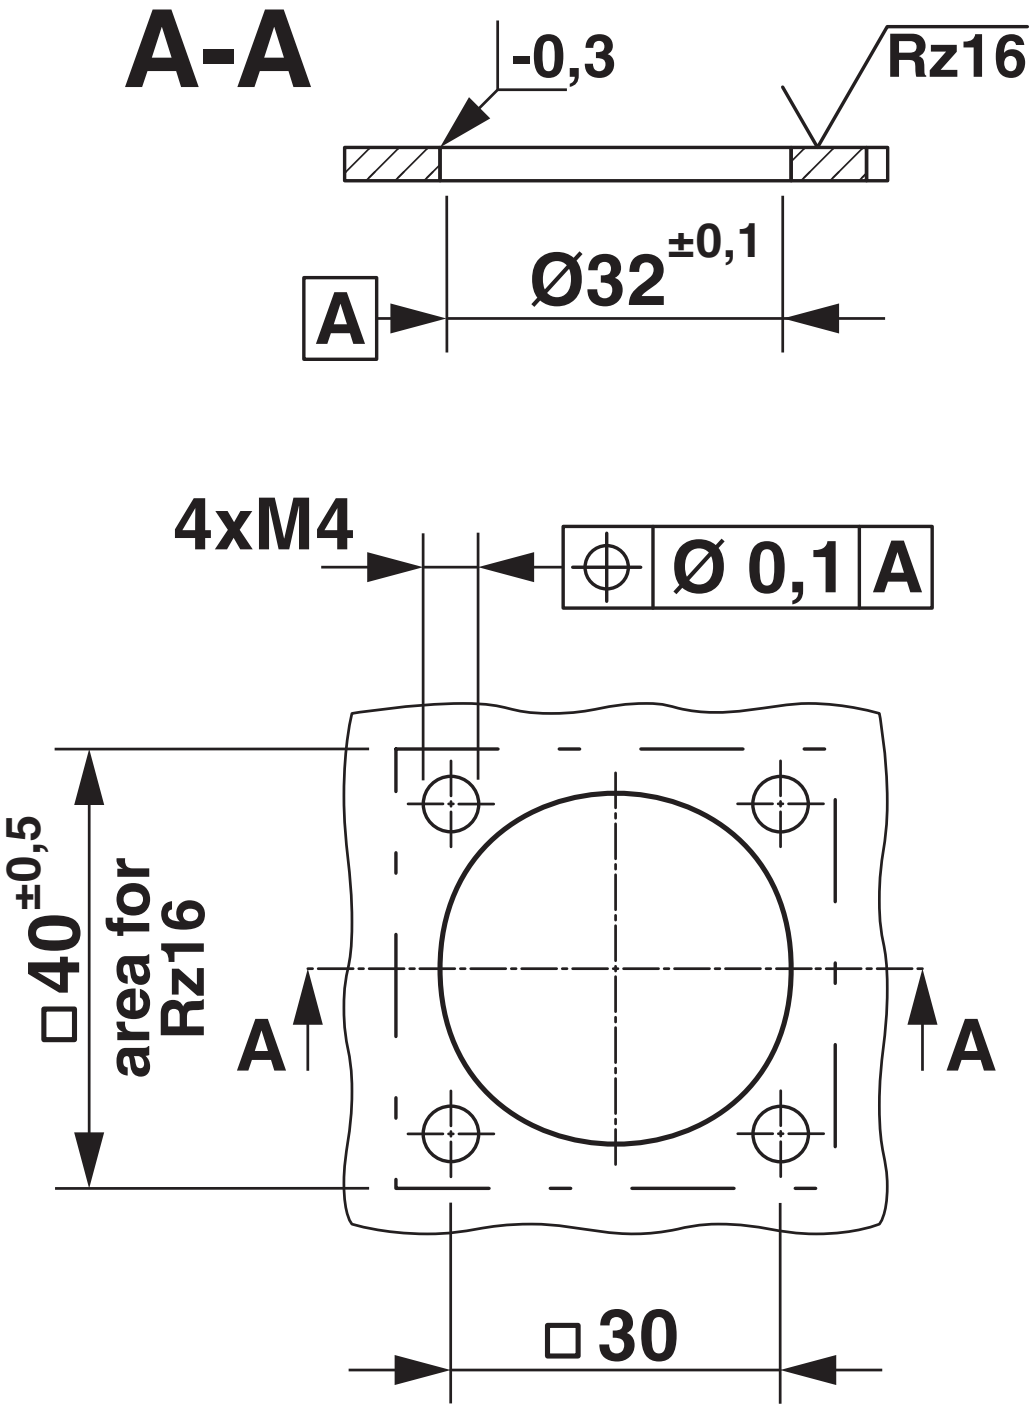



Installation dimensions

Schematic diagram

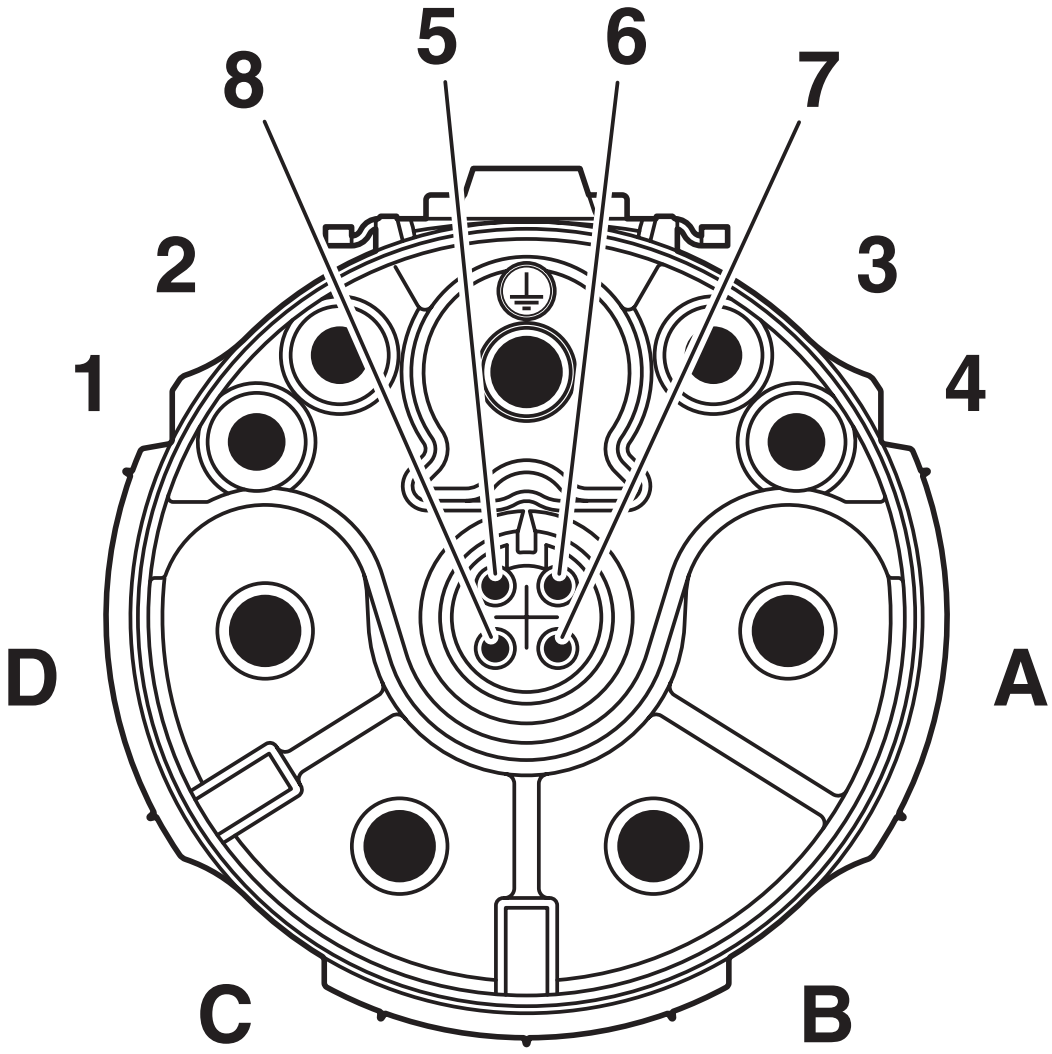



Pin assignment of pin signal, coding 2

Diagram

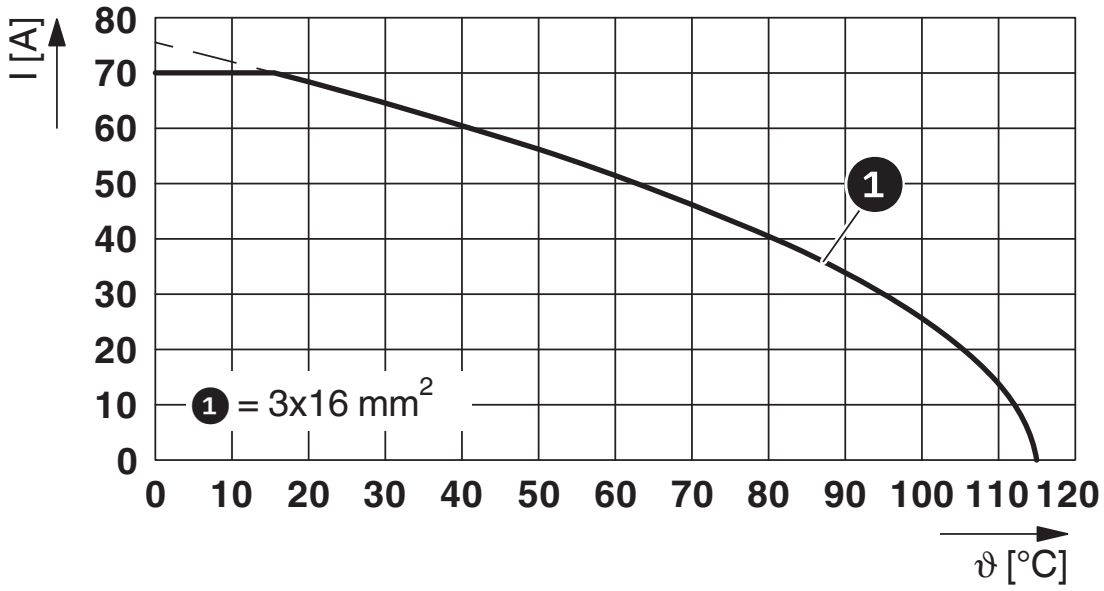



I = current strength, ϑ = ambient temperature, power contacts A–C: 3x up to 70 A, signal contacts: 4x 2 A constant, data contacts: no load

Diagram

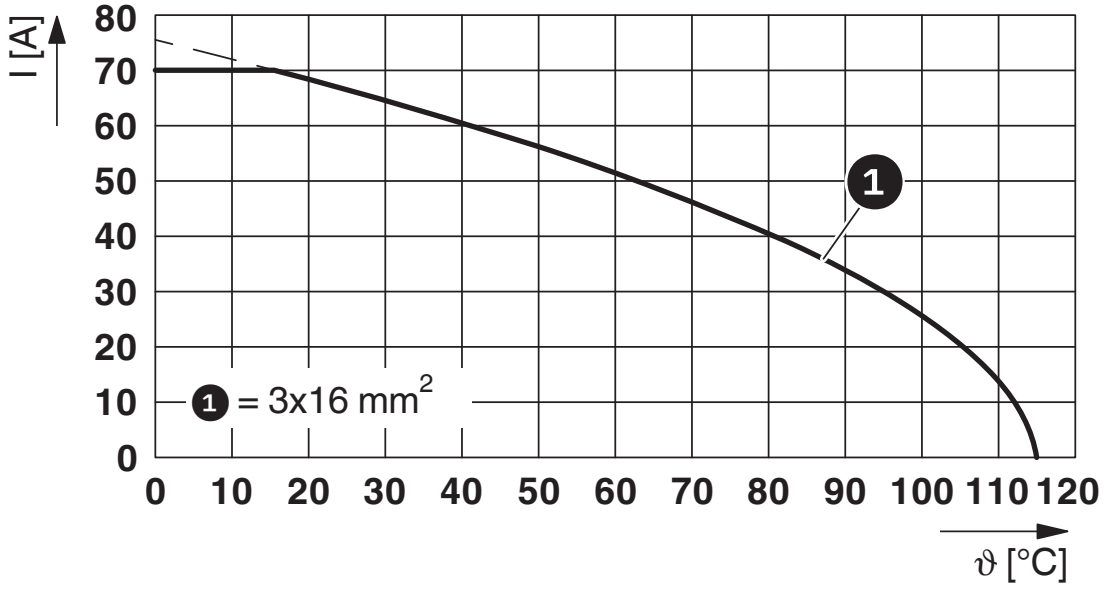

Diagram

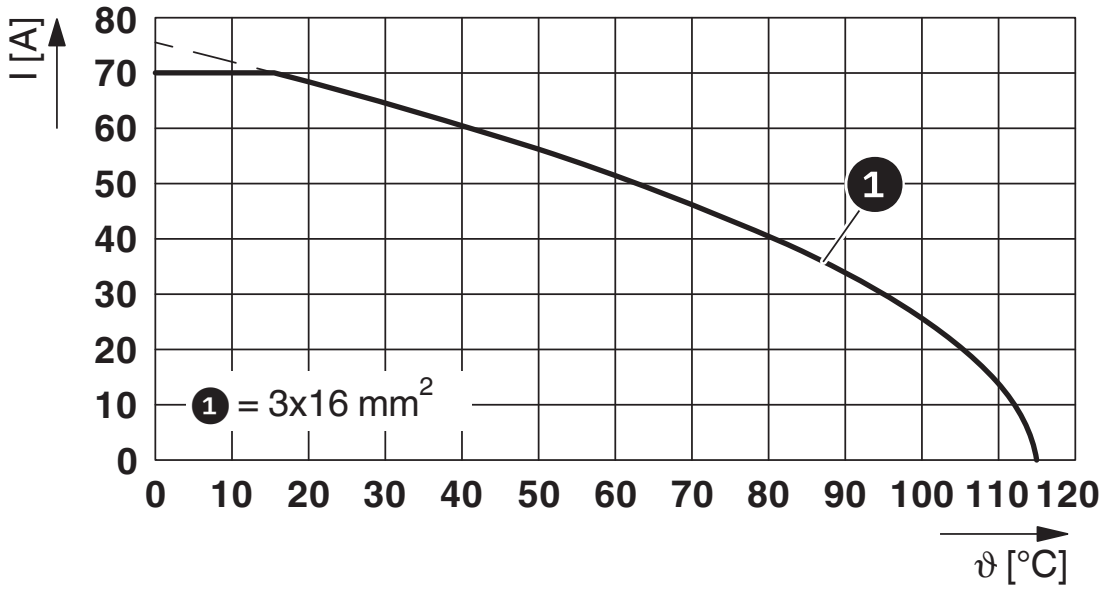
I [A]
80
70
60
50
40
30
20
10
0
1
1 = 3x16 mm²
0 10 20 30 40 50 60 70 80 90 100 110 120
ϑ [°C]

## Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1623729

**cUL Recognized**
Approval ID: E153698-20190718

| | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|---|---|---|---|---|
| keine | | | | |
| Power | 600 V | 24 A | 6 | - |
| Signal | 500 V | 4 A | 1,5 | - |
| Data | 50 V | 1 A | 0,34 | - |

**UL Recognized**
Approval ID: E153698-20190718

| | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|---|---|---|---|---|
| keine | | | | |
| Power | 600 V | 32 A | 6 | - |
| Signal | 500 V | 4 A | 1,5 | - |
| Data | 50 V | 1 A | 0,34 | - |

## Classifications

### ECLASS

| | |
|---|---|
| ECLASS-13.0 | 27440109 |
| ECLASS-15.0 | 27440109 |

### ETIM

| | |
|---|---|
| ETIM 10.0 | EC003569 |

### UNSPSC

| | |
|---|---|
| UNSPSC 21.0 | 39121400 |

## Environmental product compliance

EU RoHS

| | |
|---|---|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |

China RoHS

| | |
|---|---|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|---|---|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |


Phoenix Contact 2026 © - all rights reserved
https://www.phoenixcontact.com



Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com