


# PTSPL-6/1-2X2 2,9 VPE500 - PCB terminal block



1704834

<https://www.phoenixcontact.com/us/products/1704834>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

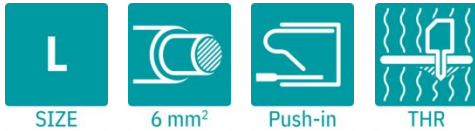

PCB terminal block, nominal current: 41 A, nominal cross section: 6 mm<sup>2</sup>, number of potentials: 1, number of rows: 1, number of positions per row: 1, product range: PTSPL 6/.., pitch: 0 mm, connection method: Push-in spring connection, mounting: THR soldering / wave soldering, conductor/PCB connection direction: 0 °, color: black, Pin layout: Linear pinning, Solder pin [P]: 2.9 mm, number of solder pins per potential: 4, type of packaging: Box packaging

## Your advantages

- Able to perform without insulating elements: ideal for easy integration into the SMT soldering process
- Tool-free spring principle enables time-saving connection of conductors with ferrules and tinned conductors
- Defined contact force ensures that contact remains stable over the long term

## Commercial data

Item number	1704834
Packing unit	500 pc
Minimum order quantity	5,000 pc
Product key	AANCBA
GTIN	4046356739986
Weight per piece (including packing)	1.88 g
Weight per piece (excluding packing)	1.78 g
Country of origin	DE

1704834

<https://www.phoenixcontact.com/us/products/1704834>

## Technical data

### Product properties

Product type	PCB terminal block
Product family	PTSPL 6/..
Product line	COMBICON Terminals L
Type	Circular conductor connection, single-pos.
Number of positions	1
Pitch	0 mm
Number of connections	1
Number of rows	1
Number of potentials	1
Pin layout	Linear pinning
Solder pins per potential	4

### Electrical properties

#### Properties

Nominal current $I_N$	41 A
-----------------------	------

### Connection data

#### Connection technology

Type	Circular conductor connection, single-pos.
Nominal cross section	6 mm <sup>2</sup>

#### Conductor connection

Connection method	Push-in spring connection
Conductor cross-section flexible	2.5 mm <sup>2</sup> ... 6 mm <sup>2</sup> (Conductors with tin-plated litz wires are to be used, for example type PV1-F.)
Conductor cross-section, flexible, with ferrule, without plastic sleeve	2.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Stripping length	12 mm ... 15 mm

### Mounting

Mounting type	THR soldering / wave soldering
Pin layout	Linear pinning

### Material specifications

#### Material data - contact

Note	WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Surface characteristics	hot-dip tin-plated
Metal surface terminal point (top layer)	Tin (4 μm - 8 μm Sn)

# PTSPL-6/1-2X2 2,9 VPE500 - PCB terminal block



1704834

<https://www.phoenixcontact.com/us/products/1704834>

Metal surface soldering area (top layer)	Tin (4 µm - 8 µm Sn)
--	----------------------

## Material data - housing

Color (Housing)	black (9005)
-----------------	--------------

## Dimensions

Dimensional drawing	
Width [w]	8.7 mm
Height [h]	13.7 mm
Length [l]	14.95 mm
Installed height	10.8 mm
Solder pin length [P]	2.9 mm
Pin dimensions	0.6 x 1 mm

## PCB design

Hole diameter	1.3 mm
---------------	--------

## Mechanical tests

### Conductor connection

Specification	IEC 60999-1:1999-11
Result	Test passed

### Test for conductor damage and slackening

Specification	IEC 60999-1:1999-11
Result	Test passed

### Pull-out test

Specification	IEC 60999-1:1999-11
Conductor cross-section/conductor type/tractive force setpoint/actual value	2.5 mm <sup>2</sup> / stranded PV1-F / > 50 N
	6 mm <sup>2</sup> / stranded PV1-F / > 80 N

## Electrical tests

### Temperature-rise test

Specification	60947-7-4/FDIS © IEC 2012
Requirement temperature-rise test	Increase in temperature ≤ 45 K

### Temperature cycles

Specification	IEC 60999-1:1999-11
Result	Test passed

## Environmental and real-life conditions

# PTSPL-6/1-2X2 2,9 VPE500 - PCB terminal block



1704834

<https://www.phoenixcontact.com/us/products/1704834>

## Vibration test

Specification	IEC 60068-2-6:2007-12
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 Hz ... 60.1 Hz)
Acceleration	5g (60.1 Hz ... 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis

## Shocks

Specification	IEC 60068-2-27:2008-02
Pulse shape	Semi-sinusoidal
Acceleration	30g
Shock duration	18 ms
Test directions	X-, Y- and Z-axis (pos. and neg.)

## Railway application: Shocks

Acceleration	30g
Shock duration	18 ms
Test directions	X-, Y- and Z-axis (pos. and neg.)

## Ambient conditions

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Relative humidity (storage/transport)	30 % ... 70 %
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C ... 100 °C (Depending on the current carrying capacity/derating curve)


## Packaging specifications

Type of packaging	Box packaging
-------------------	---------------

1704834

<https://www.phoenixcontact.com/us/products/1704834>

Drawings

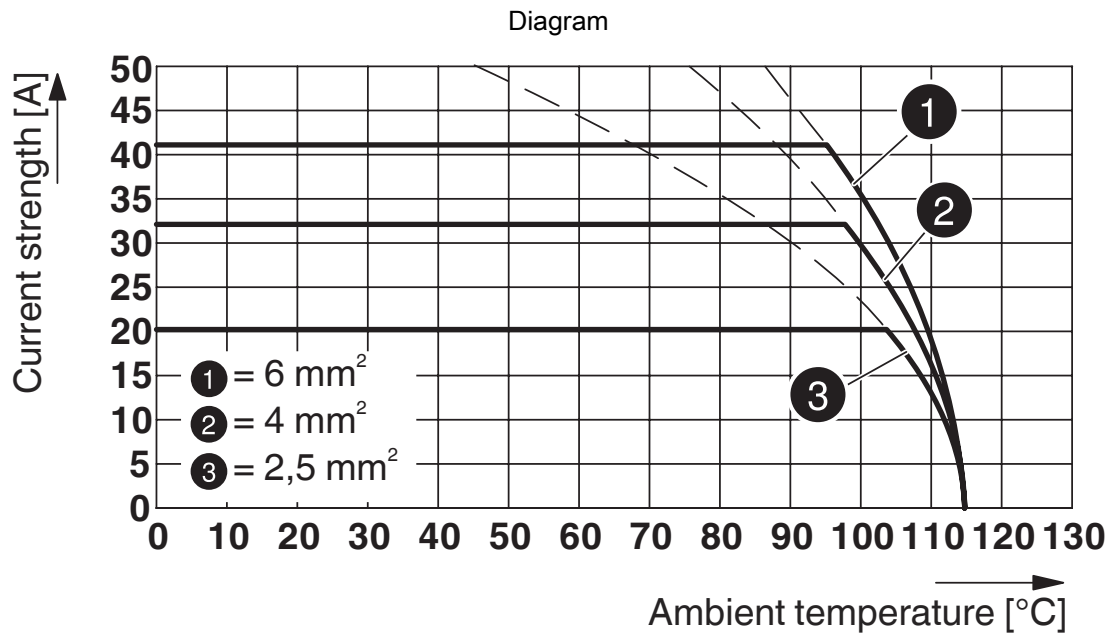

Type: PTSPL(O)-6/1-2X2 ... R32

# PTSPL-6/1-2X2 2,9 VPE500 - PCB terminal block




1704834

<https://www.phoenixcontact.com/us/products/1704834>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1704834>

 <b>cULus Recognized</b> Approval ID: E365246-20141111				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
keine				
	-	30 A	14 - 10	-

# PTSPL-6/1-2X2 2,9 VPE500 - PCB terminal block



1704834

<https://www.phoenixcontact.com/us/products/1704834>

## Classifications

### ECLASS

ECLASS-13.0	27460101
ECLASS-15.0	27460101

### ETIM

ETIM 10.0	EC002643
-----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

1704834

<https://www.phoenixcontact.com/us/products/1704834>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

### EF3.1 Climate Change

CO2e kg	0.016 kg CO2e
---------	---------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)