

# SACC-CI-M12FSR-4CON-L90 THR R - Contact carrier



1706527

<https://www.phoenixcontact.com/us/products/1706527>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact carrier, 4-position, Socket, angled, M12, A-coding, THR solder connection

## Product description

Pin assignment rotated 180°

## Your advantages

- Suitable for pick-and-place: Automated assembly on the PCB helps to increase efficiency in production
- Optimized design: Shifted center of gravity, thereby “effortless” standing on the PCB without locking clips
- Flexible: Easy positioning and alignment on the PCB even in confined spaces
- Modular: Compatible with the available THR housings

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1706527       |
| Packing unit                         | 120 pc        |
| Minimum order quantity               | 120 pc        |
| Sales key                            | AB23          |
| Product key                          | ABQAHT        |
| GTIN                                 | 4067923266735 |
| Weight per piece (including packing) | 8.75 g        |
| Weight per piece (excluding packing) | 5.296 g       |
| Customs tariff number                | 85366990      |
| Country of origin                    | DE            |

## Technical data

## Notes

|                    |                                                                                                                                                                                                                                                                                                                                                    |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Notes on operation | The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration. |
| Order information: | Not compatible with SPEEDCON housings.                                                                                                                                                                                                                                                                                                             |

## Product properties

|                         |                |
|-------------------------|----------------|
| Product type            | Contact insert |
| Application             | Signal         |
| Number of positions     | 4              |
| No. of control contacts | 4              |
| Shielded                | no             |
| Coding                  | A              |
| Thread type             | M12            |

## Insulation characteristics

|                      |    |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution  | 3  |

## Electrical properties

|                       |                            |
|-----------------------|----------------------------|
| Rated surge voltage   | 2.5 kV                     |
| Contact resistance    | $\leq 10 \text{ m}\Omega$  |
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage $U_N$ | 250 V                      |
| Nominal current $I_N$ | 4 A                        |

## Connection data

|                   |                       |
|-------------------|-----------------------|
| Connection method | THR solder connection |
|-------------------|-----------------------|

## Material specifications

|                                        |        |
|----------------------------------------|--------|
| Material Contact carrier               | PA 6.6 |
| Material Contact                       | CuZn   |
| Material Contact surface               | Au     |
| Flammability rating according to UL 94 | V0     |

## Connector

## Connection 1

|                   |        |
|-------------------|--------|
| Head design       | Socket |
| Head cable outlet | angled |
| Head thread type  | M12    |

1706527

<https://www.phoenixcontact.com/us/products/1706527>

|        |   |
|--------|---|
| Coding | A |
|--------|---|

## Mechanical properties

### Mechanical data

|                             |       |
|-----------------------------|-------|
| Insertion/withdrawal cycles | > 100 |
|-----------------------------|-------|

## Environmental and real-life conditions

### Ambient conditions

|                                                                   |                                                                       |
|-------------------------------------------------------------------|-----------------------------------------------------------------------|
| Degree of protection                                              | IP67 (correctly plugged in and locked)                                |
| Ambient temperature (operation) (male connector/female connector) | -25 °C ... 105 °C<br>-40 °C ... 105 °C (without mechanical actuation) |
| UL Type Rating                                                    | Type 4 (indoor use only)                                              |

## Standards and regulations

|                          |                              |
|--------------------------|------------------------------|
| Standard designation     | M12 circular connector       |
| Standards/specifications | according to IEC 61076-2-101 |

## Mounting


|               |                                                                 |
|---------------|-----------------------------------------------------------------|
| Assembly note | The pin assignment is rotated 180° to comply with the standard. |
|---------------|-----------------------------------------------------------------|

## Packaging specifications

|                   |       |
|-------------------|-------|
| Type of packaging | Belt  |
| [W] tape width    | 44 mm |

## Drawings

Schematic diagram

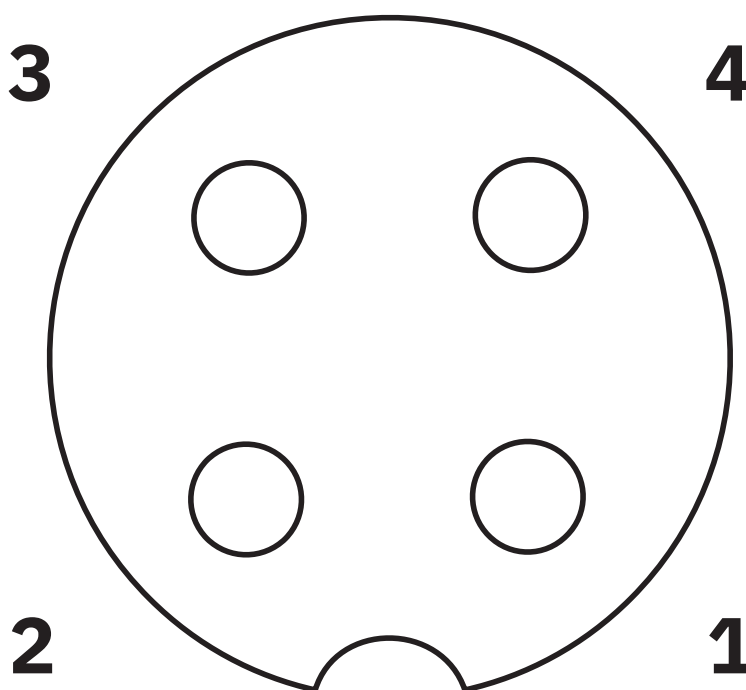

Pin assignment M12 socket, 4-pos., A-coded, view female side

# SACC-CI-M12FSR-4CON-L90 THR R - Contact carrier



1706527

<https://www.phoenixcontact.com/us/products/1706527>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1706527>

|                                                                                                                                                        |                       |                       |                   |                             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
| <div> <b>cULus Recognized</b><br/>Approval ID: E221474-20140616</div> |                       |                       |                   |                             |
|                                                                                                                                                        | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| keine                                                                                                                                                  |                       |                       |                   |                             |
|                                                                                                                                                        | 250 V                 | 4 A                   | 22 - 20           | -                           |

1706527

<https://www.phoenixcontact.com/us/products/1706527>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27440223 |
| ECLASS-15.0 | 27440223 |

### ETIM

|           |          |
|-----------|----------|
| ETIM 10.0 | EC003557 |
|-----------|----------|

1706527

<https://www.phoenixcontact.com/us/products/1706527>

## Environmental product compliance

### EU RoHS

|                                         |                    |
|-----------------------------------------|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|-----------------------------------------|--------------------|

### China RoHS

|                                        |                                          |
|----------------------------------------|------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-E                                   |
|                                        | No hazardous substances above the limits |

### EU REACH SVHC

|                                     |                            |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)