

FLKMS 50/32IM/LA/PLC - Passive module




2284510

<https://www.phoenixcontact.com/us/products/2284510>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

VARIOFACE sensor module, for connecting 32 p-n-p sensors, with LED



Your advantages

- With LED as an option
- For 32 channels
- Byte-by-byte labeling
- Positive and negative connection per signal

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 2284510 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | C421 |
| Product key | DK2181 |
| GTIN | 4017918055684 |
| Weight per piece (including packing) | 447 g |
| Weight per piece (excluding packing) | 411.92 g |
| Customs tariff number | 85369010 |
| Country of origin | DE |

FLKMS 50/32IM/LA/PLC - Passive module



2284510

<https://www.phoenixcontact.com/us/products/2284510>

Technical data

Product properties

| | |
|---------------------|------------------|
| Product type | Interface module |
| Product family | VARIOFACE |
| Number of positions | 50 |
| No. of channels | 32 |

Insulation characteristics: Air clearances and creepage distances

| | |
|----------------------|-----------------------|
| Insulation | Functional insulation |
| Overvoltage category | II |
| Pollution degree | 2 |

Electrical properties

| | |
|--------------------------|-------------------------|
| Operating voltage range | 19.2 V DC ... 26.4 V DC |
| Current (per branch) | ≤ 1 A |
| Current (Voltage supply) | ≤ 2 A |

Air clearances and creepage distances

| | |
|--------------------------|--------------------|
| Rated insulation voltage | 63 V |
| Rated surge voltage | 0.6 kV (1.2/50 μs) |

Supported controller: SIEMENS S7-1500

| | |
|-------------------|--------------------|
| Suitable I/O card | 6ES7521-1BL00-0AB0 |
| | 6ES7522-1BL00-0AB0 |
| | 6ES7522-1BL01-0AB0 |

Supported controller: SIEMENS S7-400

| | |
|-------------------|--------------------|
| Suitable I/O card | 6ES7421-1BL01-0AA0 |
| | 6ES7422-1BL00-0AA0 |
| | 6ES7422-7BL00-0AB0 |

Supported controller: ALLEN-BRADLEY ControlLogix

| | |
|-------------------|-----------|
| Suitable I/O card | 1756-IB32 |
| | 1756-OB32 |

Supported controller: ALLEN-BRADLEY PLC 5

| | |
|-------------------|----------|
| Suitable I/O card | 1771 IBN |
| | 1771 OBN |

Supported controller: HONEYWELL Experion PKS C200

| | |
|-------------------|------------|
| Suitable I/O card | TC-IDD 321 |
| | TC-ODD 321 |

Supported controller: MITSUBISHI MELSEC L

| | |
|-------------------|--------|
| Suitable I/O card | LX41C4 |
| | LX42C4 |

FLKMS 50/32IM/LA/PLC - Passive module



2284510

<https://www.phoenixcontact.com/us/products/2284510>

| | |
|--|----------|
| | LY41PT1P |
| | LY42PT1P |

Supported controller: MITSUBISHI MELSEC Q

| | |
|-------------------|---------|
| Suitable I/O card | QX81 |
| | QY81P |
| | QY82P |
| | QX71 |
| | QX72 |
| | QX82 |
| | QX82-S1 |

Supported controller: SCHNEIDER ELECTRIC Modicon TSX QUANTUM

| | |
|-------------------|---------|
| Suitable I/O card | DDI 353 |
| | DDI 853 |
| | DDO 353 |

Supported controller: SIEMENS S7-300 / ET 200 M

| | |
|-------------------|--------------------|
| Suitable I/O card | CPU 313C-2DP |
| | CPU 314C-2DP |
| | CPU 314C-2PtP |
| | 6ES7321-1BL00-0AA0 |
| | 6ES7322-1BL00-0AA0 |
| | 6ES7323-1BL00-0AA0 |
| | CPU 313C |
| | CPU 313C-2PtP |

Supported controller: GE-FANUC RX3i

| | |
|-------------------|-------------|
| Suitable I/O card | IC694MDL754 |
| | IC694MDL660 |

Connection data

Connection 1 (control level)

| | |
|----------------------------------|-------------------|
| Connection in acc. with standard | IEC 60603-13 |
| Connection method | IDC/FLK pin strip |
| Number of connections | 1 |
| Number of positions | 50 |
| Insertion/withdrawal cycles | > 50 |
| Pitch | 2.54 mm |

Connection 2 (field level)

| | |
|-------------------------------|---|
| Connection method | Screw connection |
| Stripping length | 7 mm |
| Screw thread | M3 |
| Number of positions | 100 |
| Conductor cross-section rigid | 0.2 mm ² ... 4 mm ² |

FLKMS 50/32IM/LA/PLC - Passive module



2284510

<https://www.phoenixcontact.com/us/products/2284510>

| | |
|---|--|
| Conductor cross-section rigid (2 conductors with same cross section) | 0.2 mm ² ... 1.5 mm ² |
| Conductor cross-section flexible | 0.2 mm ² ... 2.5 mm ² |
| | 0.25 mm ² ... 1.5 mm ² (Ferrule without plastic sleeve) |
| | 0.25 mm ² ... 2.5 mm ² (Ferrule with plastic sleeve) |
| Conductor cross-section flexible (2 conductors with same cross section) | 0.2 mm ² ... 1.5 mm ² |
| | 0.2 mm ² ... 0.75 mm ² (Ferrule without plastic sleeve) |
| | 0.5 mm ² ... 0.5 mm ² (TWIN ferrule with plastic sleeve) |
| Conductor cross-section AWG | 24 ... 12 |
| Tightening torque | 0.5 Nm ... 0.6 Nm |
| Pitch | 5.08 mm |

Signaling

| | |
|---------------------------|--------------|
| Status display | LED (yellow) |
| Status display present | yes |
| Operating voltage display | Green LED |

Dimensions

Item dimensions

| | |
|--------|----------|
| Width | 179.5 mm |
| Height | 90 mm |
| Depth | 79 mm |

Material specifications

| | |
|-----------------------------|-------------------|
| Color | gray (RAL 7042) |
| Housing insulation material | Polyamide 6 green |

Environmental and real-life conditions

Ambient conditions

| | |
|--|------------------|
| Degree of protection (Module) | IP00 |
| Degree of protection (Installation location) | ≥ IP54 |
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Altitude | ≤ 2000 m |

Approvals

UKCA

| | |
|-------------|----------------|
| Certificate | UKCA-compliant |
|-------------|----------------|

Standards and regulations

Air clearances and creepage distances

| | |
|-----------------------|----------------|
| Standards/regulations | EN IEC 60664-1 |
|-----------------------|----------------|

FLKMS 50/32IM/LA/PLC - Passive module



2284510

<https://www.phoenixcontact.com/us/products/2284510>

Mounting

| | |
|-------------------|-------------------|
| Mounting type | DIN rail mounting |
| Mounting position | any |

Notes

| | |
|--------------------|--|
| Notes on operation | For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met. |
|--------------------|--|

FLKMS 50/32IM/LA/PLC - Passive module




2284510

<https://www.phoenixcontact.com/us/products/2284510>

Drawings

Circuit diagram

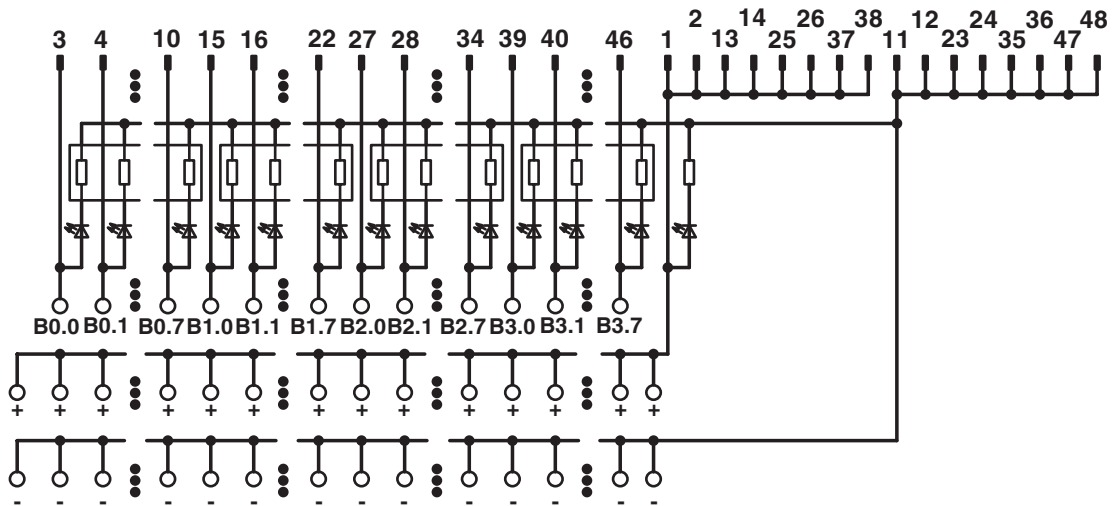

Connection scheme FLKMS 50/32IM/LA/PLC

FLKMS 50/32IM/LA/PLC - Passive module





2284510

<https://www.phoenixcontact.com/us/products/2284510>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2284510>

|  cUL Recognized Approval ID: E238705 | | | | |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| keine | | | | |
| | 24 V | 2 A | - | - |

|  UL Recognized Approval ID: E238705 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| keine | | | | |
| | 24 V | 2 A | - | - |

FLKMS 50/32IM/LA/PLC - Passive module



2284510

<https://www.phoenixcontact.com/us/products/2284510>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27141152 |
| ECLASS-15.0 | 27141152 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC002780 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

FLKMS 50/32IM/LA/PLC - Passive module



2284510

<https://www.phoenixcontact.com/us/products/2284510>

Environmental product compliance

EU RoHS

| | |
|---|--------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 7(c)-I |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com