


# FLKM-KS40/YCS/ZFKDS - Passive module



2314723

<https://www.phoenixcontact.com/us/products/2314723>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Universal interface module with 1:1 connection between 40-pos. system connection and spring-cage terminal block connection.

## Commercial data

Item number	2314723
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	DK218N
GTIN	4046356155007
Weight per piece (including packing)	211.2 g
Weight per piece (excluding packing)	211.2 g
Country of origin	DE

2314723

<https://www.phoenixcontact.com/us/products/2314723>

## Technical data

### Product properties

Product type	Interface module
No. of channels	8
	16
Operating mode	100% operating factor

### Insulation characteristics: Air clearances and creepage distances

Insulation	Functional insulation
Overvoltage category	II
Pollution degree	2

### Electrical properties

Operating voltage (AC)	≤ 30 V AC
Operating voltage (DC)	≤ 30 V DC
Current (per branch)	≤ 1 A

### Air clearances and creepage distances

Rated insulation voltage	50 V
Rated surge voltage	0.5 kV (1.2/50 μs)

### Supported controller: YOKOGAWA CS3000 CentumVP

Suitable I/O card	AAB841
	AAI135
	AAI141
	AAI143
	AAI543
	AAI835
	AAI841
	AAR181
	AAT141
	AAV141
	AAV142
	AAV542
	AAP135

### Supported controller: YOKOGAWA STARDOM

Suitable I/O card	NFAI141
	NFAI143
	NFAI543
	NFAI135
	NFAP135
	NFAV141
	NFAV142

2314723

<https://www.phoenixcontact.com/us/products/2314723>

	NFAV542
	NFAB841
	NFAI841
	NFAI835

## Connection data

### Connection 1 (control level)

Connection method	Yokogawa, KS compatible
Number of connections	1
Number of positions	40
Tightening torque	0.5 Nm
Pitch	2.54 mm

### Connection 2 (field level)

Connection method	Spring-cage connection
Stripping length	7.5 mm
Number of positions	40
Conductor cross-section rigid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section flexible	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
	0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (Ferrule without plastic sleeve)
	0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (Ferrule with plastic sleeve)
Conductor cross-section AWG	24 ... 14
Pitch	5.08 mm

## Signaling

Status display present	no
------------------------	----

## Dimensions

### Item dimensions

Width	112 mm
Height	89.6 mm
Depth	59.7 mm

## Environmental and real-life conditions

### Ambient conditions

Degree of protection (Module)	IP00
Degree of protection (Installation location)	≤ IP54
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Altitude	≤ 2000 m

## Approvals

UKCA

# FLKM-KS40/YCS/ZFKDS - Passive module



2314723

<https://www.phoenixcontact.com/us/products/2314723>

Certificate	UKCA-compliant
-------------	----------------

## Standards and regulations

Air clearances and creepage distances

Standards/regulations	EN IEC 60664-1
-----------------------	----------------

## Mounting

Mounting type	DIN rail mounting
Mounting position	any

## Notes

Notes on operation	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.
--------------------	--

# FLKM-KS40/YCS/ZFKDS - Passive module




2314723

<https://www.phoenixcontact.com/us/products/2314723>

## Drawings

Dimensional drawing

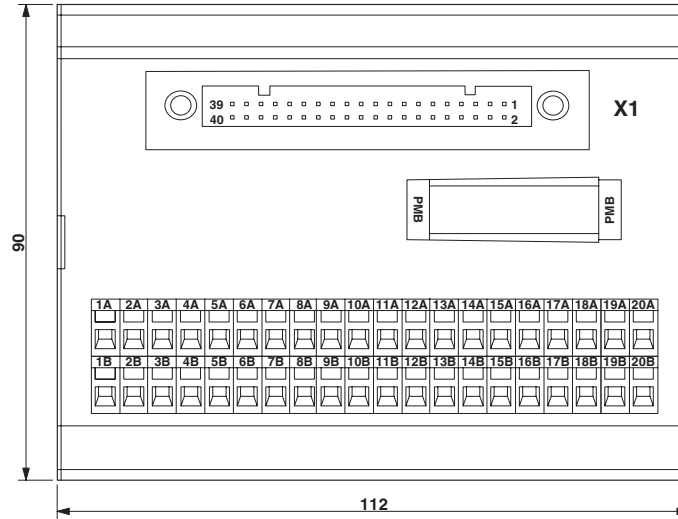


# FLKM-KS40/YCS/ZFKDS - Passive module



2314723

<https://www.phoenixcontact.com/us/products/2314723>

## Circuit diagram

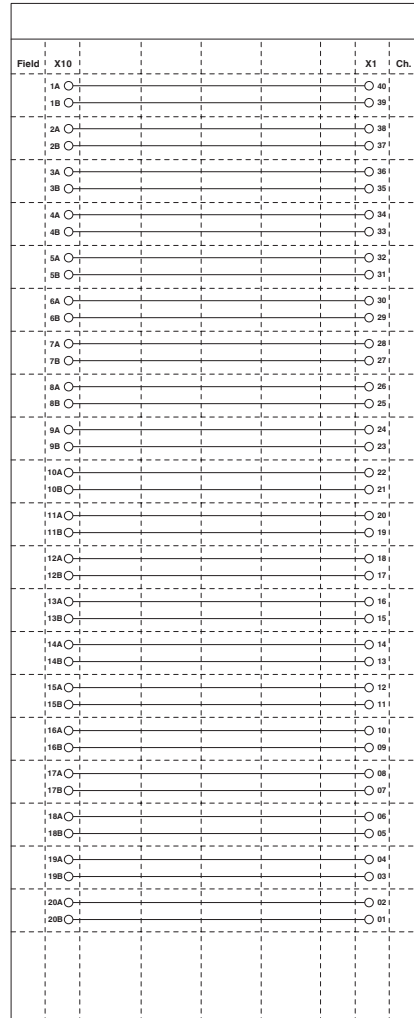

# FLKM-KS40/YCS/ZFKDS - Passive module



2314723

<https://www.phoenixcontact.com/us/products/2314723>

## Classifications

### ECLASS

ECLASS-13.0	27141152
ECLASS-15.0	27141152

### ETIM

ETIM 9.0	EC002780
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# FLKM-KS40/YCS/ZFKDS - Passive module



2314723

<https://www.phoenixcontact.com/us/products/2314723>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)