FB-DP-RPTR - Repeater

2316373

https://www.phoenixcontact.com/us/products/2316373

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



PROFIBUS DP interface/repeater module

Product description

PROFIBUS DP repeater expansion module for the PROFIBUS DP/PA coupler system

Your advantages

- No bus addressing of device required
- Automatic detection of baud rate up to 12 Mbps
- Integrated switchable terminator
- Supported protocols: DP-V0, V1, V2, FDL, MPI, FMS and Profisafe

ELEKTROGERÄTE RÜCKNAHME

Commercial data

Item number	2316373
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN11
Product key	DNC135
GTIN	4055626020495
Weight per piece (including packing)	276.5 g
Weight per piece (excluding packing)	276.5 g
Customs tariff number	85176200
Country of origin	NL

Technical data

Notes

Note on application

Note on application	Only for industrial use

Product properties

Product type	Device coupler

Electrical properties

Supply

Supply voltage range	Supplied via backplane
Typical current consumption	± 160 mA
Max. current consumption	270 mA

Connection data

Supply


Connection method	Bus base module
Conductor cross-section, flexible	0.20 mm² ... 2.50 mm²
Conductor cross-section, rigid	0.20 mm² ... 2.50 mm²
Conductor cross-section AWG	24 ... 12

Interfaces

Data: PROFIBUS DP

Transmission speed	12 Mbps (100 m cable length)
	1.5 Mbps (200 m cable length)
	500 kbps (400 m cable length)
	187.5 kbps (1000 m cable length)
Transmission speed range	9.6 kbps ... 93.75 kbps (1200 m cable length)
Termination resistor	390 Ω - 220 Ω - 390 Ω (switchable)

Dimensions

Dimensional drawing	
Width	25 mm
Height	100 mm
Depth	132 mm

Material specifications

Color (Housing)	green (RAL 6021)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 60 °C
Altitude	2000 m
Permissible humidity (operation)	5 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	5 % ... 95 % (non-condensing)

Approvals

Conformity/Approvals

UL, USA / Canada	UL 508 Listed
UL, Canada	CSA C22.2 No. 142

Standards and regulations

Standards/regulations

Standards/regulations	Ring wave noise immunity in acc. with IEC 61000-4-12

Standards/regulations

Standards/regulations	Dry heat in acc. with IEC 61131-2

Standards/regulations

Standards/regulations	Damp heat in acc. with IEC 61131-2

Standards/regulations

Standards/regulations	Shock and vibration in acc. with EN 61131-2 and EN 50178

PROFIBUS standardization


Standards/regulations	IEC 61158-2

Mounting

Mounting type	DIN rail mounting
Mounting position	on horizontal DIN rail NS 35 in acc. with EN 60715
Useable DIN rail type	DIN rail: 35 mm

Drawings

Dimensional drawing

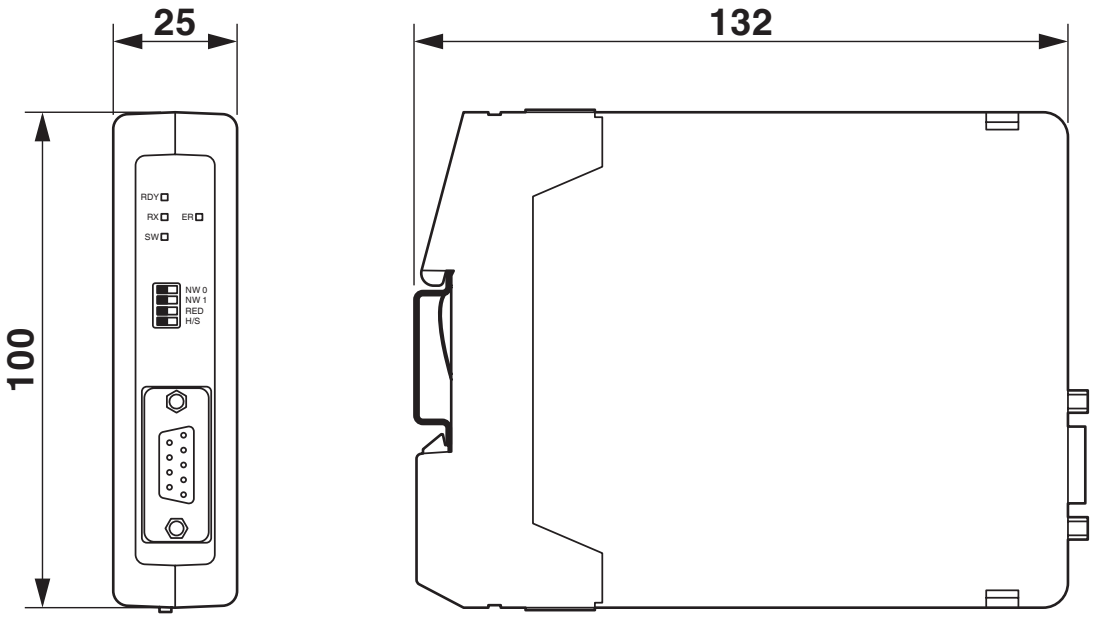

Classifications

ECLASS

ECLASS-13.0	27242608

ETIM

ETIM 9.0	EC001604

UNSPSC

UNSPSC 21.0	32151600

Environmental product compliance

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2026 © - all rights reserved
https://www.phoenixcontact.com

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com