

# IB IL TEMP 2 UTH-XC-PAC - Temperature module



2701216

<https://www.phoenixcontact.com/us/products/2701216>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



The figure shows the standard item

Inline, Temperature measurement terminal, Analog UTH inputs: 2 (Thermocouples or linear voltage), connection technology: 2-conductor, transmission speed in the local bus: 500 kbps, Extreme conditions version, degree of protection: IP20, including Inline connector and labeling field

## Product description

The terminal is designed for use within an Inline station. This terminal can be used to acquire signals from standard thermocouples. It supports 13 different types of thermocouples according to DIN EN 60584-1 and DIN 43710, as well as a linear voltage input of -15 mV to +85 mV. Thanks to special engineering measures and tests, the terminal can be used under extreme ambient conditions.

## Your advantages

- 2 differential inputs for thermocouples or linear voltage
- 1 input for an external cold junction, Pt 1000 or Ni 1000
- The channels are parameterized independently of one another via the bus system
- Internal detection and compensation of cold junction temperature (can be parameterized)
- Absolute and differential temperature measurement (can be parameterized)
- Pt 1000 sensor in the vicinity of the connection terminal blocks of the thermocouple inputs for internal measurement of the cold junction temperature
- Measured values can be represented in three different formats
- Can be used under extreme ambient conditions
- Extended temperature range of -40 °C ... +70 °C (see "Tested successfully: use under extreme ambient conditions" in the data sheet)
- Coated PCBs

## Commercial data

Item number	2701216
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DR01
Product key	DRI143
GTIN	4046356727846
Weight per piece (including packing)	98.9 g
Weight per piece (excluding packing)	98.9 g
Customs tariff number	85389099
Country of origin	DE

## Technical data

### Dimensions

Dimensional drawing	
Width	12.2 mm
Height	136.8 mm
Depth	71.5 mm
Note on dimensions	Housing dimensions

### Notes

#### Note on application

Note on application	Only for industrial use
---------------------	-------------------------

### Material specifications

Color (Housing)	green (RAL 6021)
-----------------	------------------

### Interfaces

#### Inline local bus

Number of interfaces	2
Connection method	Inline data jumper
Transmission speed	500 kbps

### System properties

#### Programming data (LocalbusSlave)

Length code (hex)	02
ID code (dec.)	127
Length code (dec)	02
Process data channel	32 bit
Input address area	4 Byte
Output address area	4 Byte
Parameter channel (PCP)	0 Byte
Register length (bus)	32 bit

#### Fieldbus data telegram

Required parameter data	6 Byte
Required configuration data	4 Byte

## Input data

### Analog:

Input name	Analog UTH inputs
Description of the input	Inputs for thermocouples or linear voltage
Number of inputs	2 (Thermocouples or linear voltage)
Connection method	Inline connector
Connection technology	2-conductor
Note regarding the connection technology	Shielded compensating line for TC with encapsulated sensors
A/D conversion time	typ. 120 µs (per channel)
Sensor types that can be used (TC)	U, T, L, J, E, K, N, S, R, B, C, W, HK
Tolerance, relative	see tables for tolerance values
Tolerance, absolute	typ. ± 0.6 K (Sensor type K) see tables for tolerance values
Measuring principle	Successive approximation
Measured value representation	16 bits (15 bits + sign bit)
Process data update	max. 30 ms (For both channels)
Protective circuit	Surge protection (TC channels); up to ±40 V

## Product properties

Product type	I/O component
Product family	Inline
Type	modular
Scope of supply	including Inline connector and labeling field
Operating mode	Process data operation with 2 words
Special properties	Extreme conditions version
Diagnostics messages	Failure of the internal I/O supply I/O error message sent to the bus coupler Failure of or insufficient communications power $U_L$ I/O error message sent to the bus coupler I/O error Error message in the process data User error Error message in the process data

### Insulation characteristics

Overvoltage category	II (IEC 60664-1, EN 60664-1)
Pollution degree	2 (IEC 60664-1, EN 60664-1)

## Electrical properties

### Potentials: Communications power ( $U_L$ )

Supply voltage	7.5 V DC (via voltage jumper)
Current draw	max. 60 mA typ. 43 mA

### Potentials: Supply of analog modules ( $U_{ANA}$ )

Supply voltage	24 V DC (via voltage jumper)
----------------	------------------------------

# IB IL TEMP 2 UTH-XC-PAC - Temperature module



2701216

<https://www.phoenixcontact.com/us/products/2701216>

Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 18 mA
	typ. 11 mA

## Electrical isolation/isolation of the voltage ranges

Test voltage: 7.5 V supply (bus logics)/24 V analog supply (analog I/O)	500 V AC, 50 Hz, 1 min
Test voltage: 7.5 V supply (bus logic)/functional ground	500 V AC, 50 Hz, 1 min
Test voltage: 24 V analog supply (analog I/O)/functional ground	500 V AC, 50 Hz, 1 min

## Connection data

### Connection technology

Connection name	Inline connector
-----------------	------------------

### Inline connector

Connection method	Spring-cage connection
Conductor cross-section, rigid	0.08 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross-section, flexible	0.08 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross-section AWG	28 ... 16
Stripping length	8 mm

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C (Standard)
	-40 °C ... 70 °C (Extended, see section "Tested successfully: use under extreme ambient conditions" in the data sheet.)
Degree of protection	IP20
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 95 % (non-condensing)

## Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

## Mounting

Mounting type	DIN rail mounting
---------------	-------------------

# IB IL TEMP 2 UTH-XC-PAC - Temperature module



2701216


<https://www.phoenixcontact.com/us/products/2701216>

## Drawings

Dimensional drawing



Connection diagram

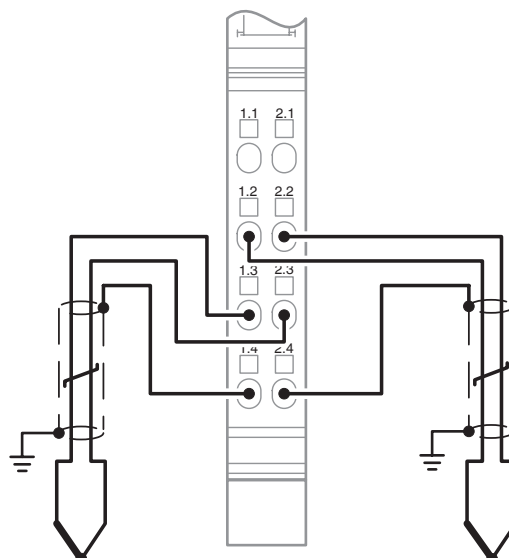

# IB IL TEMP 2 UTH-XC-PAC - Temperature module



2701216

<https://www.phoenixcontact.com/us/products/2701216>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2701216>



**cULus Recognized**  
Approval ID: E140324

2701216

<https://www.phoenixcontact.com/us/products/2701216>

## Classifications

### ECLASS

ECLASS-13.0	27242601
ECLASS-15.0	27242601

### ETIM

ETIM 9.0	EC001596
----------	----------

### UNSPSC

UNSPSC 21.0	32151600
-------------	----------

2701216

<https://www.phoenixcontact.com/us/products/2701216>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	85b8d1b2-e4c7-4f6f-b613-5f1a1f7bde88

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)