

IB IL 24 PWR IN/R-XC-PAC - Inline terminal



2701298

<https://www.phoenixcontact.com/us/products/2701298>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Inline power terminal or boost terminal, version for extreme conditions, complete with accessories (connector connector and labeling field), 24 V DC, without fuse

The figure shows the standard item

Product description

The terminal is designed for use within an Inline station. If the maximum current carrying capacity of potential jumper U_L is reached, this terminal can be used to feed in the communications power again. To do this, apply a 24 V DC voltage (U_{24V}) to the terminal. The communications power (U_L) and the supply voltage for the analog terminals (U_{ANA}) are generated from this voltage. In addition, the terminal enables the feed-in of the 24 V DC main voltage (U_M) and the 24 V DC segment voltage (U_S). Features - Feed-in of all 24 V DC voltages required for the low-level signal of an Inline station - Diagnostic indicators

Your advantages

- Supply of all 24 V voltages required for the low-level signal of an Inline station
- Diagnostic and status indicators
- Can be used under extreme ambient conditions
- Extended temperature range of -40 °C ... +70 °C (see "Tested successfully: use under extreme ambient conditions" in the data sheet)
- Coated PCBs

Commercial data


Item number	2701298
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	DR01
Product key	DRI123
GTIN	4046356735704
Weight per piece (including packing)	234.7 g
Weight per piece (excluding packing)	192 g
Customs tariff number	85389091
Country of origin	DE

2701298

<https://www.phoenixcontact.com/us/products/2701298>

Technical data

Dimensions

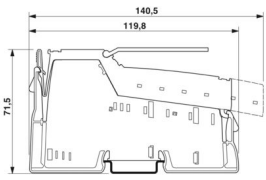Dimensional drawing	
Width	48.8 mm
Height	119.8 mm
Depth	71.5 mm

Material specifications

Color	green
-------	-------

Interfaces

Inline local bus

Number of interfaces	2
Connection method	Inline data jumper
Transmission speed	500 kbps / 2 Mbps (Can be used in Inline stations with these transmission speeds)

System properties

Programming data (LocalbusSlave)

ID code (dec.)	none
Register length (bus)	0 bit

Fieldbus data telegram

Required parameter data	0 Byte
Required configuration data	0 Byte

Product properties

Product type	I/O component
Product family	Inline
Type	modular
	Inline

Insulation characteristics

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

Electrical properties

Maximum power dissipation for nominal condition	3 W
---	-----

IB IL 24 PWR IN/R-XC-PAC - Inline terminal



2701298

<https://www.phoenixcontact.com/us/products/2701298>

Test section	7.5 V communications power, 24 V analog supply/functional ground 500 V AC 50 Hz 1 min
	7.5 V logics supply, 24 V analog supply / 24 V main supply, 24 V segment supply 500 V AC 50 Hz 1 min
	24 V main supply, 24 V segment supply/functional ground 500 V AC 50 Hz 1 min
Protective circuit	Surge protection (segment supply, main supply, 24 V supply); Input protective diodes (can be destroyed by permanent overload)Pulse loads up to 1500 W are short circuited by the input protective diode.
	Protection against polarity reversal (segment supply/main supply); Parallel diodes for protection against polarity reversal; in the event of an error the high current flowing through the diodes causes the fuse connected upstream to blow.
	Polarity reversal (24 V supply); Serial diode in the lead path of the power supply unit; in the event of an error only a low current flows. In the event of an error, no fuse trips within the external power supply unit.
Fuse	electrical/thermal overload protection, included in scope of delivery

Potentials: 24 V supply (U_{24V}) for generating U_L and U_{ANA}

Supply voltage	24 V DC (via Inline connector)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 1.25 A DC (at nominal voltage; consisting of: 0.75 A DC for the communications power and 0.5 A DC for the analog voltage supply)
	min. 12 mA DC (at nominal voltage)

Potentials: Communications power (U_L)

Supply voltage	7.5 V DC (via voltage jumper)
Power supply	max. 2 A DC

Potentials: Supply of analog modules (U_{ANA})

Supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Power supply	max. 0.5 A DC

Potentials: Main circuit supply (U_M)

Supply voltage	24 V DC (nominal value)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Power supply	max. 8 A (sum of $U_M + U_S$)

Potentials: Segment circuit supply (U_S)

Supply voltage	24 V DC (nominal value)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Power supply	max. 8 A DC (sum of $U_M + U_S$)

Connection data

Connection technology

IB IL 24 PWR IN/R-XC-PAC - Inline terminal



2701298

<https://www.phoenixcontact.com/us/products/2701298>

Connection name	Inline connector
-----------------	------------------

Inline connector

Connection method	Spring-cage connection
Conductor cross-section, rigid	0.08 mm ² ... 1.5 mm ²
Conductor cross-section, flexible	0.08 mm ² ... 1.5 mm ²
Conductor cross-section AWG	28 ... 16
Stripping length	8 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 55 °C -40 °C ... 70 °C (Extended, see section "Tested successfully: use under extreme ambient conditions" in the data sheet.)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)
Permissible humidity (storage/transport)	10 % ... 95 % (according to DIN EN 61131-2)
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)

Mounting

Mounting type	DIN rail mounting
---------------	-------------------

IB IL 24 PWR IN/R-XC-PAC - Inline terminal

2701298


<https://www.phoenixcontact.com/us/products/2701298>

Drawings

Dimensional drawing



Connection diagram

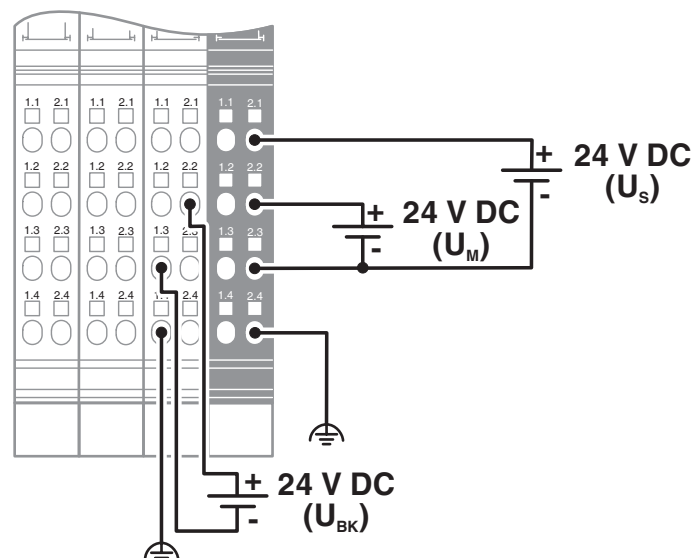

IB IL 24 PWR IN/R-XC-PAC - Inline terminal



2701298

<https://www.phoenixcontact.com/us/products/2701298>

Environmental product compliance

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com