

# IB IL SGI 2/P/EF-PAC - Analog module



2702373

<https://www.phoenixcontact.com/us/products/2702373>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



The figure shows the standard item

Inline, Strain gauge measurement terminal, transmission speed in the local bus: 500 kbps, 2 precise and fast inputs, 4-, 6-conductor connection technology, degree of protection: IP20, including Inline connectors and marking fields

## Product description

The terminal is designed for use within an Inline station. This terminal is a precise and fast input module. It is designed to connect load cells, force transducers, mass pressure transducers, and similar devices. The terminal is based on strain gauges. You can connect the strain gauges using 6- or 4-conductor technology. The measured value can be output directly on a weight display via a serial interface. There are two options for data exchange: - via process data - via PCP Compact (both inputs in the "Analog Values" PCP object) The measured values are represented by standardized 16-bit values.

## Your advantages

- 2 high-precision inputs for strain gauges
- Measuring ranges adjusted with nominal characteristic values upon delivery
- Manual entry of characteristic values
- Process data update can be parameterized in increments between 200  $\mu$ s and 100 ms
- Path adjustment in the process environment
- 2-point adjustment
- Connection of strain gauges in 6- and 4-conductor technology
- Advanced wire-break detection
- Sensor supply of up to 115 mA (8 load cells with 350  $\Omega$  per channel)
- Per channel: low-resistance, floating N/O contact
- The channels are parameterized independently of one another via the bus system
- Tara device
- Serial interface for external weight displays
- Status message when zero point is reached and resting of measured value

## Commercial data

Item number	2702373
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DR01
Product key	DRI144
GTIN	4055626228464

# IB IL SGI 2/P/EF-PAC - Analog module



2702373

<https://www.phoenixcontact.com/us/products/2702373>

Weight per piece (including packing)	232 g
Weight per piece (excluding packing)	241 g
Customs tariff number	85389099
Country of origin	DE


# IB IL SGI 2/P/EF-PAC - Analog module

2702373

<https://www.phoenixcontact.com/us/products/2702373>

## Technical data

### Dimensions

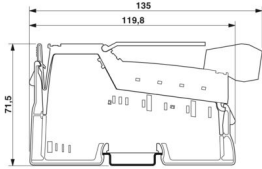Dimensional drawing	
Width	48.8 mm
Height	136 mm
Depth	71.5 mm

### Notes

#### Note on application

Note on application	Only for industrial use
---------------------	-------------------------

### Material specifications

Color (Housing)	green (RAL 6021)
-----------------	------------------

### Interfaces

#### Inline local bus

Connection method	Inline data jumper
Transmission speed	500 kbps
Transmission physics	Copper

#### Serial

Designation	V.24 (RS-485) serial interface
Addressing	Address 1 = Measured gross/net value
	Address 2 = Measured tare value
Termination resistor	120 Ω
Transmission protocol	STX/ETX

### System properties

#### Programming data (LocalbusSlave)

Length code (hex)	03
ID code (dec.)	223
Length code (dec)	03
Process data channel	48 bit
Input address area	6 Byte
Output address area	6 Byte
Parameter channel (PCP)	2 Byte

# IB IL SGI 2/P/EF-PAC - Analog module



2702373

<https://www.phoenixcontact.com/us/products/2702373>

Register length (bus)	64 bit
Fieldbus data telegram (PROFIBUS)	
Required parameter data	23 Byte
Required configuration data	5 Byte

## Input data

### Analog

Description of the input	Input channels for strain gauge
Number of inputs	2
Connection technology	6 or 4-wire, twisted pair shielded cable
Bridge difference $U_d$	Measuring range specified by selecting the characteristic
Bridge voltage $U_0$	5 V
Measured value representation	16 bit, 20 bit, ASCII data record
Characteristics	$\pm 1$ mV/V, $\pm 2$ mV/V, $\pm 3$ mV/V, $\pm 3.33$ mV/V, $\pm 4$ mV/V, $\pm 5$ mV/V, $\pm 6$ mV/V, manual characteristic value specification

### Contacts

Description	Floating N/O contact
Quantity	2 ( $K_{a1}$ - $K_{b1}$ , $K_{a2}$ - $K_{b2}$ )
Contact resistance	< 1 $\Omega$ (typical) 3 $\Omega$ (maximum)
Typical response time	typ. 0.2 ms (opening) typ. 2 ms (close)

## Output data

### Analog

Output description	Jumper supply
Number of outputs	2
Impedance	> 43 $\Omega$ (per channel)
Output voltage	typ. 5 V
Output current	max. 115 mA (per channel)

## Product properties

Product type	I/O component
Product family	Inline
Type	modular
Scope of supply	including Inline connectors and marking fields
Operating mode	Process data operation with 3 words, PCP with 1 word
Special properties	2 precise and fast inputs 4-, 6-conductor connection technology
Diagnostics messages	Failure of the power supply at $U_{ANA}$ Error message in the process data Failure of or insufficient communications power $U_L$ I/O error message sent to the bus coupler

# IB IL SGI 2/P/EF-PAC - Analog module



2702373

<https://www.phoenixcontact.com/us/products/2702373>

	I/O error Error message in the process data
Insulation characteristics	
Overvoltage category	II (IEC 60664-1, EN 60664-1)
Pollution degree	2 (IEC 60664-1, EN 60664-1)

## Electrical properties

Maximum power dissipation for nominal condition	2.35 W
---	--------

### Potentials: Communications power ( $U_L$ )

Supply voltage	7.5 V DC (via voltage jumper)
Current draw	max. 95 mA
	typ. 80 mA

### Potentials: Supply of analog modules ( $U_{ANA}$ )

Supply voltage	24 V DC (via voltage jumper)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	typ. 32 mA (in case of typical load of 350 Ohm per channel)
	115 mA (with maximum load of 43 $\Omega$ and display)
	14 mA (for no-load operation without strain gauge or display)

### Electrical isolation/isolation of the voltage ranges

Test voltage: Logic	500 V AC, 50 Hz, 1 min
Test voltage: Analog I/O	500 V AC, 50 Hz, 1 min
Test voltage: RS-485	500 V AC, 50 Hz, 1 min
Test voltage: N/O contact $K_{a1}$ - $K_{b1}$	500 V AC, 50 Hz, 1 min
Test voltage: N/O contact $K_{a2}$ - $K_{b2}$	500 V AC, 50 Hz, 1 min
Test voltage: Functional ground	500 V AC, 50 Hz, 1 min

## Connection data

### Connection technology

Connection name	Inline connector
-----------------	------------------

### Inline connector

Connection method	Spring-cage connection
Conductor cross-section, rigid	0.08 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross-section, flexible	0.08 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross-section AWG	28 ... 16
Stripping length	8 mm

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Degree of protection	IP20
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)

# IB IL SGI 2/P/EF-PAC - Analog module



2702373

<https://www.phoenixcontact.com/us/products/2702373>

Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 95 % (non-condensing)

## Mechanical test

Vibration resistance in accordance with EN 60068-2-6/IEC 60068-2-6	5g
Shock in accordance with EN 60068-2-27/IEC 60068-2-27	25g

## Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

## Mounting

Mounting type	DIN rail mounting
---------------	-------------------


# IB IL SGI 2/P/EF-PAC - Analog module

2702373


<https://www.phoenixcontact.com/us/products/2702373>

## Drawings

Dimensional drawing

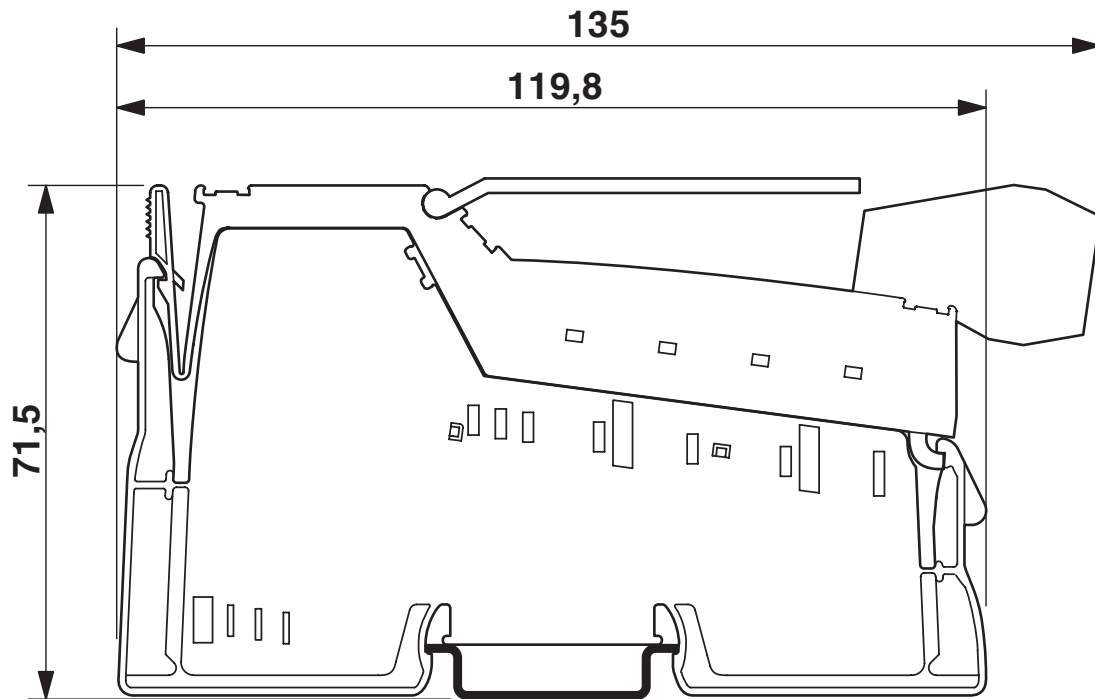

Connection diagram

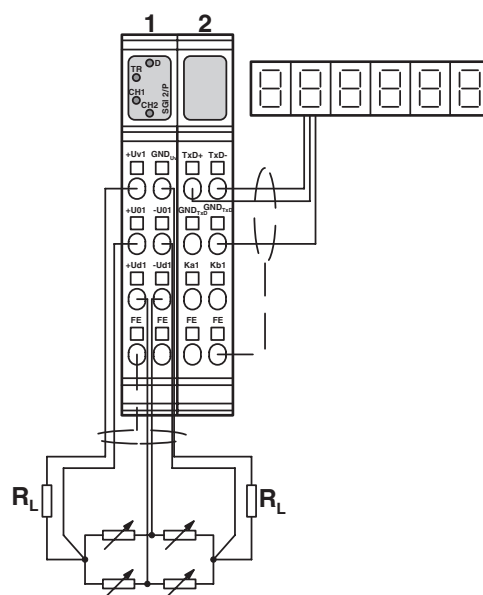


# IB IL SGI 2/P/EF-PAC - Analog module

2702373

<https://www.phoenixcontact.com/us/products/2702373>

### Block diagram

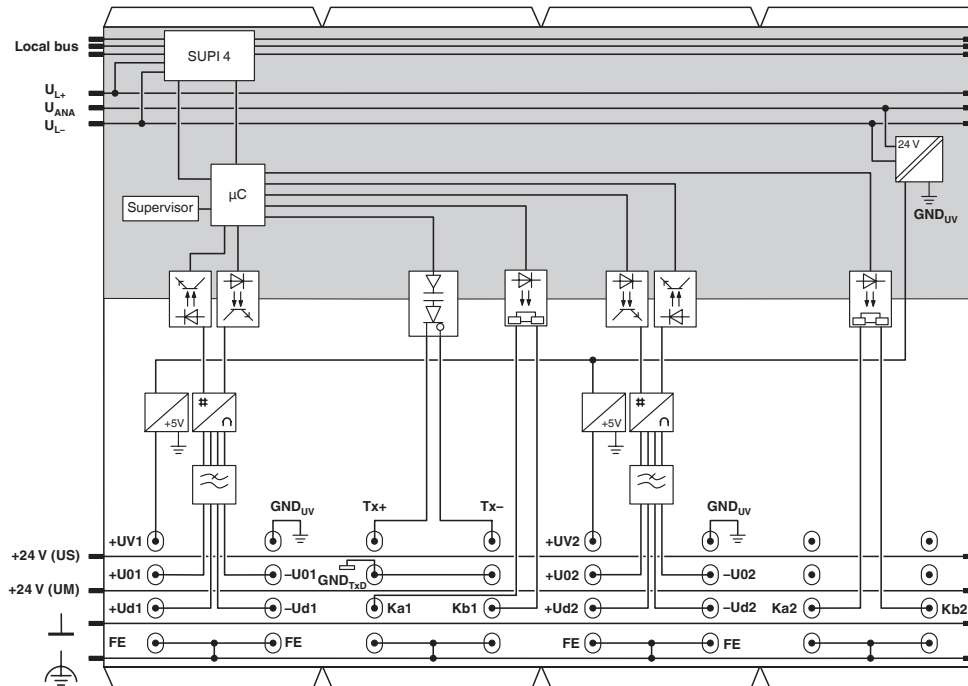

# IB IL SGI 2/P/EF-PAC - Analog module



2702373

<https://www.phoenixcontact.com/us/products/2702373>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2702373>



**cULus Listed**

Approval ID: E140324

# IB IL SGI 2/P/EF-PAC - Analog module



2702373

<https://www.phoenixcontact.com/us/products/2702373>

## Classifications

### ECLASS

ECLASS-13.0	27242601
ECLASS-15.0	27242601

### ETIM

ETIM 10.0	EC001596
-----------	----------

### UNSPSC

UNSPSC 21.0	32151600
-------------	----------

# IB IL SGI 2/P/EF-PAC - Analog module



2702373

<https://www.phoenixcontact.com/us/products/2702373>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	7d76b1d0-aa25-4208-b081-52777d7f7519

### EF3.1 Climate Change

CO2e kg	7.97 kg CO2e
---------	--------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)