

# FLS DN M12 DI 8 M12 - Distributed I/O device



2736068

<https://www.phoenixcontact.com/us/products/2736068>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



The stand-alone device for DeviceNet™ has 8 digital inputs. The M12 connection is established using fast connection technology. The 24 V DC supply is protected against short circuit and overload. The nominal current of the device is 600 mA.

## Your advantages

- Directly accessible address encoding switch
- Consistent connection via M12 connectors
- Short-circuit and overload protection
- SPEEDCON fast locking system
- Diagnostic and status indicators
- Flexible power supply concept

## Commercial data

Item number	2736068
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	DR03
Product key	DRI4A4
GTIN	4017918899622
Weight per piece (including packing)	341 g
Weight per piece (excluding packing)	310 g
Customs tariff number	85176200
Country of origin	DE

## Technical data

### Dimensions

Width	60 mm
Height	161 mm
Depth	44.5 mm
Drill hole spacing	151 mm

### Notes

#### Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

### Interfaces

#### DeviceNet™

Connection method	2 M12 connectors, A-coded
Number of positions	5
Transmission speed	125 kbps, 250 kbps, 500 kbps (Automatic baud rate detection)
Transmission physics	Copper cable in acc. with DeviceNet™ specification
Address area assignment	0 ... 63, can be set

### System properties

#### System limits

Number of local bus devices that can be connected	0
Number of devices with parameter channel	0

#### Programming data

Input address area	8 bit
Output address area	0 bit
Register length (bus)	8 bit

### Input data

#### Digital:

Input name	Digital inputs
Description of the input	IEC 61131-2 type 1
Number of inputs	8
Connection method	M12 connector
Connection technology	2-, 3-, 4-conductor
Input voltage	24 V DC
Input voltage range "0" signal	-30 V DC ... 5 V DC
Input voltage range "1" signal	13 V DC ... 30 V DC
Nominal input voltage $U_{IN}$	24 V DC

# FLS DN M12 DI 8 M12 - Distributed I/O device



2736068

<https://www.phoenixcontact.com/us/products/2736068>

Filter time	3 ms
Protective circuit	Reverse polarity protection

## Product properties

Product type	I/O component
Product family	Fieldline
Type	Block design
No. of channels	8

## Electrical properties

### Potentials

Voltage supply $U_L$	24 V DC
Power supply at $U_L$	max. 4 A
Current consumption from $U_L$	typ. 65 mA max. 100 mA
Voltage supply $U_S$	24 V DC
Power supply at $U_S$	max. 4 A
Current consumption from $U_S$	typ. 5 mA (plus sensor current) max. 700 mA

### Supply: Module electronics

Connection method	M12 connector, A-coded
Designation	$U_L$
Supply voltage	24 V DC
Supply voltage range	11 V DC ... 30 V DC (including ripple)

### Electrical isolation/isolation of the voltage ranges

Test voltage: 24 V supply (bus logics) / Digital inputs (sensor supply)	500 V AC, 50 Hz, 1 min
Test voltage: FE / Digital inputs (sensor supply)	500 V AC, 50 Hz, 1 min

## Connection data

Connection method	M12 connector
-------------------	---------------

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Degree of protection	IP65/IP67
Air pressure (operation)	80 kPa ... 106 kPa (up to 2000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (storage/transport)	95 %

### Mechanical test

Shock in accordance with EN 60068-2-27/IEC 60068-2-27	Load 30g, half sine wave, positive and negative per direction
---	---

# FLS DN M12 DI 8 M12 - Distributed I/O device



2736068

<https://www.phoenixcontact.com/us/products/2736068>

## Standards and regulations

Protection class

III (IEC 61140, EN 61140, VDE 0140-1)

## Mounting

Mounting type

Panel mounting


# FLS DN M12 DI 8 M12 - Distributed I/O device

2736068

<https://www.phoenixcontact.com/us/products/2736068>

## Drawings

Connection diagram

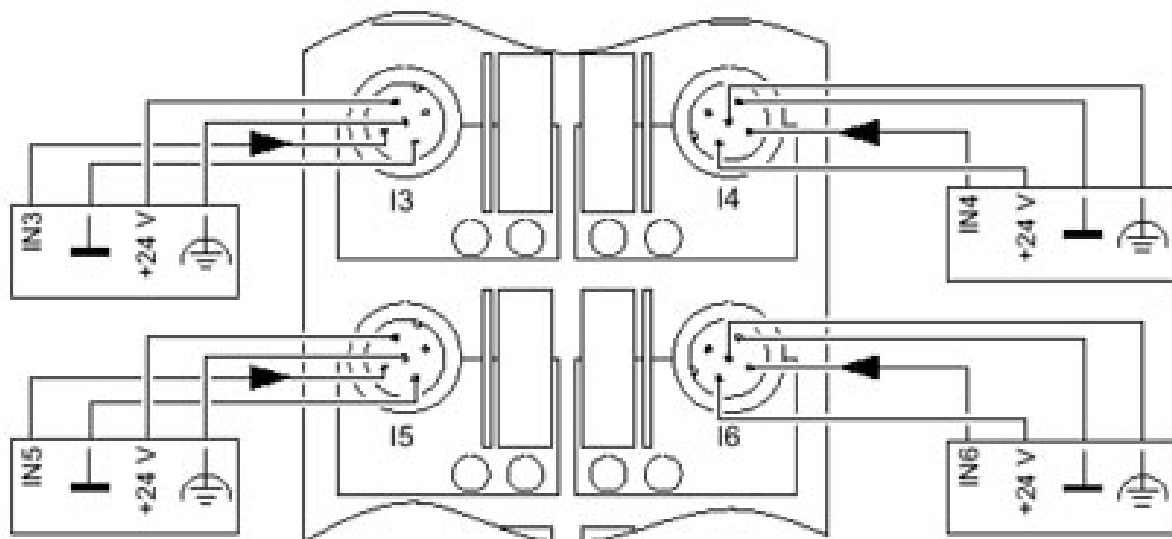

# FLS DN M12 DI 8 M12 - Distributed I/O device



2736068

<https://www.phoenixcontact.com/us/products/2736068>

## Environmental product compliance

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)