

# FLS CO M12 DI 16 M12 - Distributed I/O device



2736479

<https://www.phoenixcontact.com/us/products/2736479>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



The stand-alone device for CANopen® has 16 digital inputs. The M12 connection is established using fast connection technology. The 24 V DC supply is protected against short circuit and overload. The nominal current of the device is 1.2 A.

## Your advantages

- Directly accessible address encoding switch
- Consistent connection via M12 connectors
- Diagnostic and status indicators
- SPEEDCON fast locking system
- Short-circuit and overload protection
- Flexible power supply concept

## Commercial data

Item number	2736479
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	DR03
Product key	DRI4A3
GTIN	4017918974268
Weight per piece (including packing)	339.4 g
Weight per piece (excluding packing)	310 g
Customs tariff number	85176200
Country of origin	CN

# FLS CO M12 DI 16 M12 - Distributed I/O device




2736479

<https://www.phoenixcontact.com/us/products/2736479>

## Technical data

### Dimensions

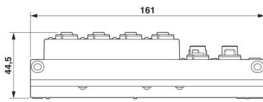Dimensional drawing	
Width	60 mm
Height	161 mm
Depth	44.5 mm
Drill hole spacing	151 mm

### Interfaces

#### CANopen®

Connection method	2 M12 connectors, A-coded
Number of positions	5
Transmission speed	10, 20, 50, 125, 250, 500, 1000 kBit/s (Automatic baud rate detection)
Transmission physics	Copper cable with optional power supply in acc. with CAN standard
Address area assignment	1 ... 126, adjustable

### System properties

#### System limits

Number of local bus devices that can be connected	0
Number of devices with parameter channel	0

#### Programming data

Input address area	16 bit
Output address area	0 bit
Parameter channel (PCP)	0 bit
Register length (bus)	16 bit

### Input data

#### Digital:

Input name	Digital inputs
Description of the input	IEC 61131-2 type 1
Number of inputs	16
Connection method	M12 connector double occupancy
Connection technology	2-, 3-, 4-conductor
Input voltage	24 V DC

# FLS CO M12 DI 16 M12 - Distributed I/O device



2736479

<https://www.phoenixcontact.com/us/products/2736479>

Input voltage range "0" signal	-30 V DC ... 5 V DC
Input voltage range "1" signal	13 V DC ... 30 V DC
Nominal input voltage $U_{IN}$	24 V DC
Filter time	1 ms
Protective circuit	Reverse polarity protection

## Product properties

Product type	I/O component
Product family	Fieldline
Type	Block design
No. of channels	16

## Electrical properties

### Potentials

Voltage supply $U_L$	24 V DC
Power supply at $U_L$	max. 4 A
Current consumption from $U_L$	typ. 65 mA
	max. 100 mA
Voltage supply $U_S$	24 V DC
Power supply at $U_S$	max. 4 A
Current consumption from $U_S$	typ. 8 mA (plus sensor current)
	max. 1.2 A

### Supply: Module electronics

Connection method	M12 connector, A-coded
Designation	$U_L$
Supply voltage	24 V DC
Supply voltage range	18 V DC ... 30 V DC (including ripple)

### Electrical isolation/isolation of the voltage ranges

Test voltage: 24 V supply (bus logics) / Digital inputs (sensor supply / I/O)	500 V AC, 50 Hz, 1 min
Test voltage: FE / Digital inputs (sensor supply)	500 V AC, 50 Hz, 1 min

## Connection data

Connection method	M12 connector
-------------------	---------------

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Degree of protection	IP65/IP67
Air pressure (operation)	80 kPa ... 106 kPa (up to 2000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (storage/transport)	95 %

# FLS CO M12 DI 16 M12 - Distributed I/O device



2736479

<https://www.phoenixcontact.com/us/products/2736479>

## Standards and regulations

Protection class

III (IEC 61140, EN 61140, VDE 0140-1)

## Mounting

Mounting type

Panel mounting

# FLS CO M12 DI 16 M12 - Distributed I/O device




2736479

<https://www.phoenixcontact.com/us/products/2736479>

## Drawings

Dimensional drawing

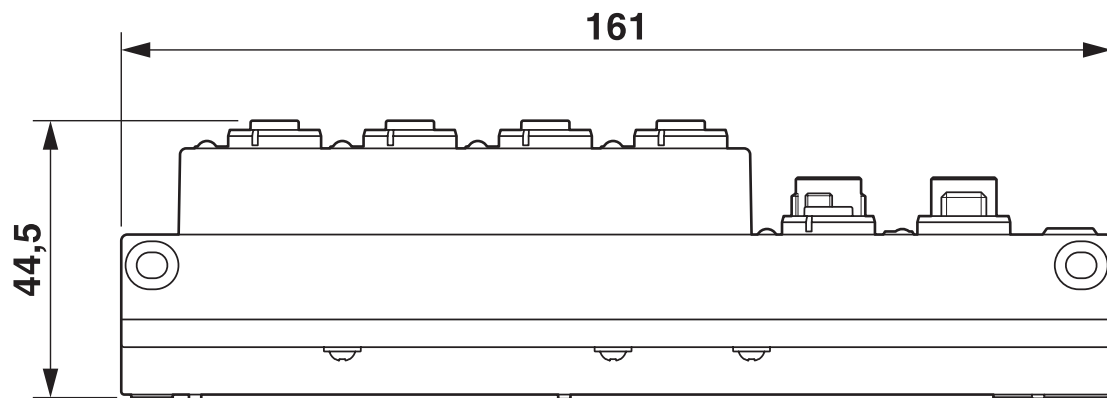


# FLS CO M12 DI 16 M12 - Distributed I/O device



2736479

<https://www.phoenixcontact.com/us/products/2736479>

Connection diagram

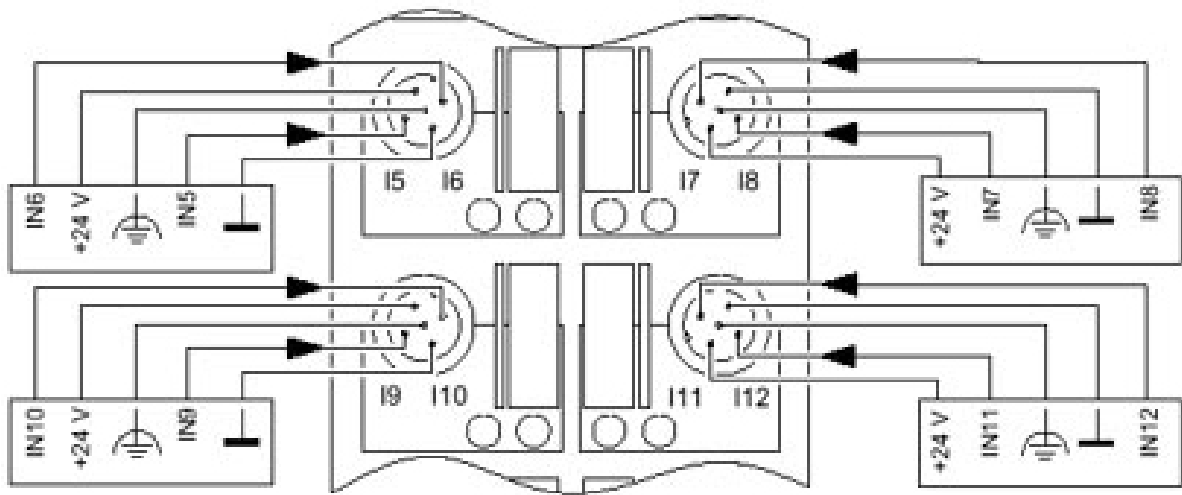

# FLS CO M12 DI 16 M12 - Distributed I/O device



2736479

<https://www.phoenixcontact.com/us/products/2736479>

## Classifications

### UNSPSC

UNSPSC 21.0	32151602
-------------	----------

2736479

<https://www.phoenixcontact.com/us/products/2736479>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
-------------------------------------	----------------------

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)