


PSM-LWL-HCS-RUGGED-200/230 - FO cable



2799885

<https://www.phoenixcontact.com/us/products/2799885>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



PCF cable, duplex 200 µm/230 µm, by the meter without male connector, for installation in stationary systems and machines

Your advantages

- Robust installation cable for installation in stationary systems and machines
- For indoors
- 2.9 mm individual wires made from highly flexible FRNC material
- Highly tear-resistant aramid strain relief elements
- Rugged polyurethane (PUR) outer sheath
- Halogen-free, ozone, and UV resistant

Commercial data

Item number	2799885
Packing unit	1 m
Minimum order quantity	1 m
Note	Made to order (non-returnable)
Sales key	DN06
Product key	DNC232
GTIN	4017918074159
Weight per piece (including packing)	47 g
Weight per piece (excluding packing)	47 g
Customs tariff number	85447000
Country of origin	DE

PSM-LWL-HCS-RUGGED-200/230 - FO cable



2799885

<https://www.phoenixcontact.com/us/products/2799885>

Technical data

Notes

Note on application

Note on application	Only for industrial use
---------------------	-------------------------

Product properties

Product type	Data cable by the meter
Tensile strength GRP	1000 N (Short-term)
	200 N (permanent)

Electrical properties

Transmission medium	PCF fiber
---------------------	-----------

Interfaces

Signal	INTERBUS
	PROFIBUS
	Point-to-point
	Ethernet
	RS-485

Dimensions

External dimensions

External diameter min.	7.5 mm
External diameter max.	8.5 mm

Material specifications

Color (Outer sheath)	orange (RAL 2003)
Color (Single-core wire)	red (RAL 3001)
	green (RAL 6021)
Outer sheath, material	PUR

Cable/line

Cable length	Free input (1.0 ... 2000 m)
Cable weight	54 kg/km
Cable abbreviation	I-VH11Y 2K200/230 HCS
External cable diameter	8 mm
Outer sheath, material	PUR
Single wire, number of litz wires	2
Single wire, material	FRNC material
Individual wire diameter	2.9 mm ±0.1 mm
Numerical aperture	0.37
Bending radius, single element	30 mm (Short-term)

PSM-LWL-HCS-RUGGED-200/230 - FO cable



2799885

<https://www.phoenixcontact.com/us/products/2799885>

	30 mm (Short-term)
Bending radius, entire cable	60 mm (Short-term)
	60 mm (Short-term)
Bending radius	30 mm (Short-term)
	50 mm (permanent)
	60 mm (Short-term)
	60 mm (permanent)
Tensile strength	1000 N (Short-term)
	200 N (permanent)
Impact strength	2 Nm / 10 x
660 nm	10 dB/km
850 nm	8 dB/km
Halogen-free	According to IEC 60754-2
Resistance to oil	IRM 902 No.2, 100 °C, DIN VDE 0473-811-2-1
Behavior in fire	1.72 MJ/m (0.48 kWh/m)

FO cable

Fiber	PCF, 200/230 µm
-------	-----------------

Environmental and real-life conditions

Ambient conditions

Impact strength	2 Nm / 10 x
Ambient temperature (operation)	-40 °C ... 70 °C
	-20 °C ... 70 °C (with quick mounting connector)
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (installation)	-20 °C ... 60 °C
Altitude	5000 m
Resistance to UV radiation	500 hours, in accordance with DIN EN ISO 4892-2
Resistance to oil	IRM 902 No.2, 100 °C, DIN VDE 0473-811-2-1

Standards and regulations


Behavior in fire	1.72 MJ/m (0.48 kWh/m)
Free from substances that could impair the application of coating	VDMA 24364:2018-05
Resistance to oil	IRM 902 No.2, 100 °C, DIN VDE 0473-811-2-1

Mounting

cable layer type	Indoors
------------------	---------

Drawings

Schematic diagram

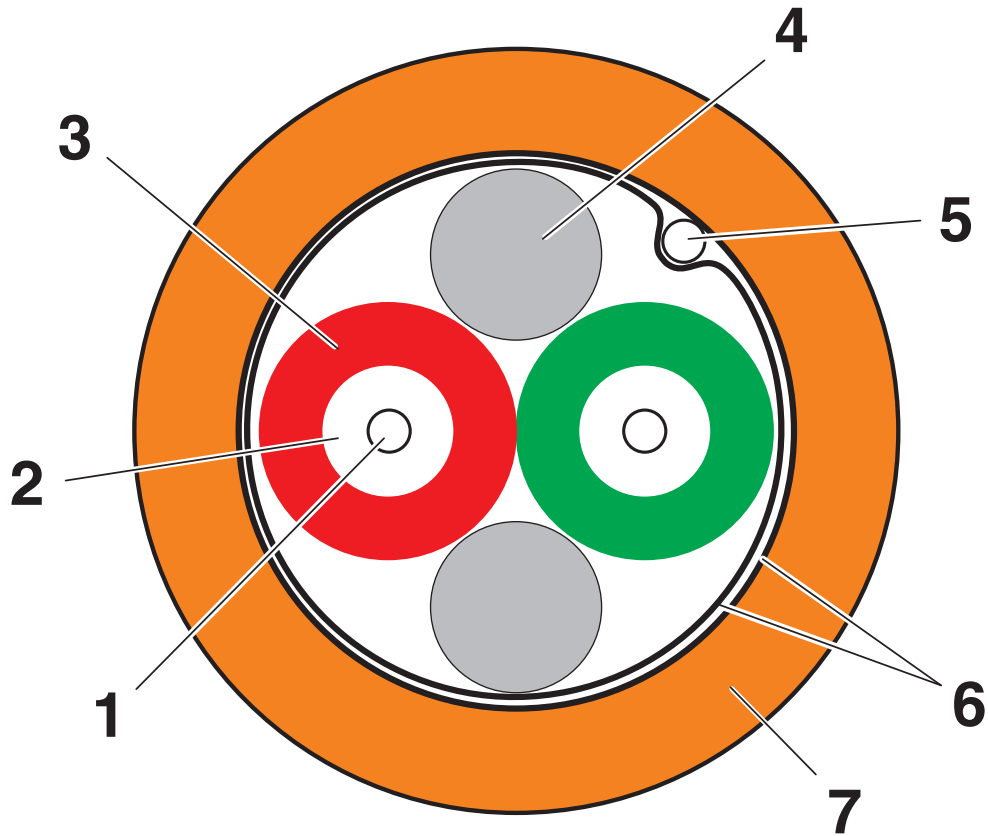

PSM-LWL-HCS-RUGGED-200/230 - FO cable



2799885

<https://www.phoenixcontact.com/us/products/2799885>

Classifications

ECLASS

ECLASS-13.0	27061803
ECLASS-15.0	27061803

ETIM

ETIM 10.0	EC000034
-----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

PSM-LWL-HCS-RUGGED-200/230 - FO cable



2799885

<https://www.phoenixcontact.com/us/products/2799885>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

EF3.1 Climate Change

CO2e kg	0.214 kg CO2e
---------	---------------

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com