# VAL-MS 1000DC-PV-ST - Type 2 surge protection plug

2800624

https://www.phoenixcontact.com/us/products/2800624

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Replacement plug for PV arrester combinations from the VAL-MS 1000DC-PV-... product range

## Your advantages

- Increased safety, thanks to compliance with standard EN 50539-11
- Reliable contact, thanks to integrated rotating latch
- Easy replacement, thanks to plug-in arresters
- Optimum inverter protection, thanks to low protection level
- Efficient replacement of defective plugs, thanks to visual status indicator
- Protection against mismatching, thanks to keyed plugs and base elements

## Commercial data

| | |
|---|---|
| Item number | 2800624 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | CL01 |
| Product key | CL1324 |
| GTIN | 4046356615099 |
| Weight per piece (including packing) | 74.6 g |
| Weight per piece (excluding packing) | 73 g |
| Customs tariff number | 85363090 |
| Country of origin | CN |

## Technical data

### Product properties

| | |
|---|---|
| Product type | Replacement plug |
| Product family | VALVETRAB MS |
| IEC test classification | PV II |
| | PV T2 |
| EN type | T2 |
| IEC power supply system | DC |
| Type | Male |
| Environment | Indoor |
| Installation location of the disconnect device | Internal |
| Accessibility | Accessible |
| End-of-life mode | OCFM (Open-Circuit Failure Mode) |
| Surge protection fault message | optical |


Insulation characteristics

| | |
|---|---|
| Overvoltage category | III |
| Pollution degree | 2 |

### Connection data

| | |
|---|---|
| Connection method | pluggable |

### Dimensions

| | |
|---|---|
| Dimensional drawing |   |
| Width | 17.5 mm |
| Height | 52.4 mm |
| Depth | 55.3 mm |
| Horizontal pitch | 1 HP |

### Material specifications

| | |
|---|---|
| Color | black (RAL 9005) |
| Flammability rating according to UL 94 | V-0 |
| CTI value of material | 600 |
| Insulating material | PA 6.6-FR |
| Material group | I |
| Housing material | PA 6.6-FR |

### Protective circuit

| | |
|---|---|
| Standby power consumption $P_C$ | ≤ 25 mVA |
| Nominal discharge current $I_n$ (8/20) µs | 15 kA |
| Maximum discharge current $I_{max}$ (8/20) µs | 40 kA |
| Voltage protection level $U_p$ | ≤ 1.9 kV |
| Residual voltage $U_{res}$ | ≤ 1.9 kV (at $I_n$) |
| | ≤ 1.5 kV (at 5 kA) |
| | ≤ 1.7 kV (at 10 kA) |
| | ≤ 2 kV (at 20 kA) |
| | ≤ 2.3 kV (at 30 kA) |
| | ≤ 2.5 kV (at 40 kA) |
| Response time $t_A$ | ≤ 25 ns |

Protective circuit DC voltage side (DC)

| | |
|---|---|
| Maximum continuous operating voltage $U_{CPV}$ | 585 V DC |
| Short-circuit current rating $I_{SCPV}$ | 2000 A |
| Open-circuit voltage $U_{OCSTC}$ | ≤ 487.5 V DC |
| Maximum discharge current $I_{max}$ (8/20) µs | 40 kA |
| Response time $t_A$ | ≤ 25 ns |
| Insulation resistance $R_{iso}$ | > 5 GΩ (at 500 V DC) |
| Nominal discharge current $I_n$ (8/20) µs | 15 kA |
| Continuous operating current $I_{CPV}$ | < 20 µA |
| Maximum continuous operating voltage $U_{CPV}$ | 585 V DC |
| Short-circuit current rating $I_{SCPV}$ | 2000 A |
| Residual voltage $U_{res}$ | ≤ 1.9 kV (at $I_n$) |
| | ≤ 1.5 kV (at 5 kA) |
| | ≤ 1.7 kV (at 10 kA) |
| | ≤ 2 kV (at 20 kA) |
| | ≤ 2.3 kV (at 30 kA) |
| | ≤ 2.5 kV (at 40 kA) |
| Voltage protection level $U_p$ | ≤ 1.9 kV |
| Standby power consumption $P_C$ | ≤ 25 mVA |

## Environmental and real-life conditions

Ambient conditions

| | |
|---|---|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -40 °C ... 80 °C |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C |
| Altitude | ≤ 2000 m (amsl) |
| Permissible humidity (operation) | 5 % ... 95 % |
| Shock (operation) | 60g (Half-sine / 11 ms / 3x ±X, ±Y, ±Z) |
| Vibration (operation) | 7.5g (5-500 Hz/2.5 h/XYZ) |

## Approvals

UL specifications

| | |
|---|---|
| Maximum continuous operating voltage MCOV | 1170 V DC |
| Short-circuit current rating (SCCR) | 50 kA |
| Voltage protection rating VPR | 3 kV |
| Nominal discharge current $I_n$ | 10 kA |
| Mode of protection | (L+) - (L-) |
| | (L+) - G |
| | (L-) - G |
| Nominal voltage | 1170 V DC |
| Power distribution system | DC PV |
| SPD Type | 1CA |

## Standards and regulations


| | |
|---|---|
| Standards/specifications | EN 61643-31 |
| Note | 2019 |
| Standards/specifications | IEC 61643-31 |
| Note | 2018 |

## Mounting

| | |
|---|---|
| Mounting type | on base element |

## Drawings

Dimensional drawing

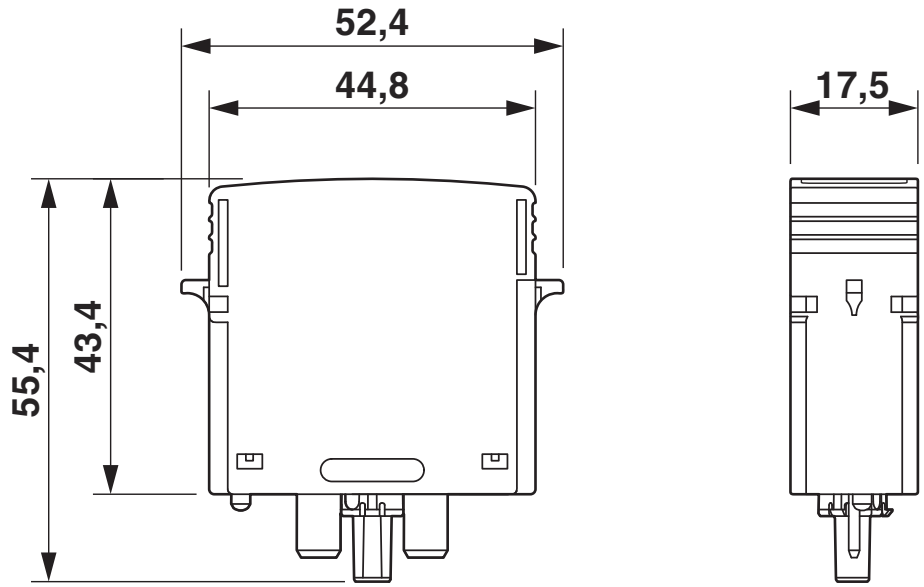


Circuit diagram



## Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2800624

**cUL Recognized**
Approval ID: FILE E 330181

**UL Recognized**
Approval ID: FILE E 330181

**KEMA-KEUR**
Approval ID: 71-123544 REV.3

**IECEE CB Scheme**
Approval ID: NL-81006/A1

**CCA**
Approval ID: NTR-NL 7937

## Classifications

### ECLASS

| | |
|---|---|
| ECLASS-13.0 | 27171492 |
| ECLASS-15.0 | 27171492 |

### ETIM

| | |
|---|---|
| ETIM 10.0 | EC002496 |

### UNSPSC

| | |
|---|---|
| UNSPSC 21.0 | 39121620 |

## Environmental product compliance

EU RoHS

| | |
|---|---|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |

China RoHS

| | |
|---|---|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|---|---|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

Phoenix Contact 2026 © - all rights reserved
https://www.phoenixcontact.com

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com