

VAL-MS-T1/T2 1000DCPV-UD-ST - Type 1/2 surge protection plug



2801231

<https://www.phoenixcontact.com/us/products/2801231>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Replacement plug for PV arrester combinations from the VAL-MS-T1/T2 1000DC-PV-... product range

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2801231 |
| Packing unit | 1 pc |
| Minimum order quantity | 10 pc |
| Sales key | CL01 |
| Product key | CL1324 |
| GTIN | 4046356749220 |
| Weight per piece (including packing) | 94.7 g |
| Weight per piece (excluding packing) | 94.7 g |
| Customs tariff number | 85363030 |
| Country of origin | DE |

VAL-MS-T1/T2 1000DCPV-UD-ST - Type 1/2 surge protection plug



2801231

<https://www.phoenixcontact.com/us/products/2801231>

Technical data

Product properties

| | |
|--|----------------------------------|
| Product type | Replacement plug |
| Product family | VALVETRAB MS |
| IEC test classification | PV T1 PV T2 |
| EN type | T1 / T2 |
| IEC power supply system | DC |
| Type | Male |
| Number of positions | 1 |
| Environment | Indoor |
| Installation location of the disconnect device | Internal |
| Accessibility | Accessible |
| End-of-life mode | OCFM (Open-Circuit Failure Mode) |
| Surge protection fault message | optical |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Pollution degree | 2 |

Electrical properties


Indicator/remote signaling

| | |
|----------------------------|--------------|
| Max. required back-up fuse | not required |
|----------------------------|--------------|

Connection data

| | |
|-------------------|-----------|
| Connection method | pluggable |
|-------------------|-----------|

Dimensions
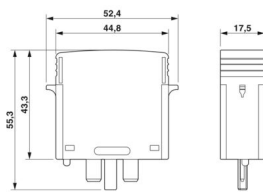
| | |
|---------------------|--|
| Dimensional drawing |  |
| Width | 17.5 mm |
| Height | 52.4 mm |
| Depth | 55.3 mm |
| Horizontal pitch | 1 Div. |

Material specifications

| | |
|-------|------------------|
| Color | black (RAL 9005) |
|-------|------------------|

VAL-MS-T1/T2 1000DCPV-UD-ST - Type 1/2 surge protection plug



2801231

<https://www.phoenixcontact.com/us/products/2801231>

| | |
|--|-----------|
| Flammability rating according to UL 94 | V-0 |
| CTI value of material | 600 |
| Insulating material | PA 6.6-FR |
| Material group | I |
| Housing material | PA 6.6-FR |

Protective circuit

| | |
|--|-------------------------------|
| Direction of action | (L+)-PE & (L-)-PE & (L+)-(L-) |
| Standby power consumption P_C | ≤ 25 mVA |
| Nominal discharge current I_n (8/20) μ s | 15 kA |
| Maximum discharge current I_{max} (8/20) μ s | 40 kA |
| Impulse discharge current (10/350) μ s, charge | 2.5 As |
| Impulse discharge current (10/350) μ s, specific energy | 6.25 kJ/ Ω |
| Impulse discharge current (10/350) μ s, peak value I_{imp} | 5 kA |
| Voltage protection level U_p | ≤ 1.8 kV |
| Residual voltage U_{res} | ≤ 1.8 kV (at I_n) |
| | ≤ 1.5 kV (at 5 kA) |
| | ≤ 1.7 kV (at 10 kA) |
| | ≤ 1.9 kV (at 20 kA) |
| | ≤ 2.2 kV (at 30 kA) |
| | ≤ 2.4 kV (at 40 kA) |
| Response time t_A | ≤ 25 ns |

Protective circuit DC voltage side (DC)

| | |
|--|--------------------------------|
| Maximum continuous operating voltage U_{CPV} | 585 V DC |
| Short-circuit current rating I_{SCPV} | 2000 A |
| Open-circuit voltage U_{OCSTC} | ≤ 487.5 V DC |
| Maximum discharge current I_{max} (8/20) μ s | 40 kA |
| Response time t_A | ≤ 25 ns |
| Impulse discharge current (10/350) μ s, charge | 2.5 As |
| Impulse discharge current (10/350) μ s, specific energy | 6.25 kJ/ Ω |
| Impulse discharge current (10/350) μ s, peak value I_{imp} | 5 kA |
| Insulation resistance R_{iso} | > 5 G Ω (at 500 V DC) |
| Nominal discharge current I_n (8/20) μ s | 15 kA |
| Continuous operating current I_{CPV} | < 20 μ A |
| Maximum continuous operating voltage U_{CPV} | 585 V DC |
| Short-circuit current rating I_{SCPV} | 2000 A |
| Residual voltage U_{res} | ≤ 1.8 kV (at I_n) |
| | ≤ 1.5 kV (at 5 kA) |
| | ≤ 1.7 kV (at 10 kA) |
| | ≤ 1.9 kV (at 20 kA) |
| | ≤ 2.2 kV (at 30 kA) |
| | ≤ 2.4 kV (at 40 kA) |

VAL-MS-T1/T2 1000DCPV-UD-ST - Type 1/2 surge protection plug



2801231

<https://www.phoenixcontact.com/us/products/2801231>

| | |
|---------------------------------|---------------|
| Voltage protection level U_p | ≤ 1.8 kV |
| Standby power consumption P_C | ≤ 25 mVA |

Environmental and real-life conditions

Ambient conditions

| | |
|---|---|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -40 °C ... 80 °C |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C |
| Altitude | ≤ 2000 m (amsl) |
| Permissible humidity (operation) | 5 % ... 95 % |
| Shock (operation) | 60g (Half-sine / 11 ms / 3x $\pm X$, $\pm Y$, $\pm Z$) |
| Vibration (operation) | 7.5g (5-500 Hz/2.5 h/XYZ) |

Approvals

UL specifications

| | |
|--|--------------|
| Maximum continuous operating voltage MCOV (L+) - G | 1050 V DC |
| Nominal discharge current I_n (L+) - G | 20 kA |
| Mode of protection | (L+) - G |
| Nominal voltage | 875 V DC |
| Power distribution system | Single phase |
| Measured limiting voltage MLV (L+) - G | 1900 V |
| SPD Type | 4CA |

Standards and regulations

| | |
|--------------------------|--------------|
| Standards/specifications | EN 61643-31 |
| Note | 2019 |
| Standards/specifications | IEC 61643-31 |
| Note | 2018 |

Mounting

| | |
|---------------|-----------------|
| Mounting type | on base element |
|---------------|-----------------|


VAL-MS-T1/T2 1000DCPV-UD-ST - Type 1/2 surge protection plug



2801231

<https://www.phoenixcontact.com/us/products/2801231>

Drawings

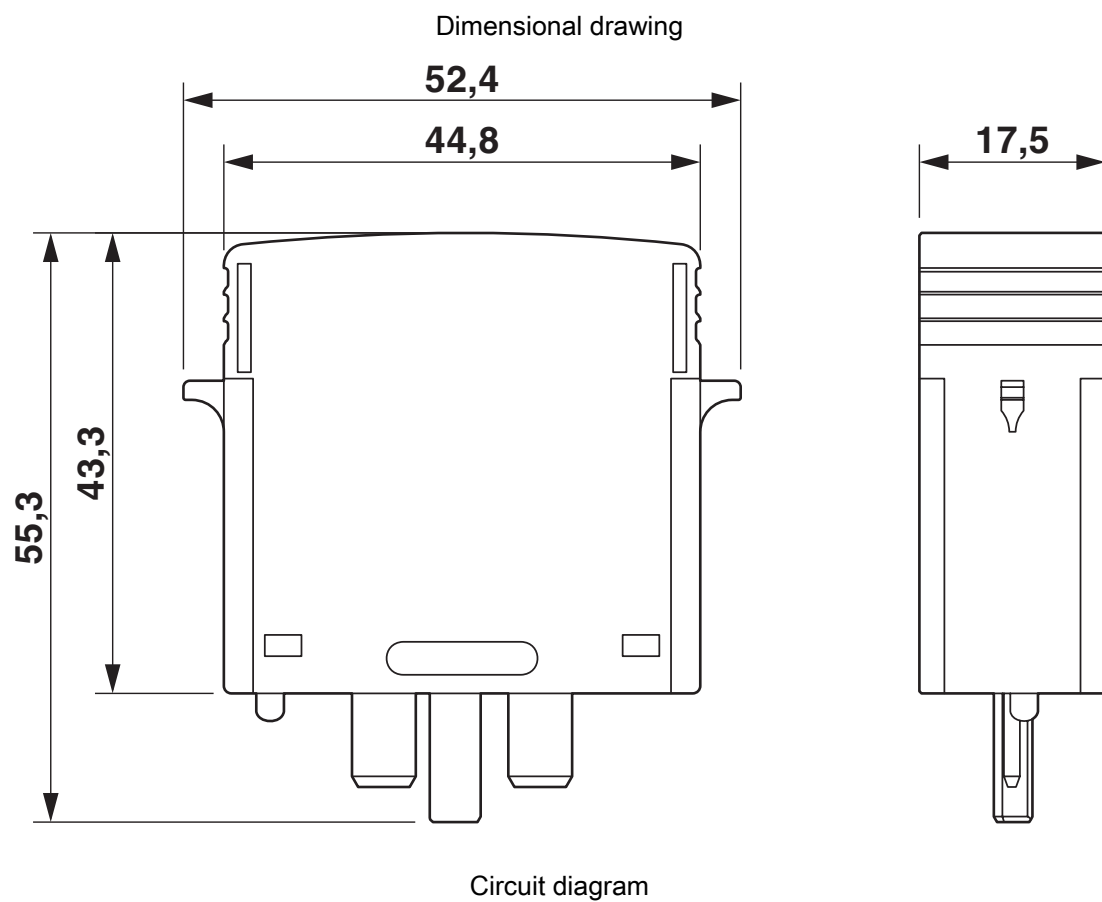

VAL-MS-T1/T2 1000DCPV-UD-ST - Type 1/2 surge protection plug



2801231

<https://www.phoenixcontact.com/us/products/2801231>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2801231>



KEMA-KEUR

Approval ID: 71-123544 REV.3



IECEE CB Scheme

Approval ID: NL-81006/A1

CCA

Approval ID: NTR-NL 7937

UAE-RoHS

Approval ID: 23-10-88705

VAL-MS-T1/T2 1000DCPV-UD-ST - Type 1/2 surge protection plug



2801231

<https://www.phoenixcontact.com/us/products/2801231>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27171492 |
| ECLASS-15.0 | 27171492 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC002496 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121620 |
|-------------|----------|

VAL-MS-T1/T2 1000DCPV-UD-ST - Type 1/2 surge protection plug



2801231

<https://www.phoenixcontact.com/us/products/2801231>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com