

CN-UB-70DC-6-SB - Surge protection device



2803153

<https://www.phoenixcontact.com/us/products/2803153>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Attachment plug with surge protection for coaxial signal interfaces. Connection: N connector, male/female

'BB' version shown

Your advantages

- Mounting plate enables mounting, e.g., in a control cabinet

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 2803153 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | CL25 |
| Product key | CL3311 |
| GTIN | 4046356293204 |
| Weight per piece (including packing) | 83.1 g |
| Weight per piece (excluding packing) | 83.1 g |
| Customs tariff number | 85363010 |
| Country of origin | US |

CN-UB-70DC-6-SB - Surge protection device



2803153

<https://www.phoenixcontact.com/us/products/2803153>

Technical data

Notes

General

| | |
|------|---|
| Note | To meet the discharge conditions for DC voltages, please note the following information: "The surge protective device should be used together with a transmitter unit, which shuts down in the event of a short-circuit." |
|------|---|


Product properties

| | |
|--------------------------------|--|
| Product type | Surge protection for transceiver systems |
| IEC test classification | C2 |
| | C3 |
| | D1 |
| VDE requirement class | C2 |
| | C3 |
| | D1 |
| Type | Intermediate plug |
| Surge protection fault message | none |

Connection data

| | |
|-------------------|------------------------------------|
| Connection method | N connector 50 Ω |
| Tightening torque | 1.4 Nm ... 1.7 Nm (N coupling nut) |

Dimensions
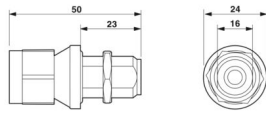
| | |
|---------------------|--|
| Dimensional drawing |  |
| Width | 24 mm |
| Height | 24 mm |
| Depth | 50 mm |

Material specifications

| | |
|----------------------------------|--------------|
| Color | nickel color |
| Seal material | Silicon |
| Housing material | Brass (CuZn) |
| Housing surface material | Ni |
| Inner conductor material | BeCu |
| Inner conductor surface material | Gold |
| Insulation body material | PTFE |

Mechanical properties

CN-UB-70DC-6-SB - Surge protection device



2803153

<https://www.phoenixcontact.com/us/products/2803153>

Mechanical data

| | |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

Protective circuit

| | |
|---|---|
| Direction of action | Line-Shield/Earth Ground |
| Maximum continuous operating voltage U_C | 70 V DC |
| | 50 V AC |
| Maximum continuous voltage U_C (line-earth) | 70 V DC |
| | 50 V AC |
| Rated current | 10 A |
| Operating effective current I_C at U_C | $\leq 1 \mu\text{A}$ |
| Nominal discharge current I_n (8/20) μs | 5 kA |
| Nominal discharge current I_n (8/20) μs (line-ground) | 5 kA |
| Nominal discharge current I_n (8/20) μs (line-shield) | 5 kA |
| Pulse discharge current I_{imp} (10/350) μs | 1 kA |
| Pulse discharge current I_{imp} (10/350) μs (line-earth) | 1 kA |
| Max. discharge current I_{max} (8/20) μs maximum (line-earth) | 10 kA |
| Max. discharge current I_{max} (8/20) μs maximum (line-shield) | 10 kA |
| Nominal pulse current I_{an} (10/1000) μs (line-shield) | 100 A |
| Impulse discharge current (10/350) μs , peak value I_{imp} | 1 kA |
| Output voltage limitation at 1 kV/ μs (line-earth) spike | $\leq 650 \text{ V}$ |
| Output voltage limitation at 1 kV/ μs (line-shield) spike | $\leq 650 \text{ V}$ |
| Output voltage limitation at 1 kV/ μs (line-earth) static | $\leq 650 \text{ V}$ |
| Output voltage limitation at 1 kV/ μs (line-shield) static | $\leq 650 \text{ V}$ |
| Voltage protection level U_p (line-earth) | $\leq 800 \text{ V}$ (C2 - 4 kV / 2 kA) |
| | $\leq 1 \text{ kV}$ (C2 - 10 kV / 5 kA) |
| Voltage protection level U_p (line-shield) | $\leq 800 \text{ V}$ (C2 - 4 kV / 2 kA) |
| | $\leq 1 \text{ kV}$ (C2 - 10 kV / 5 kA) |
| Response time t_A (line-earth) | $\leq 100 \text{ ns}$ |
| Response time t_A (line-shield) | $\leq 100 \text{ ns}$ |
| Input attenuation aE, asym. | 0.1 dB ($\leq 6 \text{ GHz}$) |
| Cut-off frequency f_g (3 dB), asym. (shield) in 50 Ω system | $> 6 \text{ GHz}$ |
| Frequency range | 0 Hz ... 6 GHz |
| Voltage standing wave ratio VSWR in a 50 Ω system | typ. 1.15 ($\leq 6 \text{ GHz}$) |
| Permissible HF power P_{max} at VSWR = xx (50 ohm system) | 30 W (VSWR = 1.15) |
| Capacity (Core-Earth) | typ. 1.5 pF |
| Capacity asymmetrical (shield) | typ. 1.5 pF |
| Surge protection fault message | none |
| Impulse durability (line-earth) | C2 - 10 kV / 5 kA |
| | C3 - 100 A |
| | D1 - 1 kA |
| Impulse durability (line-shield) | C2 - 10 kV/5 kA |
| | C3 - 100 A |

CN-UB-70DC-6-SB - Surge protection device



2803153

<https://www.phoenixcontact.com/us/products/2803153>

| | |
|---|-----------|
| | D1 - 1 kA |
| Alternating current carrying capacity (line-shield) | 5 A - 1 s |

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|------------------|
| Degree of protection | IP68 |
| | IP68 |
| Ambient temperature (operation) | -40 °C ... 90 °C |

Standards and regulations

| | |
|-----------------------|----|
| VDE requirement class | C2 |
| | C3 |
| | D1 |

Standards Information technology specification

| | |
|-----------------------|--------------|
| Standards/regulations | IEC 61643-21 |
| | IEC 61643-21 |

Air clearances and creepage distances

| | |
|--------------------------|------------------------------|
| Standards/regulations | DIN VDE 0110-1 / IEC 60664-1 |
| Standards/specifications | IEC 61643-21 |
| Note | 2000 |

Mounting

| | |
|---------------|---|
| Mounting type | Connection-specific intermediate plugging |
|---------------|---|

CN-UB-70DC-6-SB - Surge protection device




2803153


<https://www.phoenixcontact.com/us/products/2803153>

Drawings

Dimensional drawing

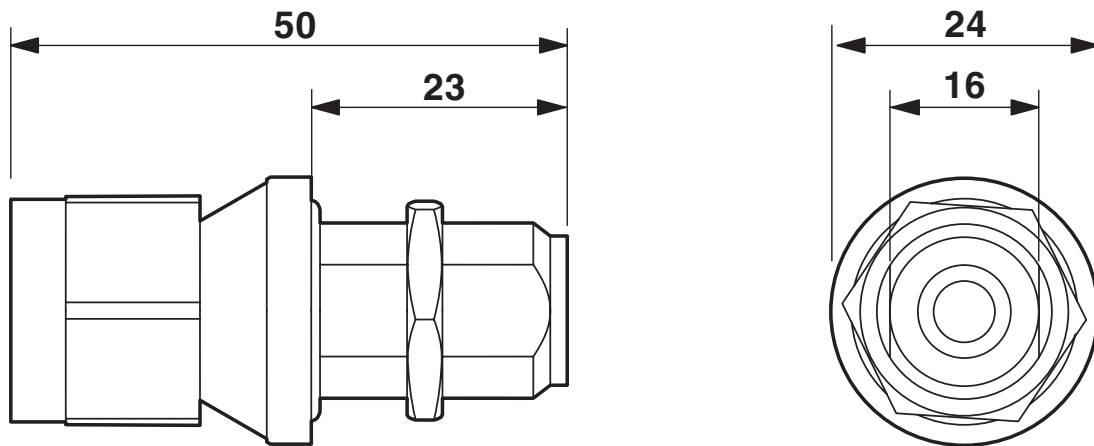

Circuit diagram

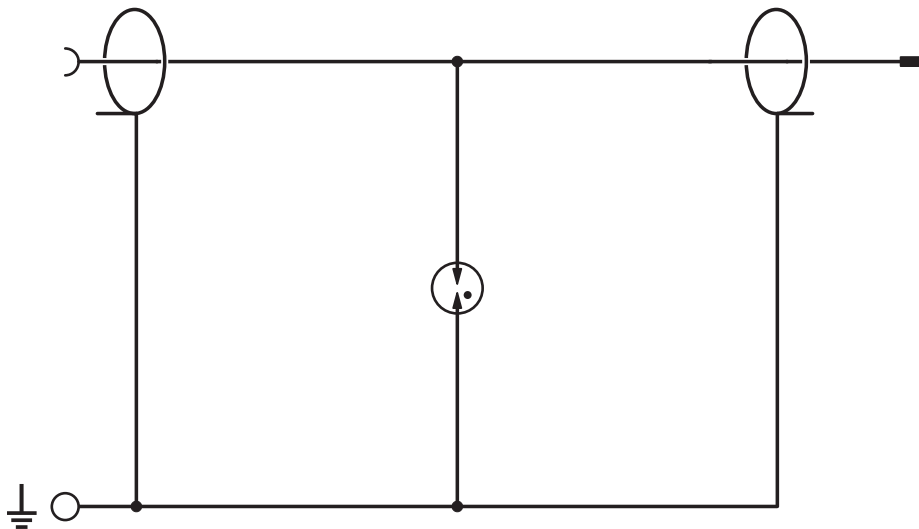

CN-UB-70DC-6-SB - Surge protection device



2803153

<https://www.phoenixcontact.com/us/products/2803153>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27171504 |
| ECLASS-15.0 | 27171504 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC001625 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121600 |
|-------------|----------|

CN-UB-70DC-6-SB - Surge protection device



2803153

<https://www.phoenixcontact.com/us/products/2803153>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

EF3.1 Climate Change

| | |
|---------|---------------|
| CO2e kg | 8.725 kg CO2e |
|---------|---------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com