

MCR-TE-JK-I-E - Thermocouple measuring transducer



2810528

<https://www.phoenixcontact.com/us/products/2810528>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



MCR temperature measuring transducer, for thermocouples type J, K input: 0 - 400°C, 0 - 800°C, 0 - 1000°C, 0 - 1200°C, input electrically isolated, output signal 0(4)...20 mA

The figure shows version MCR-TE-JK-U-E

Commercial data

Item number	2810528
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	NULL
Product key	DK1XXX
Weight per piece (including packing)	139.5 g
Weight per piece (excluding packing)	138.4 g
Customs tariff number	85437090
Country of origin	DE

Technical data

Notes

Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

Product properties

Product type	Temperature transmitter
--------------	-------------------------

Electrical properties

Alignment span	± 5 % (of final value)
Alignment zero	± (60 K)
Limit frequency (3 dB)	30 Hz
Typical cold point errors	± 2.5 K
Cold point error, max.	± 4 K
Test voltage input/output	1.5 kV AC (50 Hz, 60 s)
Test voltage input/power supply	1.5 kV AC (50 Hz, 60 s)
Step response (10-90%)	~ 11 ms
Maximum temperature coefficient	< 0.02 %/K
Maximum transmission error	≤ 1.2 % (of end value, for type K)
	< 2 % (of end value, for type J, 0 °C ... 400°C and 0 °C ... 800°C)
	< 2.5 % (of end value, for type J, 0 °C ... 1000°C and 0 °C ... 1200°C)

Supply

Supply voltage range	18 V DC ... 30 V DC
Max. current consumption	50 mA

Input data

Signal

Input signal	Temperature
--------------	-------------

Measurement

Configurable/programmable	Yes
Sensor types that can be used (TC)	J, K
Temperature measuring range	0 °C ... 400 °C
	0 °C ... 800 °C
	0 °C ... 1000 °C
	0 °C ... 1200 °C
Temperature measuring range: Thermoelement Typ J	0 °C ... 400 °C (fixed setting)
	0 °C ... 800 °C (fixed setting)
	0 °C ... 1000 °C (fixed setting)
	0 °C ... 1200 °C (fixed setting)

MCR-TE-JK-I-E - Thermocouple measuring transducer

2810528

<https://www.phoenixcontact.com/us/products/2810528>

Temperature measuring range: Thermoelement Typ K	0 °C ... 400 °C (fixed setting)
	0 °C ... 800 °C (fixed setting)
	0 °C ... 1000 °C (fixed setting)
	0 °C ... 1200 °C (fixed setting)

Output data


Signal: Current output

Configurable/programmable	Yes
Current output signal	0 mA ... 20 mA
	4 mA ... 20 mA
Max. current output signal	30 mA
Output current with wire break	> 22 mA
Load/output load current output	≤ 500 Ω

Connection data

Connection method	Pluggable screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross-section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross-section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross-section AWG	24 ... 14

Dimensions

Dimensional drawing	
Width	17.5 mm
Height	99 mm
Depth	114.5 mm

Material specifications

Color	green (RAL 6021)
Housing material	Polyamide PA non-reinforced

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-20 °C ... 65 °C
---------------------------------	------------------

Approvals

MCR-TE-JK-I-E - Thermocouple measuring transducer



2810528

<https://www.phoenixcontact.com/us/products/2810528>

CE

Certificate

CE-compliant

UL, USA/Canada

Identification

cULus

Mounting

Mounting position

any

MCR-TE-JK-I-E - Thermocouple measuring transducer




2810528


<https://www.phoenixcontact.com/us/products/2810528>

Drawings

Dimensional drawing

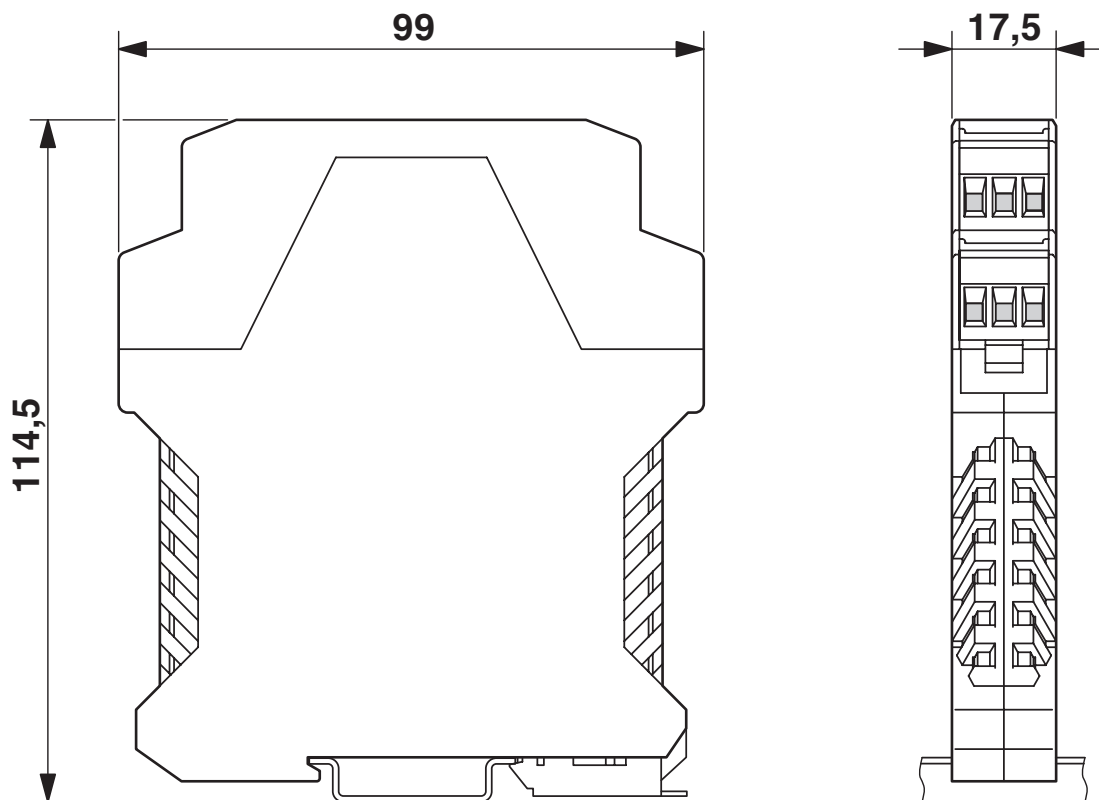

Application drawing

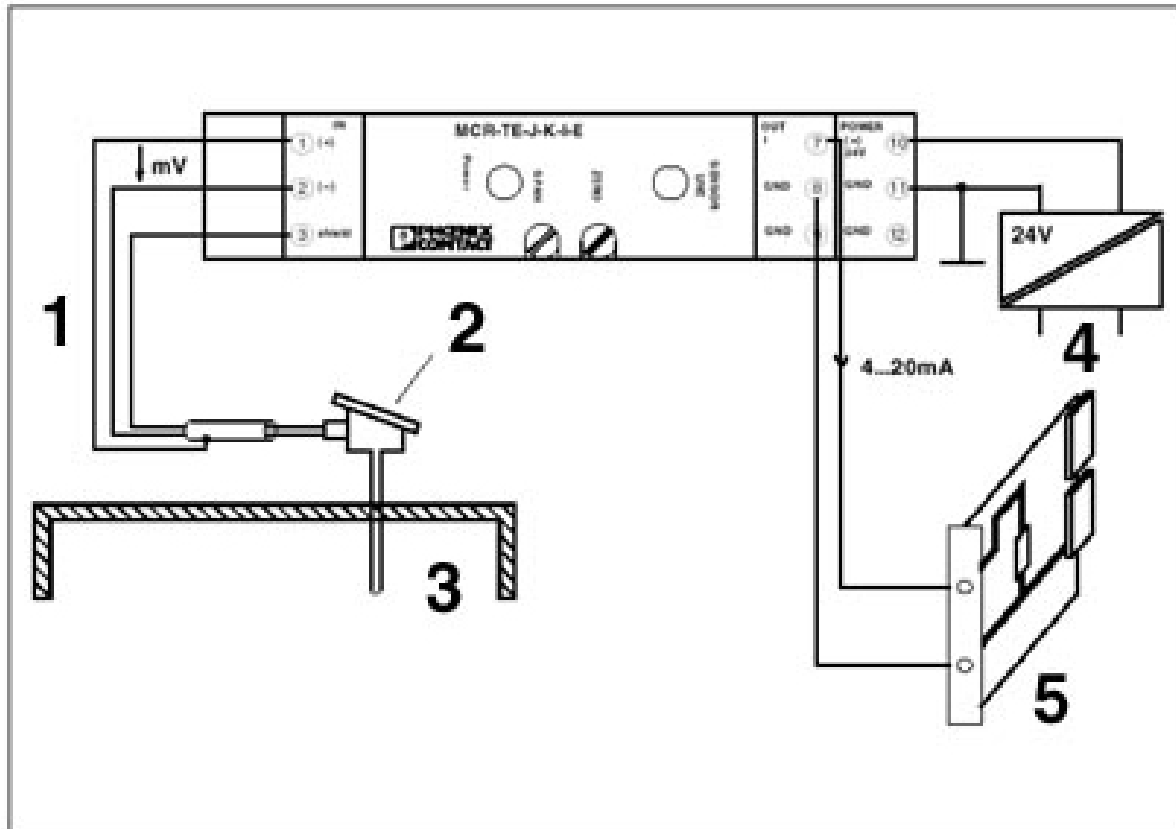

Application example: Temperature measurement of a climatic chamber

- 1 = shielded conductor
- 2 = thermocouple
- 3 = climatic chamber
- 4 = mains voltage
- 5 = control


MCR-TE-JK-I-E - Thermocouple measuring transducer



2810528

<https://www.phoenixcontact.com/us/products/2810528>

Circuit diagram

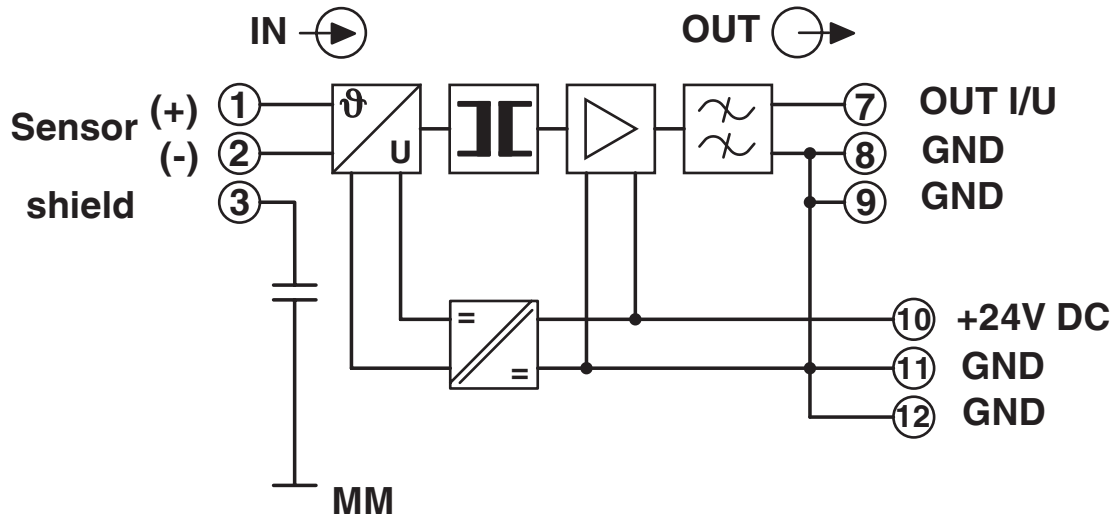

Environmental product compliance

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com