

MCR-SL-PT100-SP - Temperature monitoring



2814948

<https://www.phoenixcontact.com/us/products/2814948>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

MCR temperature relay, for Pt 100 in 2-conductor technology, input: -100 °C ... +700 °C



Your advantages

- Adjustable switching hysteresis
- Electrical isolation
- Relay changeover contact output
- Switching point can be freely selected in the temperature range from -100°C ... +700°C

Commercial data

Item number	2814948
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	C401
Product key	DK1XXX
GTIN	4017918820381
Weight per piece (including packing)	123.5 g
Weight per piece (excluding packing)	101.5 g
Customs tariff number	85437090
Country of origin	DE

Technical data

Notes

Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

Product properties

Product type	Temperature monitoring relay
--------------	------------------------------

Electrical properties

Linearity error	< 0.1 %
Maximum power dissipation for nominal condition	900 mW
Test voltage, input/output/supply	1.5 kV AC (50 Hz, 60 s)
Maximum temperature coefficient	< 0.01 %/K
Temperature coefficient, typical	0.005 %/K

Supply

Supply voltage range	20 V DC ... 30 V DC
Max. current consumption	< 30 mA

Input data

Measurement

Sensor types (RTD) that can be used	Pt 100 (IEC 60751/EN 60751)
Temperature measuring range	-100 °C ... 700 °C
Temperature measuring range: Pt 100	-100 °C ... 700 °C (freely adjustable)
Sensor input current	approx. 1 mA
Connection technology	2-conductor

Output data

Switching: Relay

Contact switching type	1 changeover contact
Contact material	AgSnO, hard gold-plated
Max. switching current	50 mA (for gold layer, 30 V AC/ 36 V DC) 2 A (in case of a destroyed gold layer, 250 V AC)
Typical response time	approx. 6 ms
Typical release time	approx. 200 ms
Status display	Red LED (short-circuit/wire break) Yellow LED (relay active)

Connection data

Connection method	Screw connection
Stripping length	8 mm

MCR-SL-PT100-SP - Temperature monitoring




2814948

<https://www.phoenixcontact.com/us/products/2814948>

Screw thread	M3
Conductor cross-section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross-section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross-section AWG	24 ... 14

Dimensions

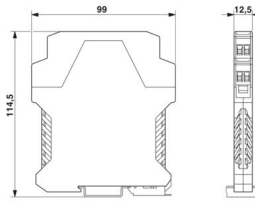Dimensional drawing	
Width	12.5 mm
Height	99 mm
Depth	114.5 mm

Material specifications

Color	green (RAL 6021)
Housing material	Polyamide PA non-reinforced

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 65 °C

Approvals

CE

Certificate	CE-compliant
-------------	--------------

UL, USA/Canada

Identification	UL 508 Recognized
----------------	-------------------

Mounting

Mounting type	DIN rail mounting
Mounting position	any

MCR-SL-PT100-SP - Temperature monitoring


2814948

<https://www.phoenixcontact.com/us/products/2814948>



Drawings


Dimensional drawing

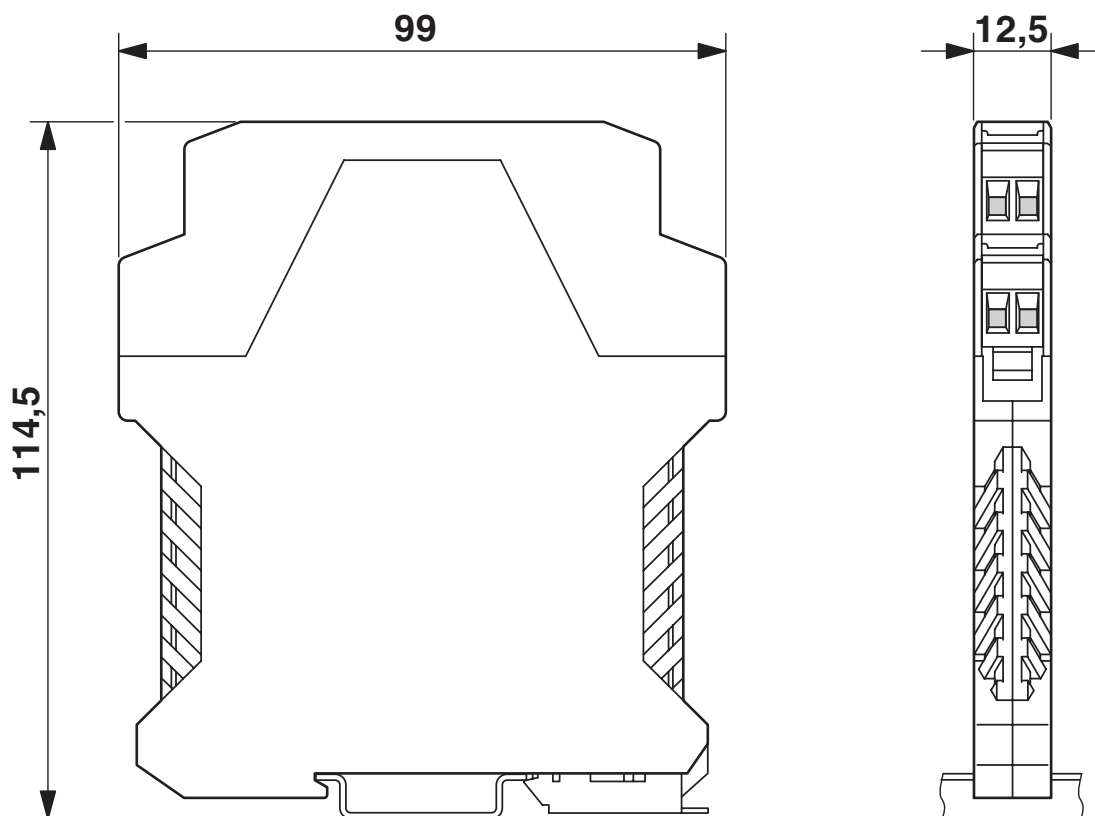

MCR-SL-PT100-SP - Temperature monitoring

2814948

<https://www.phoenixcontact.com/us/products/2814948>

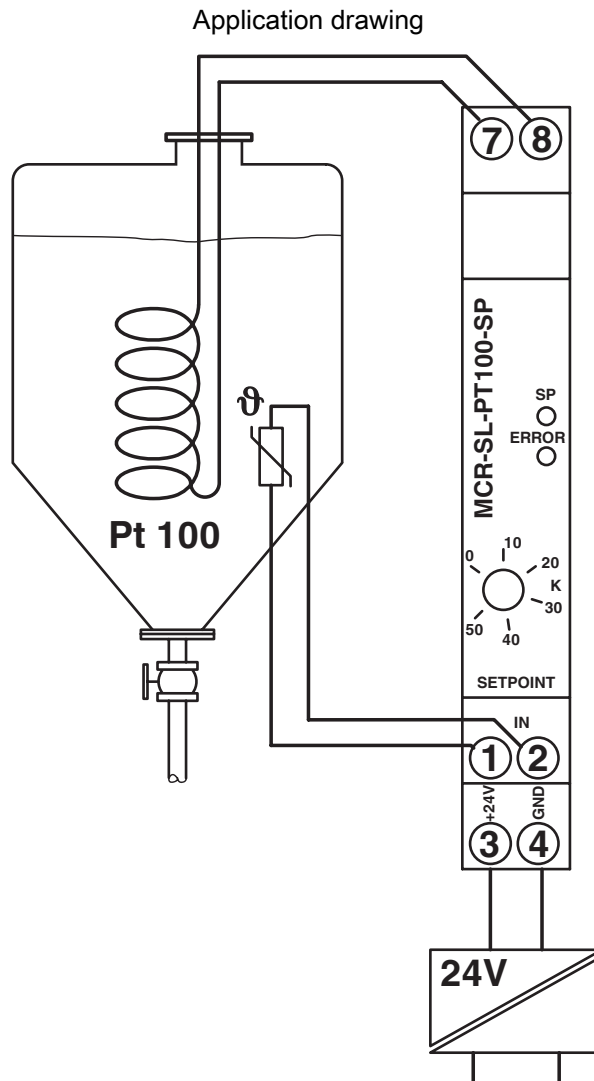


Application example - Temperature control of a heated medium
1 = mains voltage

MCR-SL-PT100-SP - Temperature monitoring

2814948

<https://www.phoenixcontact.com/us/products/2814948>

Circuit diagram

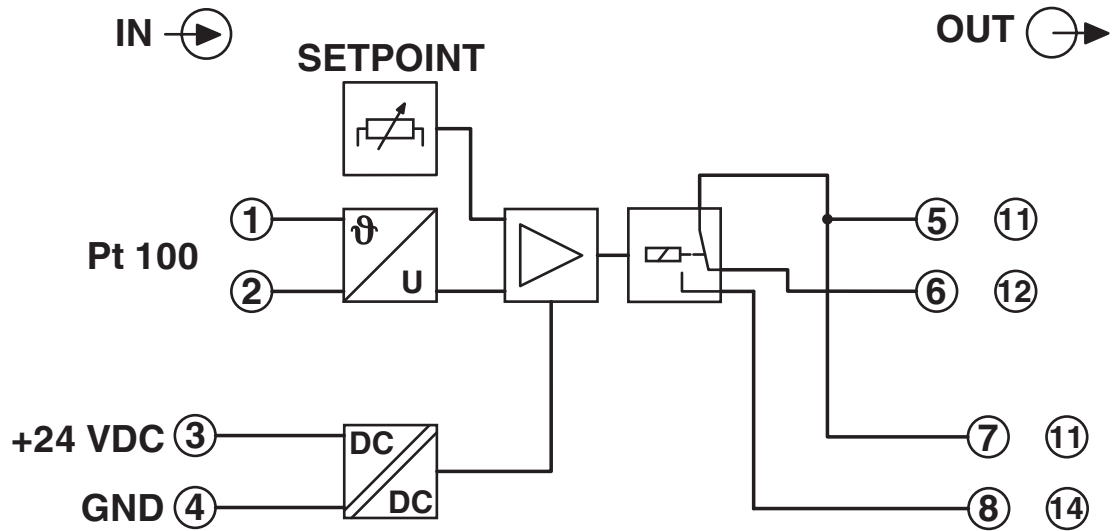

Environmental product compliance

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com