

IB L2-M ADAP 1/1 M12 - Y distributor

2819163

<https://www.phoenixcontact.com/us/products/2819163>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Y plug, for connecting a Loop 2 S Line module with the Loop 2 (M12)



Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2819163 |
| Packing unit | 5 pc |
| Minimum order quantity | 1 pc |
| Sales key | BF10 |
| Product key | AF1GAB |
| GTIN | 4017918193140 |
| Weight per piece (including packing) | 29.44 g |
| Weight per piece (excluding packing) | 26.24 g |
| Customs tariff number | 85366990 |
| Country of origin | PL |

IB L2-M ADAP 1/1 M12 - Y distributor

2819163

<https://www.phoenixcontact.com/us/products/2819163>

Technical data

Notes

| | |
|---------|--|
| General | with center distance of 18 mm, suitable for molded connectors and unshielded connectors that can be assembled with QUICKON IDC terminal block connection technology and a connection range of 0.14 mm ² to 0.34 mm ² |
|---------|--|

Product properties

| | |
|----------------------|---------------|
| Product type | Y-distributor |
| Number of positions | 5 |
| No. of cable outlets | 2 |
| Shielded | no |
| Coding | A |
| Thread type | M12 |

Insulation characteristics

| | |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution | 3 |


Electrical properties

| | |
|--------------------------------|---------|
| Insulation resistance | ≥ 10 GΩ |
| Nominal voltage U _N | 48 V AC |
| | 60 V DC |
| Nominal current I _N | 4 A |

Signaling

| | |
|------------------------|----|
| Status display | no |
| Status display present | no |

Dimensions

| | |
|---------------------|--|
| Dimensional drawing |  |
| Length | 50.1 mm |
| Center distance | 18 mm |

Material specifications

| | |
|--|---|
| Flammability rating according to UL 94 | HB |
| Seal material | NBR |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Contact material | CuZn |
| Contact surface material | Ni/Au |

IB L2-M ADAP 1/1 M12 - Y distributor



2819163

<https://www.phoenixcontact.com/us/products/2819163>

| | |
|-------------------------------|------------------------------|
| Contact carrier material | TPU GF |
| Material for screw connection | Zinc die-cast, nickel-plated |

Connector

Connection 1

| | |
|-------------|---------------------|
| Type | Socket straight M12 |
| Coding type | A |

Connection 2

| | |
|-------------|---------------------|
| Type | Socket straight M12 |
| Coding type | A |

Connection 3

| | |
|-------------|-------------------|
| Type | Plug straight M12 |
| Coding type | A |

Mechanical properties

Mechanical data

| | |
|-----------------------------|-------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|-------|

Environmental and real-life conditions

Ambient conditions

| | |
|---|----------------------------------|
| Degree of protection | IP65 IP67 |
| Ambient temperature (operation) (male connector/female connector) | -25 °C ... 90 °C (Plug / socket) |

Standards and regulations

| | |
|--------------------------|-----------------|
| Standard designation | M12 connector |
| Standards/specifications | IEC 61076-2-101 |


IB L2-M ADAP 1/1 M12 - Y distributor

2819163

<https://www.phoenixcontact.com/us/products/2819163>


Drawings

Dimensional drawing

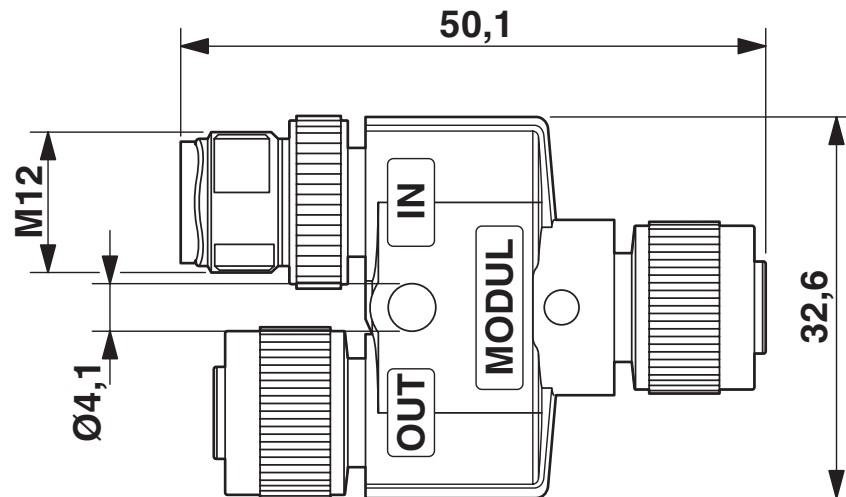

Plug M12 x 1, Y distributor

Schematic diagram

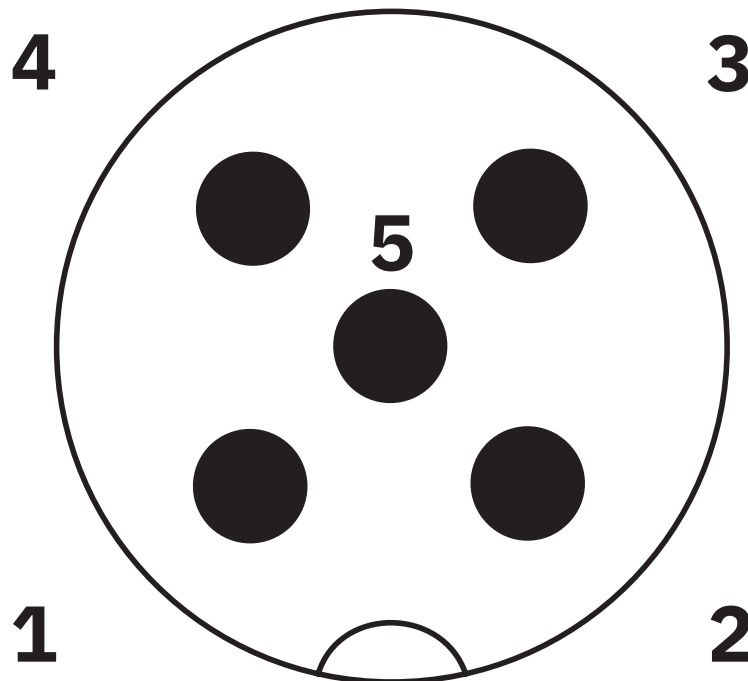


Pin assignment M12 male connector, 5-pos., A-coded, male side

IB L2-M ADAP 1/1 M12 - Y distributor

2819163


<https://www.phoenixcontact.com/us/products/2819163>

Schematic diagram

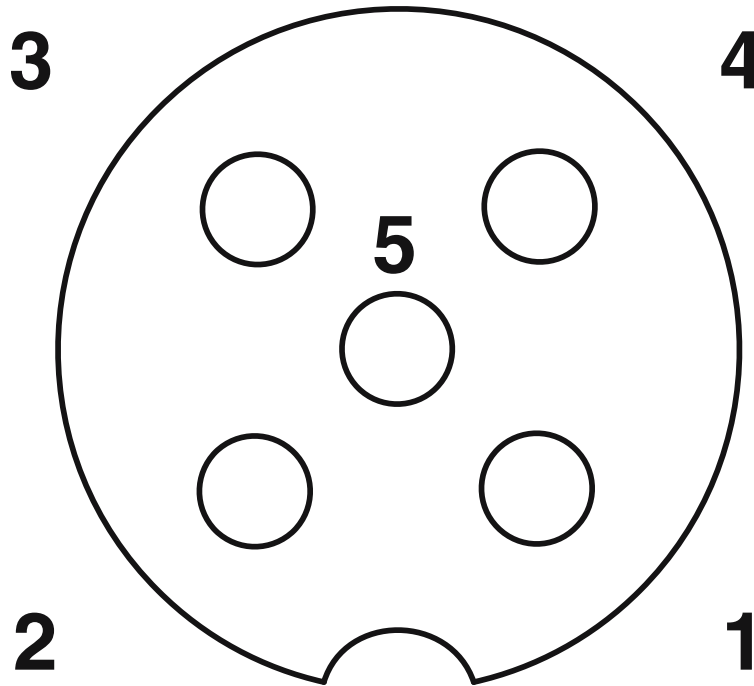

Pin assignment M12 socket, 5-pos., A-coded, socket side view

Schematic diagram

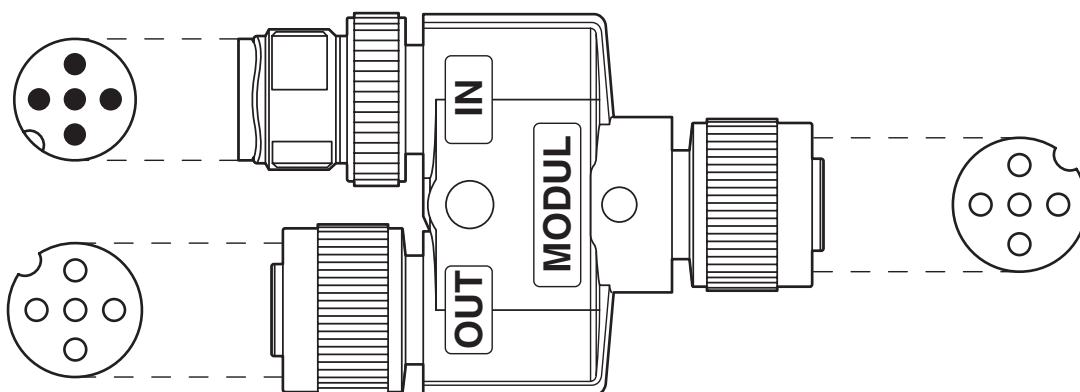


Layout of connector pin assignments

IB L2-M ADAP 1/1 M12 - Y distributor

2819163

<https://www.phoenixcontact.com/us/products/2819163>

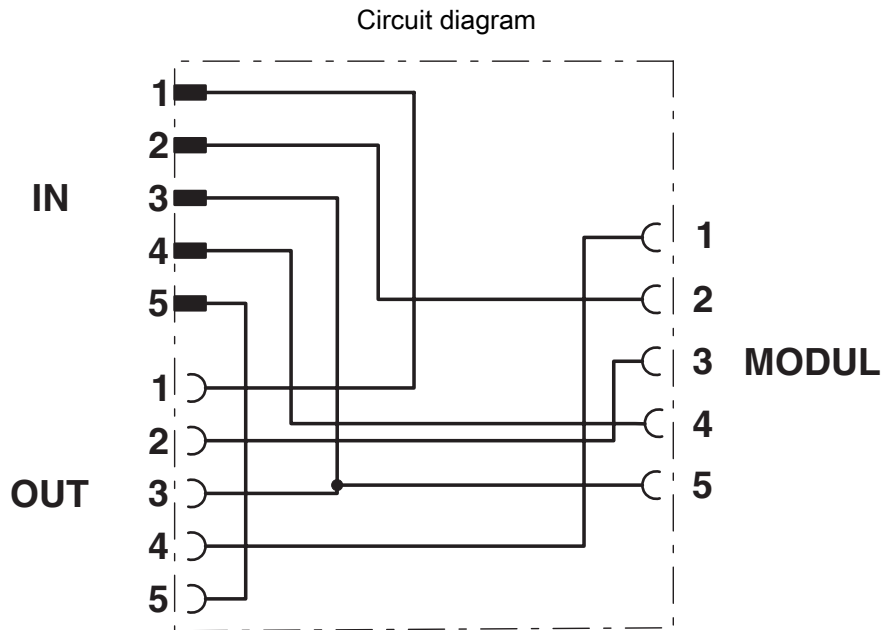

Contact assignment of the M12 Y distributor

IB L2-M ADAP 1/1 M12 - Y distributor



2819163

<https://www.phoenixcontact.com/us/products/2819163>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27440106 |
| ECLASS-15.0 | 27440106 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC002925 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 31251500 |
|-------------|----------|

IB L2-M ADAP 1/1 M12 - Y distributor



2819163

<https://www.phoenixcontact.com/us/products/2819163>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com