# PT 4X1-BE - Surge protection base-element

2839363

https://www.phoenixcontact.com/us/products/2839363

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.







Base element for protective plug PT with protective circuit for 4 conductors of signal circuits grounded on one side, with bridge between the connections 3-4 (GND) and 9-10, for mounting on NS 35/7.5 and NS 35/15, housing width: 17.5 mm

## Your advantages

- Maximum ease of maintenance, thanks to the 2-piece design
- Easy selection for all possible demands in MCR applications with a complete product portfolio
- The signal is not influenced during maintenance work, thanks to the impedance-neutral insertion and removal of protective plugs

## Commercial data

| | |
|---|---|
| Item number | 2839363 |
| Packing unit | 10 pc |
| Minimum order quantity | 1 pc |
| Sales key | CL21 |
| Product key | CL2111 |
| GTIN | 4017918182793 |
| Weight per piece (including packing) | 57 g |
| Weight per piece (excluding packing) | 50.209 g |
| Customs tariff number | 85366990 |
| Country of origin | DE |

## Technical data

### Notes

| | |
|---|---|
| Notes on operation | When the PT...-BE base elements are used, the connections 9/10 (GND) are directly connected to the DIN rail via the metal mounting foot. |

### Product properties

| | |
|---|---|
| Product type | Base element |
| Product family | PLUGTRAB PT |
| Type | Base element, DIN rail mounting |
| Number of positions | 4 |
| Surge protection fault message | none |

Insulation characteristics

| | |
|---|---|
| Overvoltage category | III |
| Pollution degree | 2 |


### Electrical properties

| | |
|---|---|
| Nominal voltage $U_N$ | 48 V AC |

### Connection data

| | |
|---|---|
| Connection method | Screw connection |
| Screw thread | M3 |
| Tightening torque | 0.5 Nm |
| Conductor cross-section flexible | 0.2 mm² ... 2.5 mm² |
| Conductor cross-section rigid | 0.2 mm² ... 4 mm² |
| Conductor cross-section AWG | 24 ... 12 |

### Dimensions

| | |
|---|---|
| Dimensional drawing |   |
| Width | 17.7 mm |
| Height | 90 mm |
| Depth | 51.5 mm (incl. DIN rail 7.5 mm) |
| Horizontal pitch | 1 HP |

### Material specifications

| | |
|---|---|
| Color | black (RAL 9005) |
| | copper color |
| Flammability rating according to UL 94 | V-0 |
| Housing material | PA 6.6 |

## Mechanical properties

Mechanical data

| | |
|---|---|
| Open side panel | No |

## Protective circuit

| | |
|---|---|
| Nominal voltage $U_N$ | 48 V AC |
| Maximum continuous operating voltage $U_C$ | 77 V DC |
| | 55 V AC |
| Rated current | 300 mA (45 °C) |
| Resistance per path | 4.7 Ω ±10 % |
| Max. required back-up fuse | 315 mA (T) |

## Environmental and real-life conditions

Ambient conditions

| | |
|---|---|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -40 °C ... 85 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Altitude | ≤ 2000 m (amsl) |

## Standards and regulations


| | |
|---|---|
| Standards/specifications | IEC 61643-21 |
| Note | 2000 + corrigendum 2001 + A1:2008, modified + A2:2012 |
| Standards/specifications | EN 61643-21 |
| Note | 2001 + A1:2009 + A2:2013 |

## Mounting


| | |
|---|---|
| Mounting type | DIN rail: 35 mm |

## Drawings


Dimensional drawing

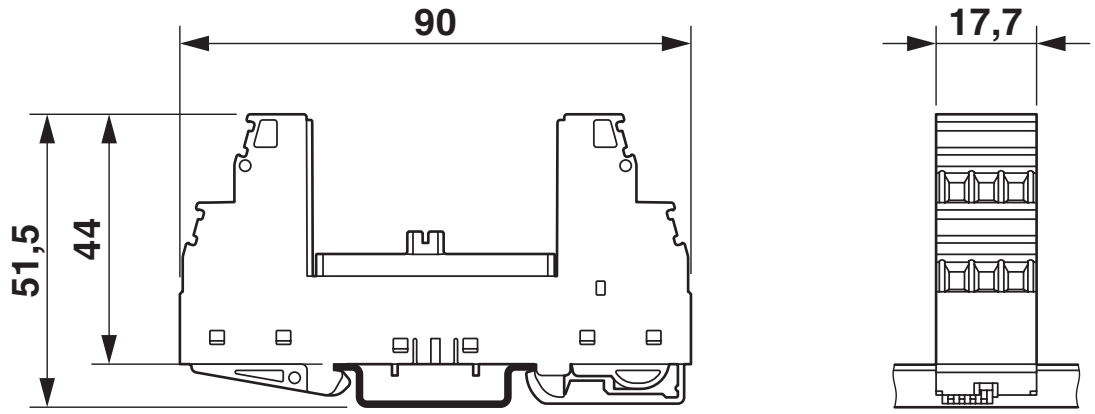


Diagram

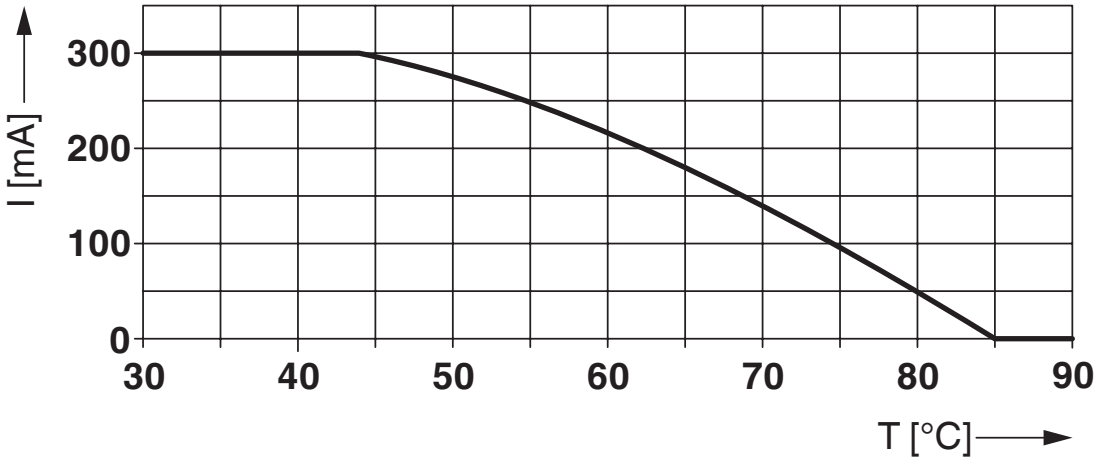

Circuit diagram

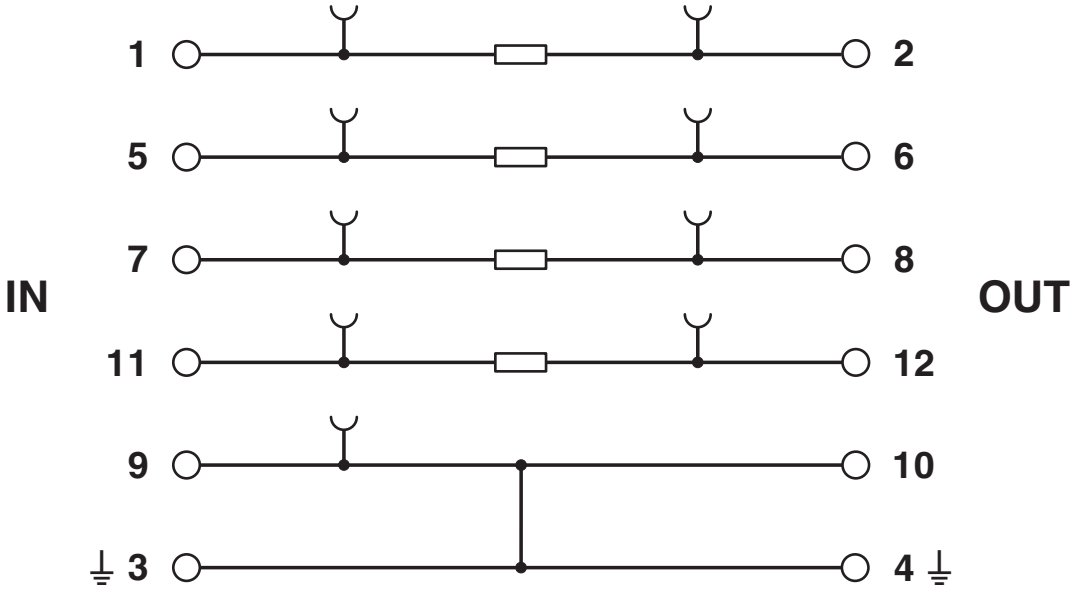

## Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2839363

**DNV GL**
Approval ID: TAE00001N6

**UL Listed**
Approval ID: FILE E 138168

**cUL Listed**
Approval ID: FILE E 333250

**UL Listed**
Approval ID: FILE E 333250

## Classifications

### ECLASS

| | |
|---|---|
| ECLASS-13.0 | 27171592 |
| ECLASS-15.0 | 27171592 |

### ETIM

| | |
|---|---|
| ETIM 10.0 | EC002497 |

### UNSPSC

| | |
|---|---|
| UNSPSC 21.0 | 39121600 |

## Environmental product compliance

EU RoHS

| | |
|---|---|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |

China RoHS

| | |
|---|---|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|---|---|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

Phoenix Contact 2026 © - all rights reserved
https://www.phoenixcontact.com

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com