

# PT 4-F-ST - Surge protection plug



2858441

<https://www.phoenixcontact.com/us/products/2858441>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Surge protection plug for the base element, coarse protection for four signal lines grounded on one side.

## Your advantages

- Easy testing and documentation with CHECKMASTER 2 with pluggable protective modules
- Maximum ease of maintenance, thanks to the 2-piece design
- Easy selection for all possible demands in MCR applications with a complete product portfolio
- The signal is not influenced during maintenance work, thanks to the impedance-neutral insertion and removal of protective plugs

## Commercial data

Item number	2858441
Packing unit	10 pc
Minimum order quantity	1 pc
Sales key	CL21
Product key	CL2111
GTIN	4017918892364
Weight per piece (including packing)	22.29 g
Weight per piece (excluding packing)	19.22 g
Customs tariff number	85363010
Country of origin	DE

# PT 4-F-ST - Surge protection plug

2858441

<https://www.phoenixcontact.com/us/products/2858441>

## Technical data

### Product properties

Product type	Surge protection for MCR technology
Product family	PLUGTRAB PT
IEC test classification	C1
	C2
	C3
	D1
Type	Male
Arrester can be tested with CHECKMASTER from software version:	From SW rev. 1.10
Wire pairs per module	2

### Insulation characteristics

Overvoltage category	III
Pollution degree	2


### Electrical properties

Nominal voltage $U_N$	110 V AC
-----------------------	----------

### Connection data

Connection method	Screw connection (in connection with the base element)
Screw thread	M3
Tightening torque	0.5 Nm
Conductor cross-section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section rigid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross-section AWG	24 ... 12

### Dimensions

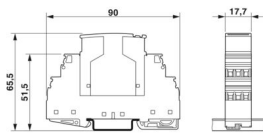Dimensional drawing	
Width	17.7 mm
Height	45 mm
Depth	52 mm
Horizontal pitch	1 Div.
Complete module width	17.7 mm
Complete module height	90 mm
Complete module depth	65.5 mm

### Material specifications

# PT 4-F-ST - Surge protection plug



2858441

<https://www.phoenixcontact.com/us/products/2858441>

Color	black (RAL 9005)
Flammability rating according to UL 94	V-0
Housing material	PA 6.6

## Mechanical properties

### Mechanical data

Open side panel	No
-----------------	----

## Protective circuit

Direction of action	Line-Line & Line-Signal Ground/Shield & Signal Ground/Shield-Earth Ground
Nominal voltage $U_N$	110 V AC
Maximum continuous operating voltage $U_C$	60 V DC 120 V AC
Rated current	2 A AC (80 °C) 150 mA DC (80 °C)
Operating effective current $I_C$ at $U_C$	$\leq 2 \mu\text{A}$
Protective conductor current $I_{PE}$	$\leq 8 \mu\text{A}$ (with PT 4-BE) $\leq 2 \mu\text{A}$ (with PT 4+F-BE)
Nominal discharge current $I_n$ (8/20) $\mu\text{s}$ (line-line)	10 kA
Nominal discharge current $I_n$ (8/20) $\mu\text{s}$ (line-ground)	10 kA
Pulse discharge current $I_{imp}$ (10/350) $\mu\text{s}$ (line-earth)	2.5 kA
Total discharge current $I_{Total}$ (8/20) $\mu\text{s}$	20 kA
Output voltage limitation at 1 kV/ $\mu\text{s}$ (line-earth) spike	$\leq 450 \text{ V}$ (with PT 4-BE) $\leq 600 \text{ V}$ (with PT 4+F-BE)
Output voltage limitation at 1 kV/ $\mu\text{s}$ (line-earth) static	$\leq 25 \text{ V}$ (with PT 4-BE) $\leq 50 \text{ V}$ (with PT 4+F-BE)
Voltage protection level $U_p$ (line-earth)	$\leq 550 \text{ V}$ (C1 - 1 kV / 500 A with PT 4-BE) $\leq 950 \text{ V}$ (C1 - 1 kV / 500 A with PT 4+F-BE) $\leq 600 \text{ V}$ (C2 - 10 kV / 5 kA with PT 4-BE) $\leq 1350 \text{ V}$ (C2 - 10 kV / 5 kA with PT 4+F-BE)
Voltage protection level $U_p$ static (line-earth)	$\leq 50 \text{ V}$ (C1 - 1 kV / 500 A with PT 4-BE) $\leq 100 \text{ V}$ (C1 - 1 kV / 500 A with PT 4+F-BE) $\leq 50 \text{ V}$ (C2 - 10 kV / 5 kA with PT 4-BE) $\leq 100 \text{ V}$ (C2 - 10 kV / 5 kA with PT 4+F-BE)
Response time $t_A$ (line-line)	$\leq 100 \text{ ns}$
Response time $t_A$ (line-earth)	$\leq 100 \text{ ns}$
Input attenuation aE, asym.	typ. 0.1 dB ( $\leq 1 \text{ MHz} / 50 \Omega$ )
Cut-off frequency $f_g$ (3 dB), asym. (signal ground) in 50 $\Omega$ system	typ. 100 MHz
Capacity (Core-Earth)	typ. 2 pF (with PT 4-BE) typ. 2 pF (with PT 4+F-BE)
Resistance per path	0 $\Omega$
Surge protection fault message	none
Max. required back-up fuse	2 A AC (T)

# PT 4-F-ST - Surge protection plug



2858441

<https://www.phoenixcontact.com/us/products/2858441>

	150 mA DC (T)
Impulse durability (line-earth)	C2 - 10 kV / 5 kA
	C1 - 1 kV / 500 A
	C3 - 100 A
	D1 - 2.5 kA

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	≤ 2000 m (amsl)

## Standards and regulations

Standards/specifications	IEC 61643-21
Note	2000 + corrigendum 2001 + A1:2008, modified + A2:2012
Standards/specifications	EN 61643-21
Note	2001 + A1:2009 + A2:2013

## Mounting

Mounting type	on base element
---------------	-----------------


# PT 4-F-ST - Surge protection plug

2858441

<https://www.phoenixcontact.com/us/products/2858441>


## Drawings

Dimensional drawing

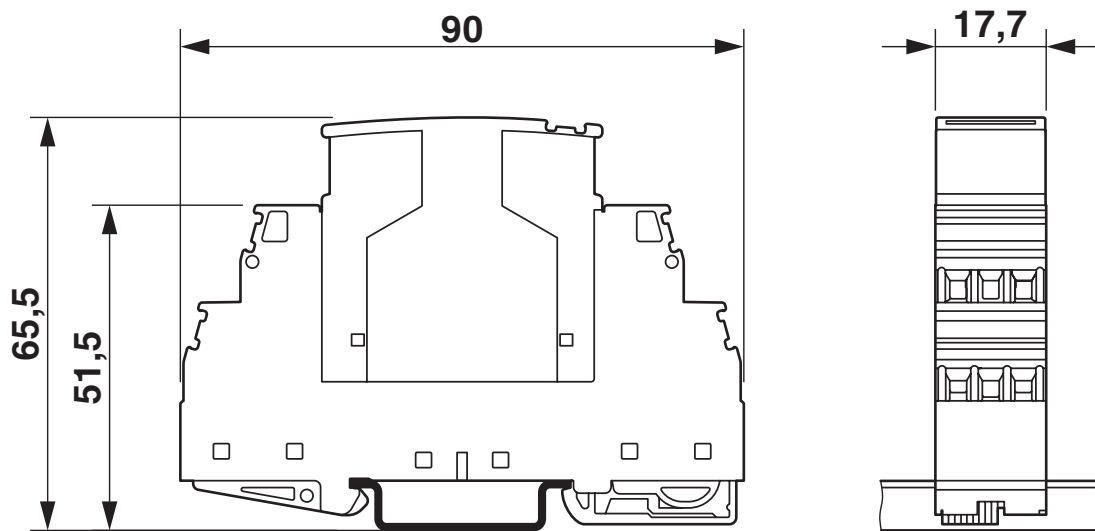

The figure shows the complete module consisting of a base element and connector

Circuit diagram

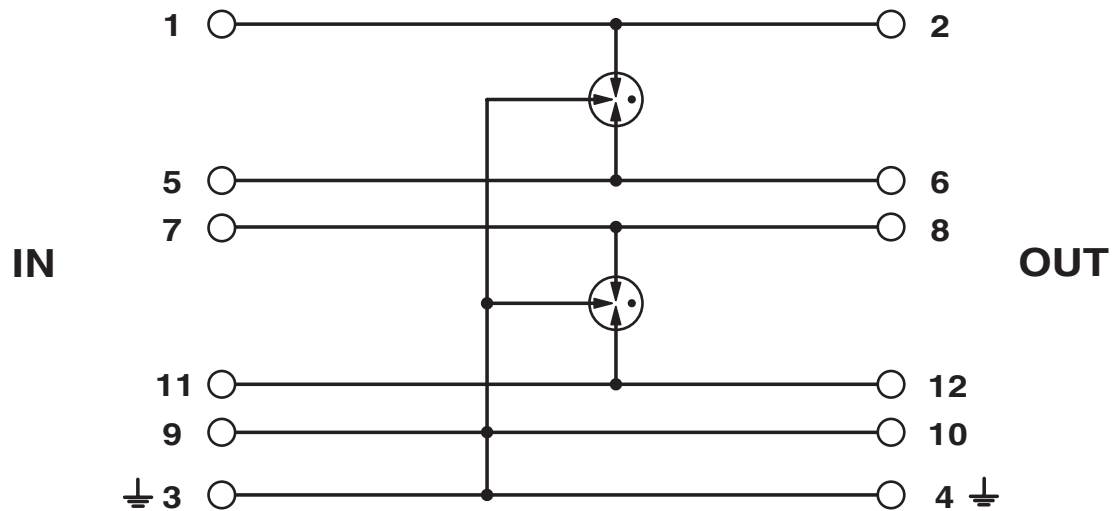

# PT 4-F-ST - Surge protection plug



2858441

<https://www.phoenixcontact.com/us/products/2858441>

## Classifications

### ECLASS

ECLASS-13.0	27171501
ECLASS-15.0	27171501

### ETIM

ETIM 10.0	EC001466
-----------	----------

### UNSPSC

UNSPSC 21.0	39121600
-------------	----------

# PT 4-F-ST - Surge protection plug



2858441

<https://www.phoenixcontact.com/us/products/2858441>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

### EF3.1 Climate Change

CO2e kg	0.404 kg CO2e
---------	---------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)