

# MCR-SL-D-FIT - Digital display



2864024

<https://www.phoenixcontact.com/us/products/2864024>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

MCR digital display, for measuring and displaying frequencies, pulses and times, 6-fig. display



## Commercial data

Item number	2864024
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	C401
Product key	DK1141
GTIN	4017918976477
Weight per piece (including packing)	78.6 g
Weight per piece (excluding packing)	92.6 g
Customs tariff number	90291000
Country of origin	DE

## Technical data

### Product properties

Product type	Digital displays
Configuration	Keyboard

### System properties

#### Functionality

Configuration	Keyboard
---------------	----------

### Electrical properties

#### Supply

Supply voltage range	10 V DC ... 30 V DC
Max. current consumption	max. 40 mA

### Input data

#### Measurement: Frequency

Reset input	Setting function at setting value or zero
Available input sources	NPN/PNP transistor outputs, floating relay contacts
Polarity	Can be programmed jointly for all inputs
Impulse form	Any (Schmitt trigger input), rectangular pulse 1:1 at maximum frequency
Pulse time	min. 5 $\mu$ s
Input frequency	max. 60 kHz (CntDir) max. 25 kHz (UpDown / Up.Up/Quad 1/ Quad 2) max. 15 kHz ((Quad 4))

#### Signal

Signal level "1" signal	$0.6 \times U_B \dots 30 \text{ V DC}$
Signal level "0" signal	$0 \text{ V DC} \dots 0.2 \times U_B$
Switching level "1" signal	$4 \text{ V DC} \dots 30 \text{ V DC}$
Switching level "0" signal	$0 \text{ V DC} \dots 2 \text{ V DC}$
Input resistance of voltage input	10 k $\Omega$
Measuring rate	$0.1 \text{ s}^{-1} / 0.5 \text{ s}^{-1}$

### Output data

#### Switching: Transistor

Maximum switching voltage	30 V DC
Max. switching current	10 mA

#### Signal

Number of positions displayed	6
Display	7-segment LED; 8 mm; red

# MCR-SL-D-FIT - Digital display



2864024

<https://www.phoenixcontact.com/us/products/2864024>

## Connection data

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross-section rigid	0.14 mm <sup>2</sup> ... 1 mm <sup>2</sup>
Conductor cross-section flexible	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross-section AWG	26 ... 16

## Dimensions

Width	48 mm
Height	24 mm
Depth	68 mm

## Material specifications

Housing material	Macrolon 2405
------------------	---------------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP65 (Front)
Ambient temperature (operation)	-20 °C ... 65 °C (10 V DC ... 26 V DC) -20 °C ... 55 °C (> 26 V DC ... 30 V DC)
Ambient temperature (storage/transport)	-25 °C ... 70 °C

## Approvals

### CE

Certificate	CE-compliant
-------------	--------------

### UL, USA/Canada

Identification	UL 863
----------------	--------

## EMC data

Noise immunity	EN 61000-6-2 EN 61000-4-2
----------------	------------------------------

### Noise emission

Standards/regulations	EN 55011 / class B
-----------------------	--------------------

## Mounting

Mounting type	Panel mount
---------------	-------------

# MCR-SL-D-FIT - Digital display



2864024

<https://www.phoenixcontact.com/us/products/2864024>



## Drawings

Dimensional drawing

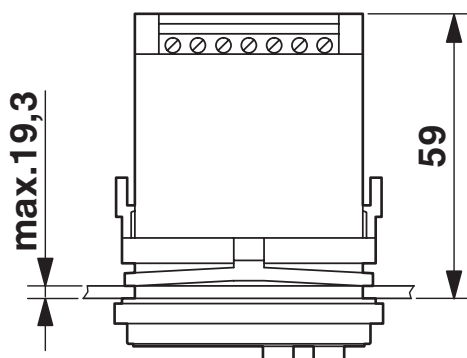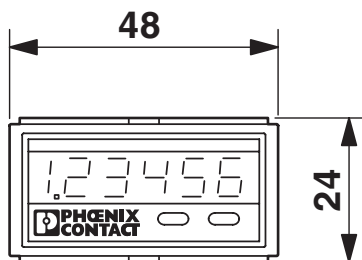


# MCR-SL-D-FIT - Digital display


2864024

<https://www.phoenixcontact.com/us/products/2864024>

Dimensional drawing

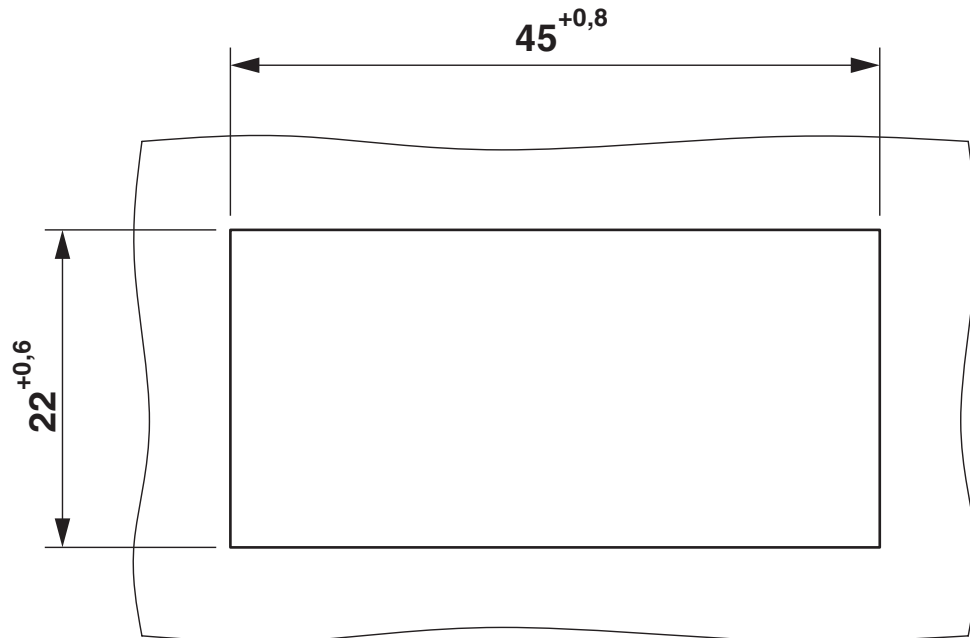

Circuit diagram

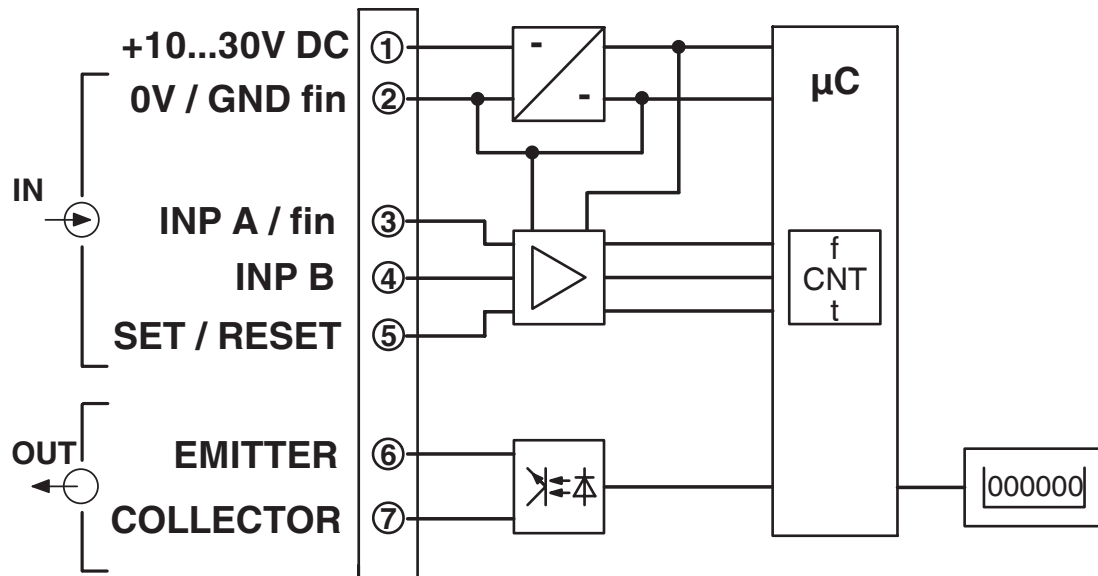


# MCR-SL-D-FIT - Digital display

2864024

<https://www.phoenixcontact.com/us/products/2864024>



Block diagram

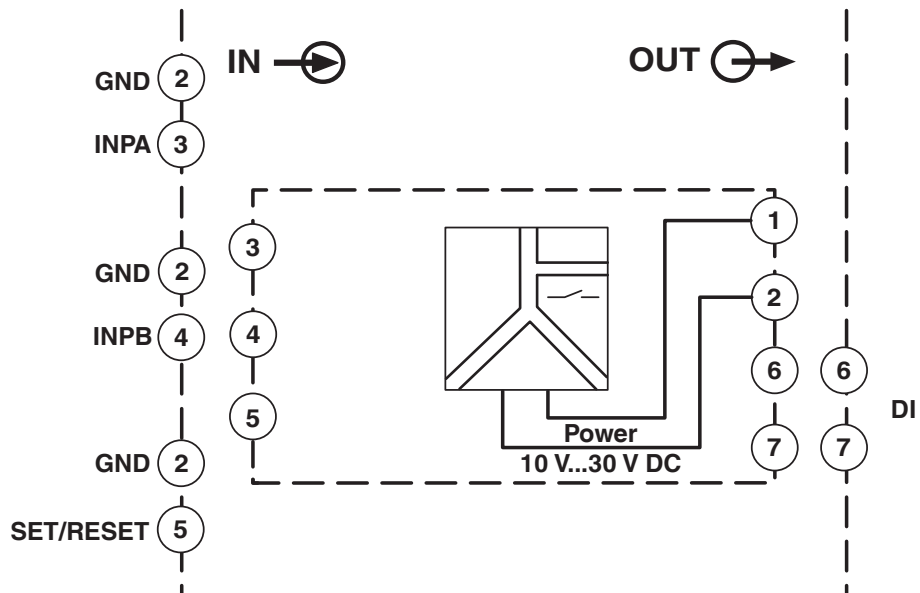

Block diagram MCR-SL-D-FIT

# MCR-SL-D-FIT - Digital display



2864024

<https://www.phoenixcontact.com/us/products/2864024>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2864024>



**cUL Recognized**  
Approval ID: FILE E 197577



**UL Recognized**  
Approval ID: FILE E 197577



**EAC**  
Approval ID: RU\*DE.\*08.B.01522/19

# MCR-SL-D-FIT - Digital display



2864024

<https://www.phoenixcontact.com/us/products/2864024>

## Classifications

### ECLASS

ECLASS-13.0	27210301
ECLASS-15.0	27210301

### ETIM

ETIM 10.0	EC011349
-----------	----------

### UNSPSC

UNSPSC 21.0	39121000
-------------	----------

# MCR-SL-D-FIT - Digital display



2864024

<https://www.phoenixcontact.com/us/products/2864024>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)