

QUINT-BAT/24DC/ 7.2AH - Battery module



2866352

<https://www.phoenixcontact.com/us/products/2866352>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Battery module, lead AGM, VRLA technology, 24 V DC, 7.2 Ah. Connection via pin cable lug, 14 mm.

Product description

QUINT-BAT – battery module with lead AGM technology for maximum buffer times.

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2866352 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | CM24 |
| Product key | CMUEV3 |
| GTIN | 4017918959753 |
| Weight per piece (including packing) | 6,968.5 g |
| Weight per piece (excluding packing) | 6,000 g |
| Customs tariff number | 85072080 |
| Country of origin | CN |

QUINT-BAT/24DC/ 7.2AH - Battery module



2866352

<https://www.phoenixcontact.com/us/products/2866352>

Technical data

Notes

General

| | |
|---------------------|---|
| Note on the battery | This product contains a battery with a limited shelf life that must be charged every few months. The product packaging indicates when the battery must be started up or recharged. The general shelf life can be found in the energy storage devices area under "Latest startup". |
|---------------------|---|

Input data

| | |
|---------------|---------|
| Input voltage | 24 V DC |
|---------------|---------|

Output data

| | |
|---------------------------|---------------------------------------|
| Nominal output voltage | 24 V DC |
| Output current I_{\max} | 50 A |
| Output fuse | 2x 25 A |
| Connection in parallel | yes, for increasing the buffer period |
| Connection in series | no |

Battery operation

| | |
|----------------------------------|---------|
| Nominal output voltage | 24 V DC |
| Nominal output current (I_N) | 50 A |

Energy storage

| | |
|------------------------------------|--|
| Nominal capacity | 7 Ah |
| Service life | 6 Years ... 9 Years (20 °C) |
| Latest startup date (battery only) | 9 Months (20 °C ... 30 °C) 6 Months (30 °C ... 40 °C) |
| Battery technology | VRLA-AGM |
| Memory medium | 7 Ah battery |
| Number of cells | 2 |
| Size designation | Block |
| Battery pack | yes |
| IQ technology | no |
| Suitable for fast charging | yes |

Product properties

| | |
|----------------|--------------------------------------|
| Product type | Battery module |
| Product family | Battery module (device with battery) |
| Application | for QUINT DC-UPS 20A/40A |
| IQ technology | no |

Insulation characteristics

| | |
|------------------|-----|
| Protection class | III |
|------------------|-----|

QUINT-BAT/24DC/ 7.2AH - Battery module



2866352

<https://www.phoenixcontact.com/us/products/2866352>

Dimensions

| | |
|--------|--------|
| Width | 164 mm |
| Height | 156 mm |
| Depth | 110 mm |

Material specifications

| | |
|------------------|--------------------------|
| Housing material | Metal |
| Type of housing | Steel sheet, zinc-plated |

Environmental and real-life conditions

Ambient conditions

| | |
|---|----------------|
| Degree of protection | IP20 |
| Ambient temperature (operation) | 0 °C ... 40 °C |
| Ambient temperature (storage/transport) | 0 °C ... 40 °C |

Approvals

| | |
|-----------------------|----------------|
| Shipbuilding approval | DNV GL (EMC A) |
|-----------------------|----------------|

Ex data

| | |
|----------------------------|----|
| Suited for EX-applications | no |
|----------------------------|----|

QUINT-BAT/24DC/ 7.2AH - Battery module


2866352

<https://www.phoenixcontact.com/us/products/2866352>



Drawings

Block diagram

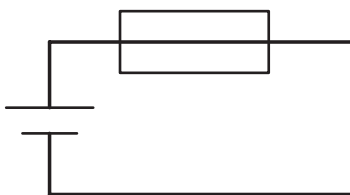

QUINT-BAT/24DC/ 7.2AH - Battery module



2866352

<https://www.phoenixcontact.com/us/products/2866352>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2866352>



EAC

Approval ID: RU S-DE.BL08.W.00764



EAC

Approval ID: RU*DE*01.B.78948/21

DNV

Approval ID: TAA00002EW

QUINT-BAT/24DC/ 7.2AH - Battery module



2866352

<https://www.phoenixcontact.com/us/products/2866352>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27050403 |
| ECLASS-15.0 | 27050403 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC003893 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 26111700 |
|-------------|----------|

QUINT-BAT/24DC/ 7.2AH - Battery module



2866352

<https://www.phoenixcontact.com/us/products/2866352>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-3 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | d913a37f-5b27-4b30-84d4-c1f18bdb37a0 |

EF3.1 Climate Change

| | |
|---------|--------------|
| CO2e kg | 17.3 kg CO2e |
|---------|--------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com